


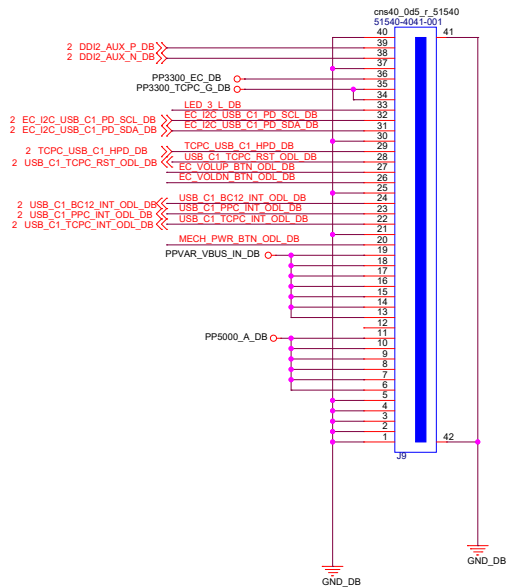
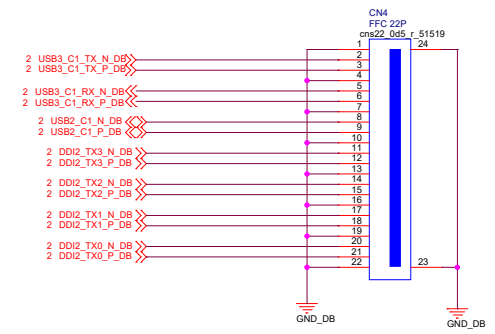





0.7A PER PIN
SV: 5A
PPVAR_VBUS_IN: 3A
PP3300_TCPC_G: <.7A
PP3300_MST: <.7A
PP3300_H1_G: <.7A

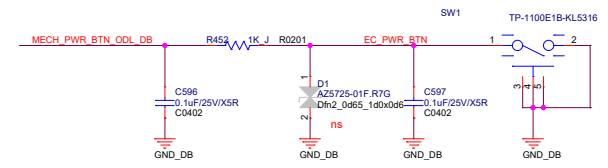

DAUGHTER BOARD




POWER BUTTON

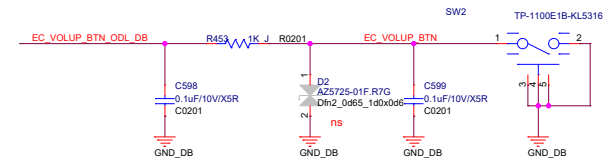



VOLUME BUTTONS

STUFF FOR POWER BUTTON (CONVERTIBLE)

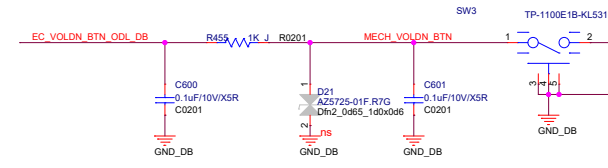



BITLAND		Bitland Information Technology Co.,Ltd.	
Page Name		SUB: MLB CONNECTOR	
Size	Project Name	Rev	
C	Akemi	1.0	
Date: Wednesday, February 28, 2020		Sheet	1 of 2
PROPERTY NOTE: this document contains information confidential and property to Bitland Technology Co.,Ltd. and shall not be reproduced or transferred to other documents or disclosed to others or used for any purpose other than that for which it was obtained with the expressed written consent of Bitland			

BC1.2

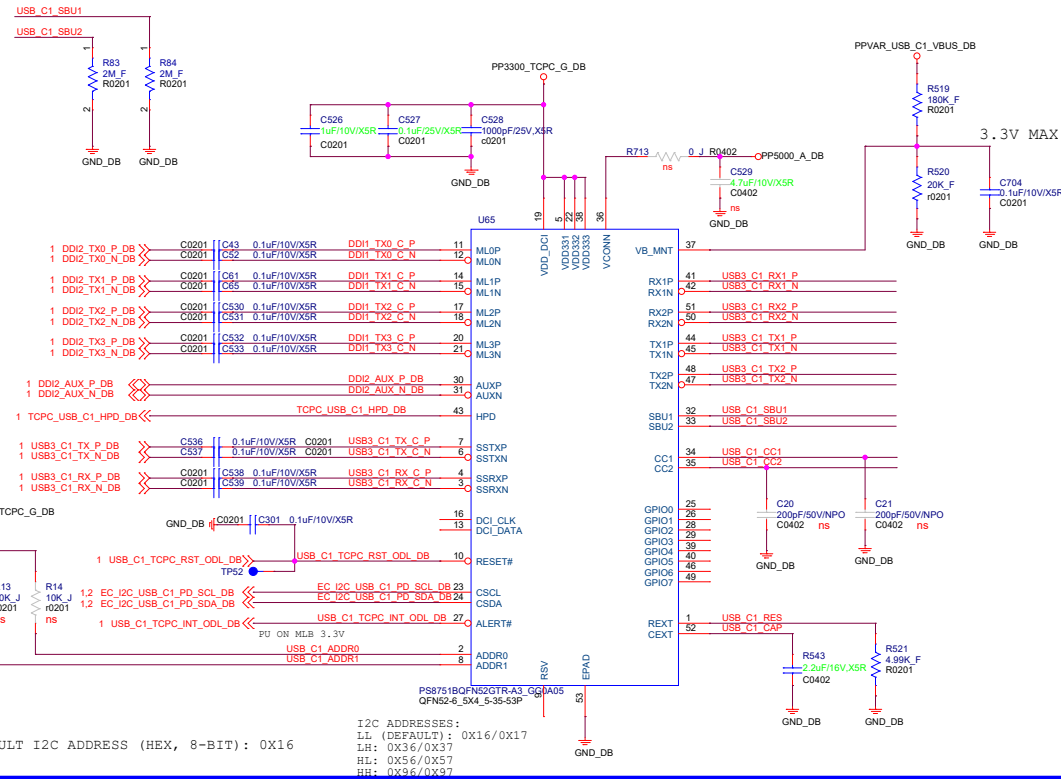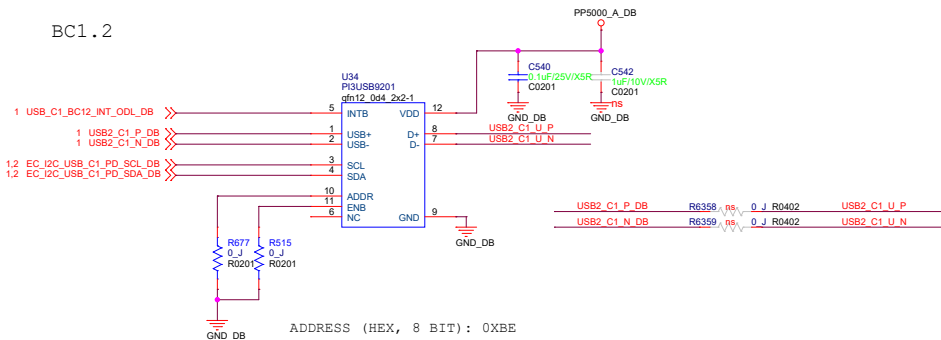

DEFAULT I2C ADDRESS (HEX, 8-BIT): 0X16

I2C ADDRESSES:
LL (DEFAULT): 0X16/0X17
LH: 0X36/0X37
HL: 0X56/0X57
HH: 0X96/0X97

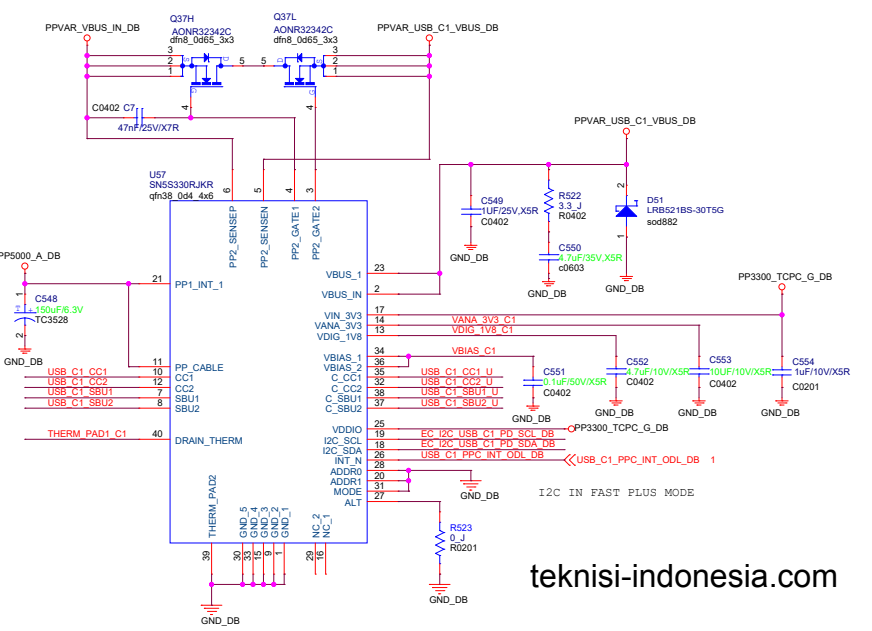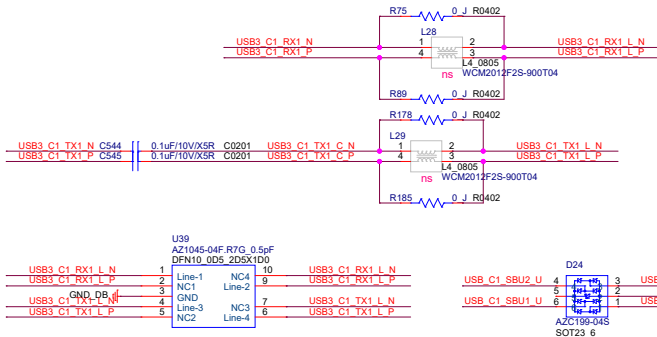

teknisi-indonesia.com

