




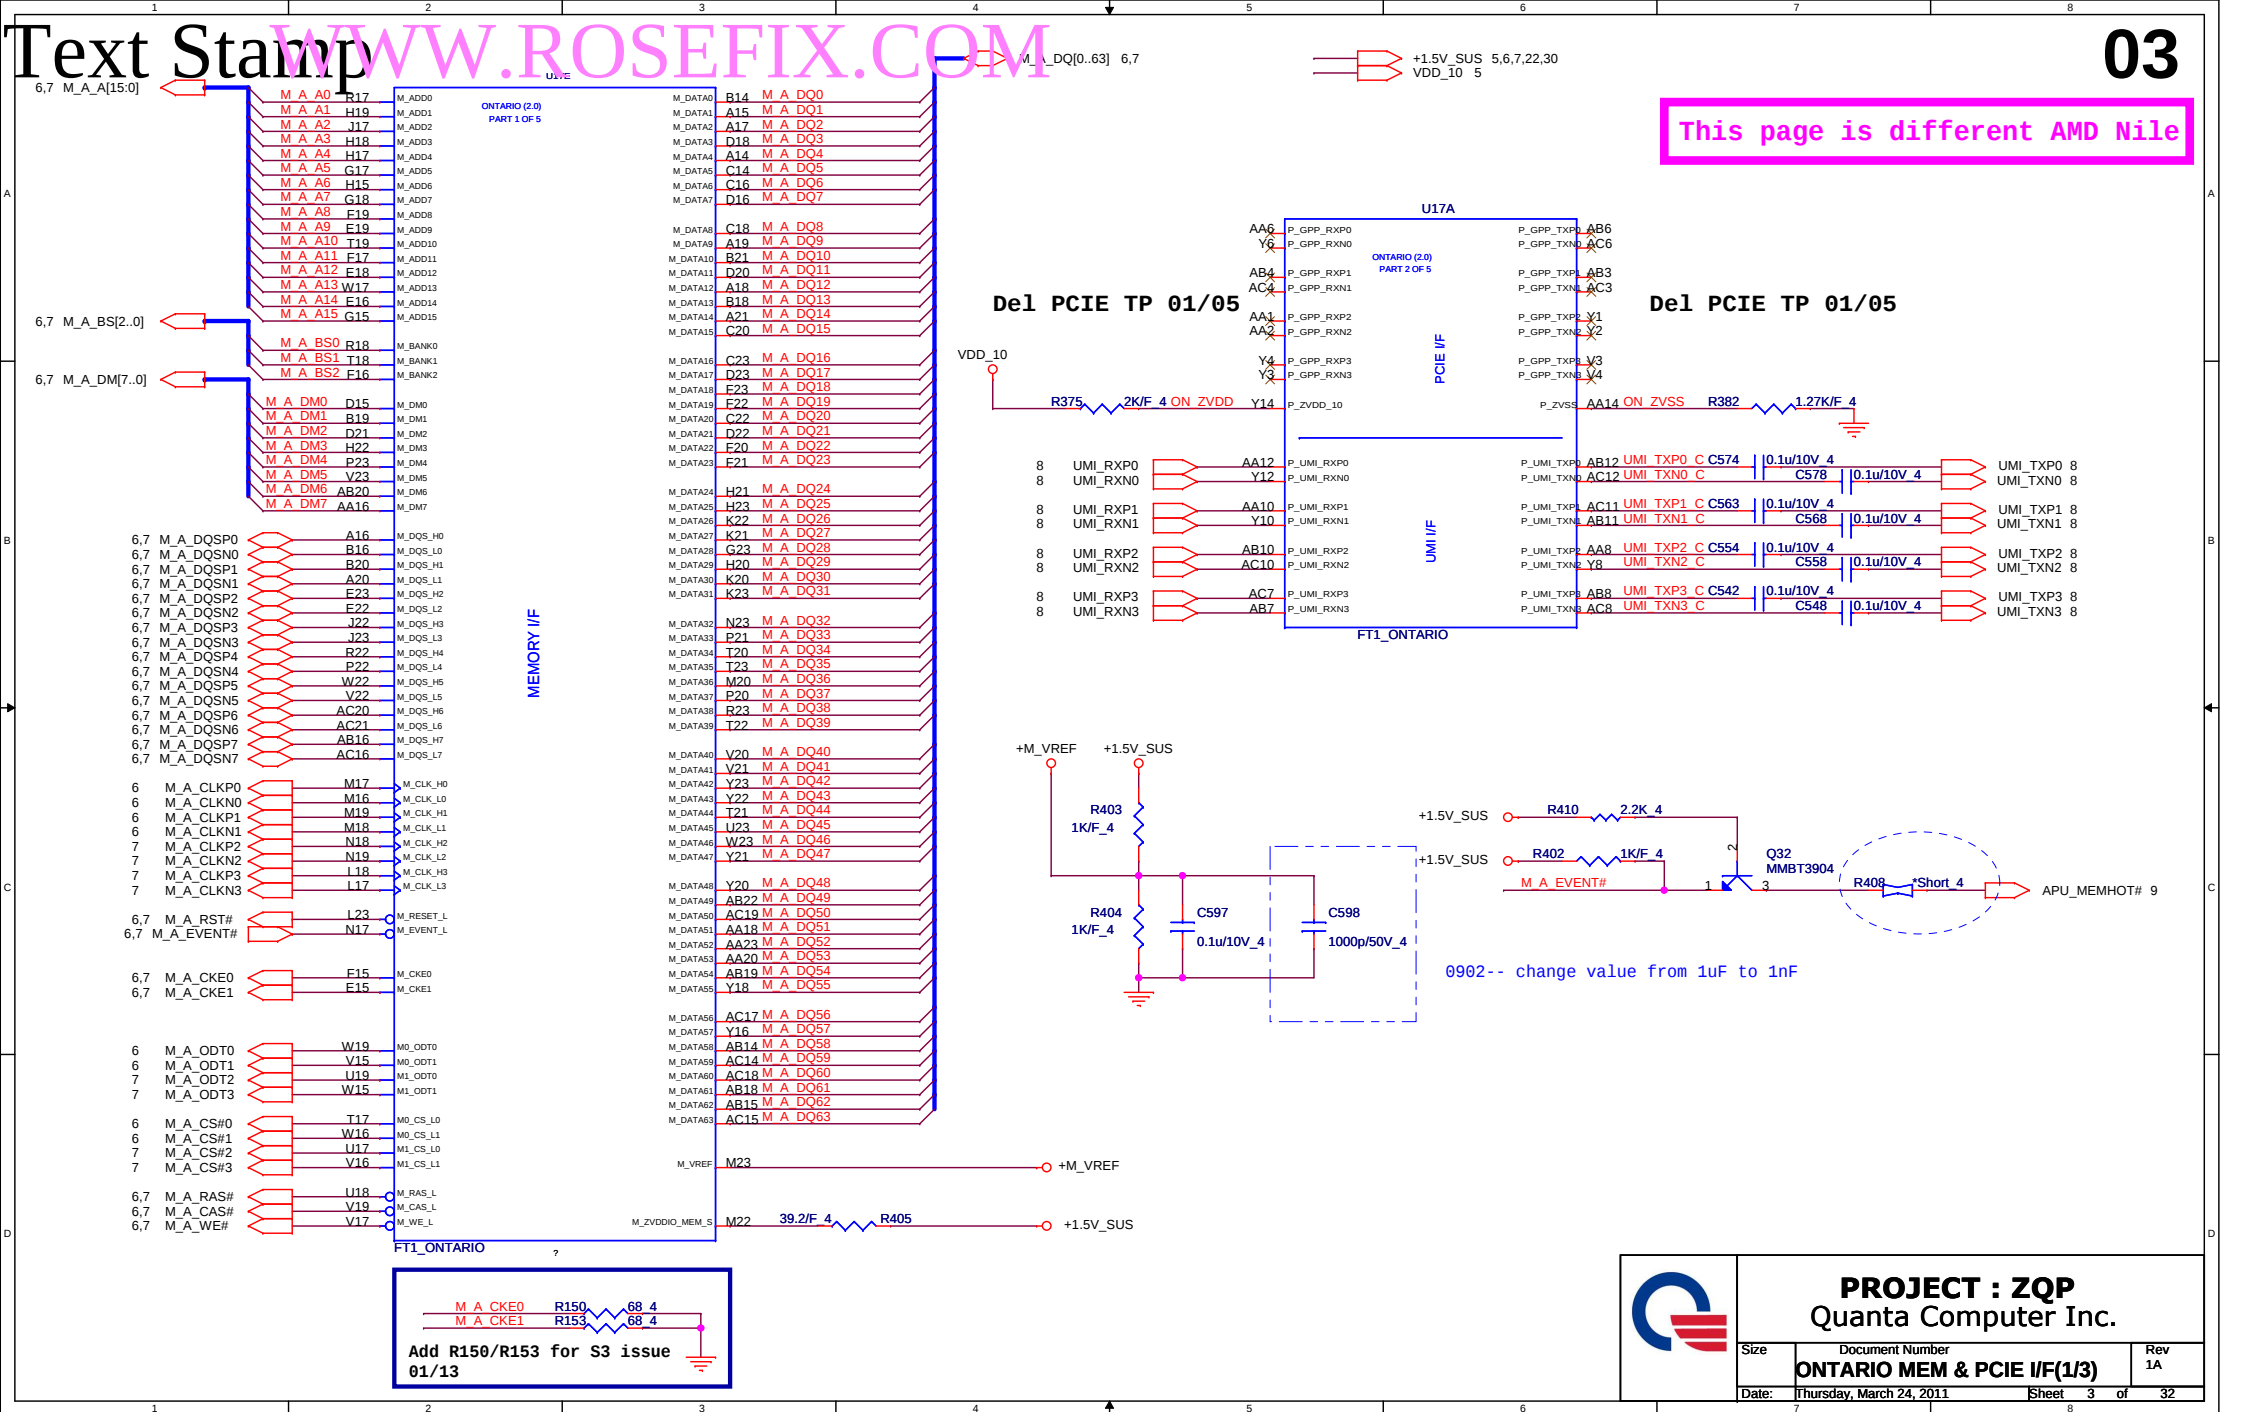
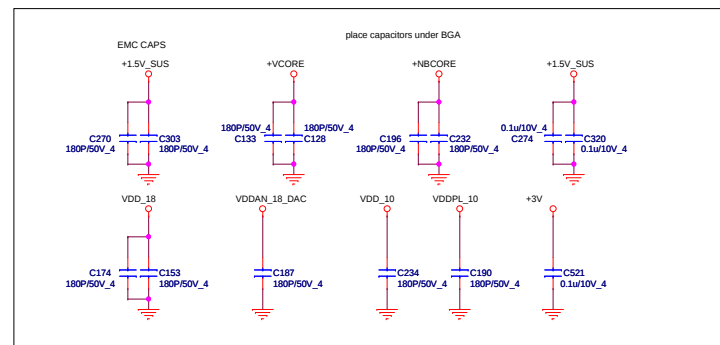


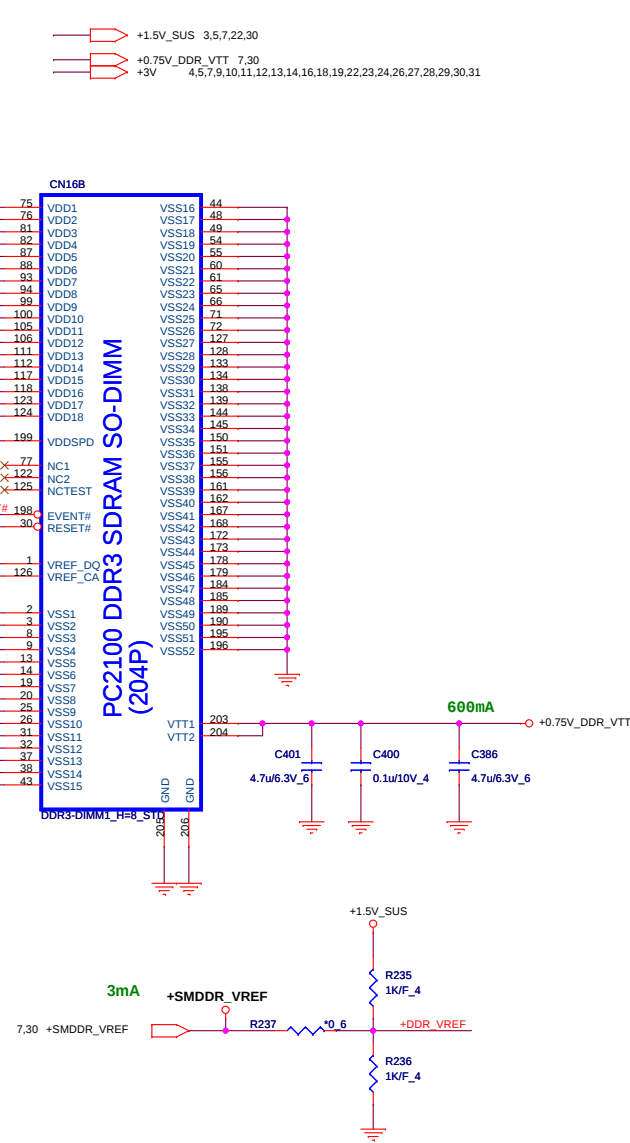


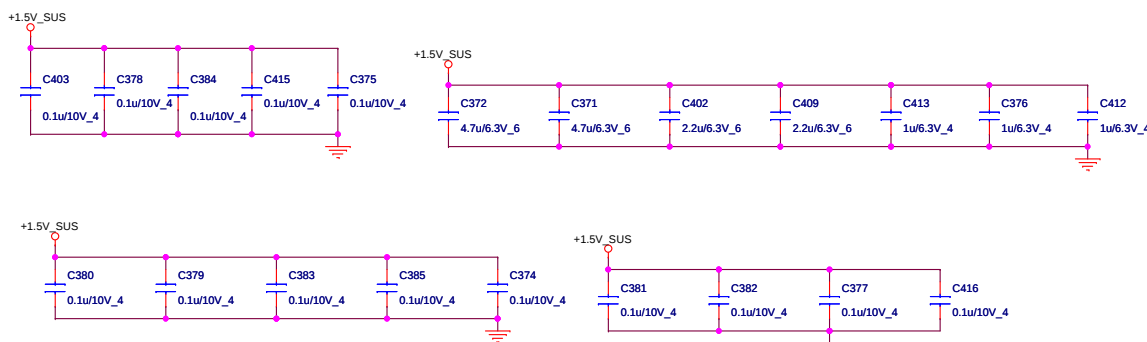

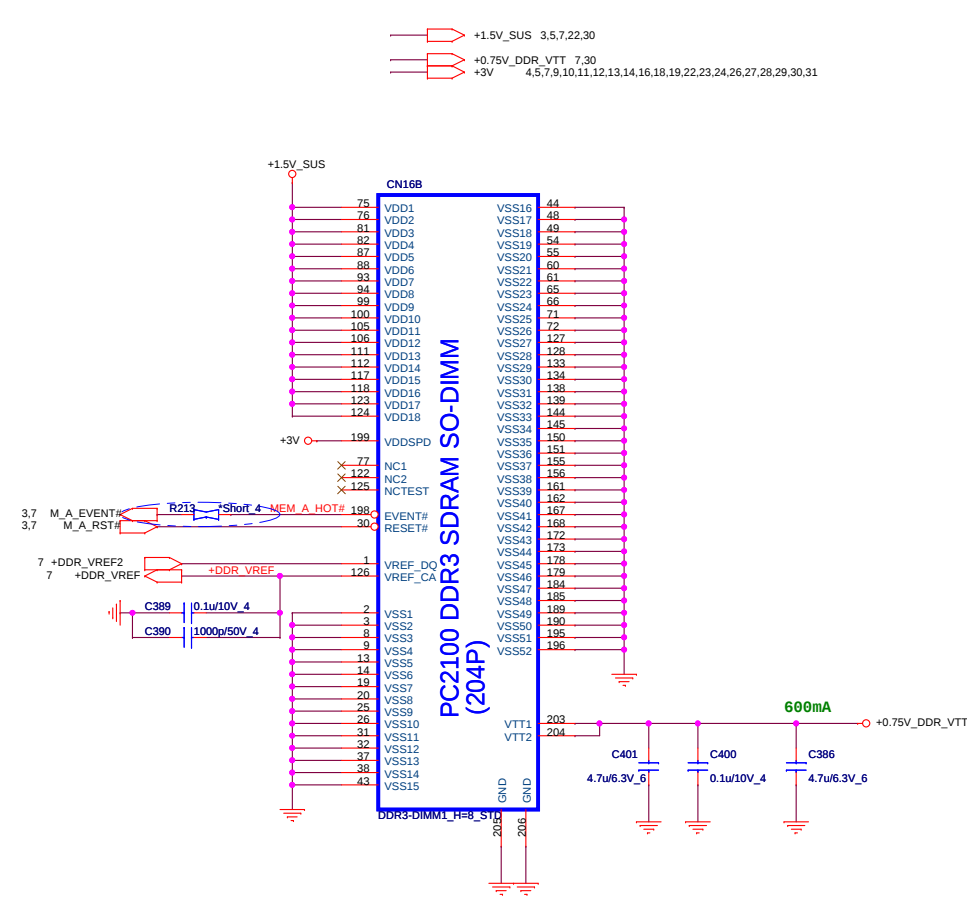


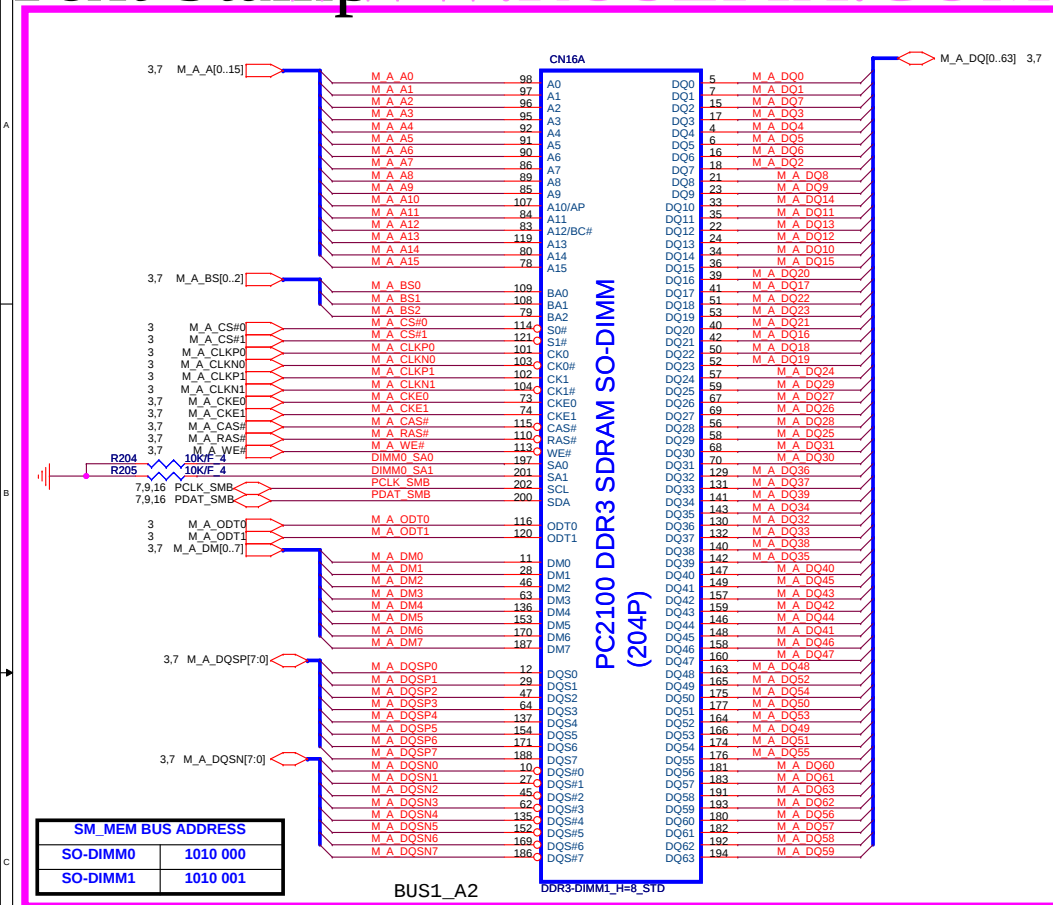

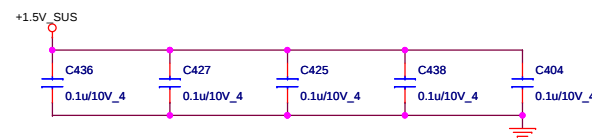

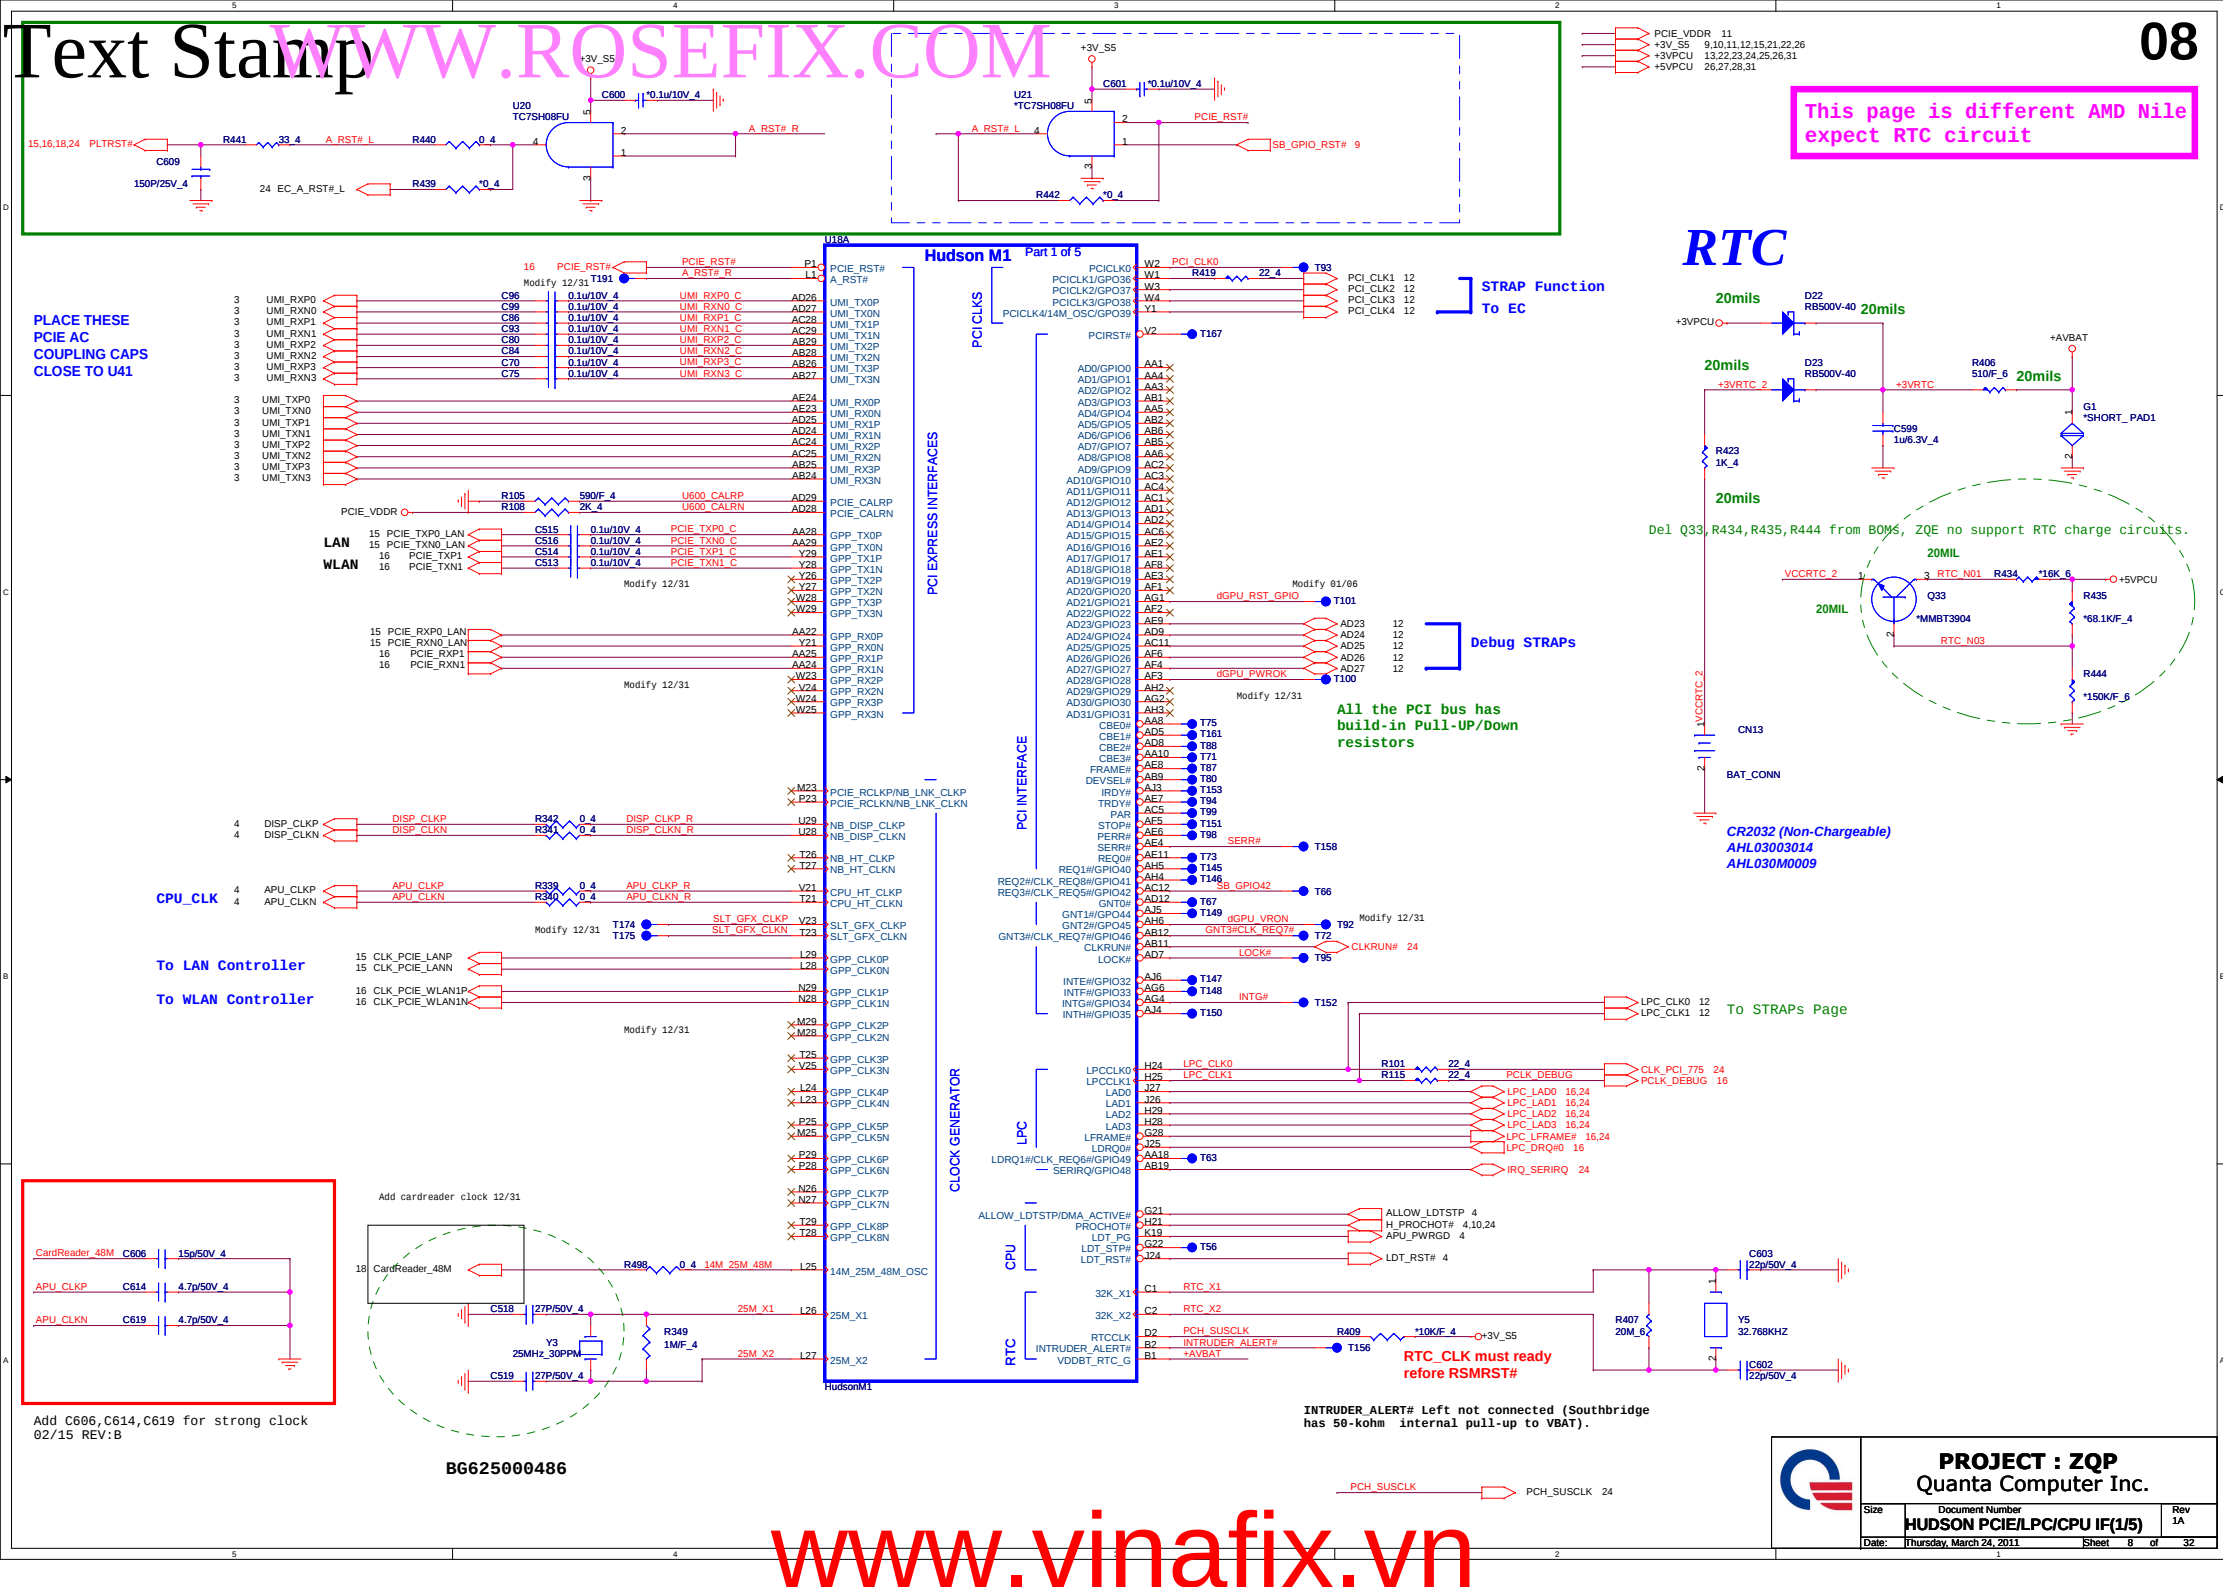

This page is different AMD Nile

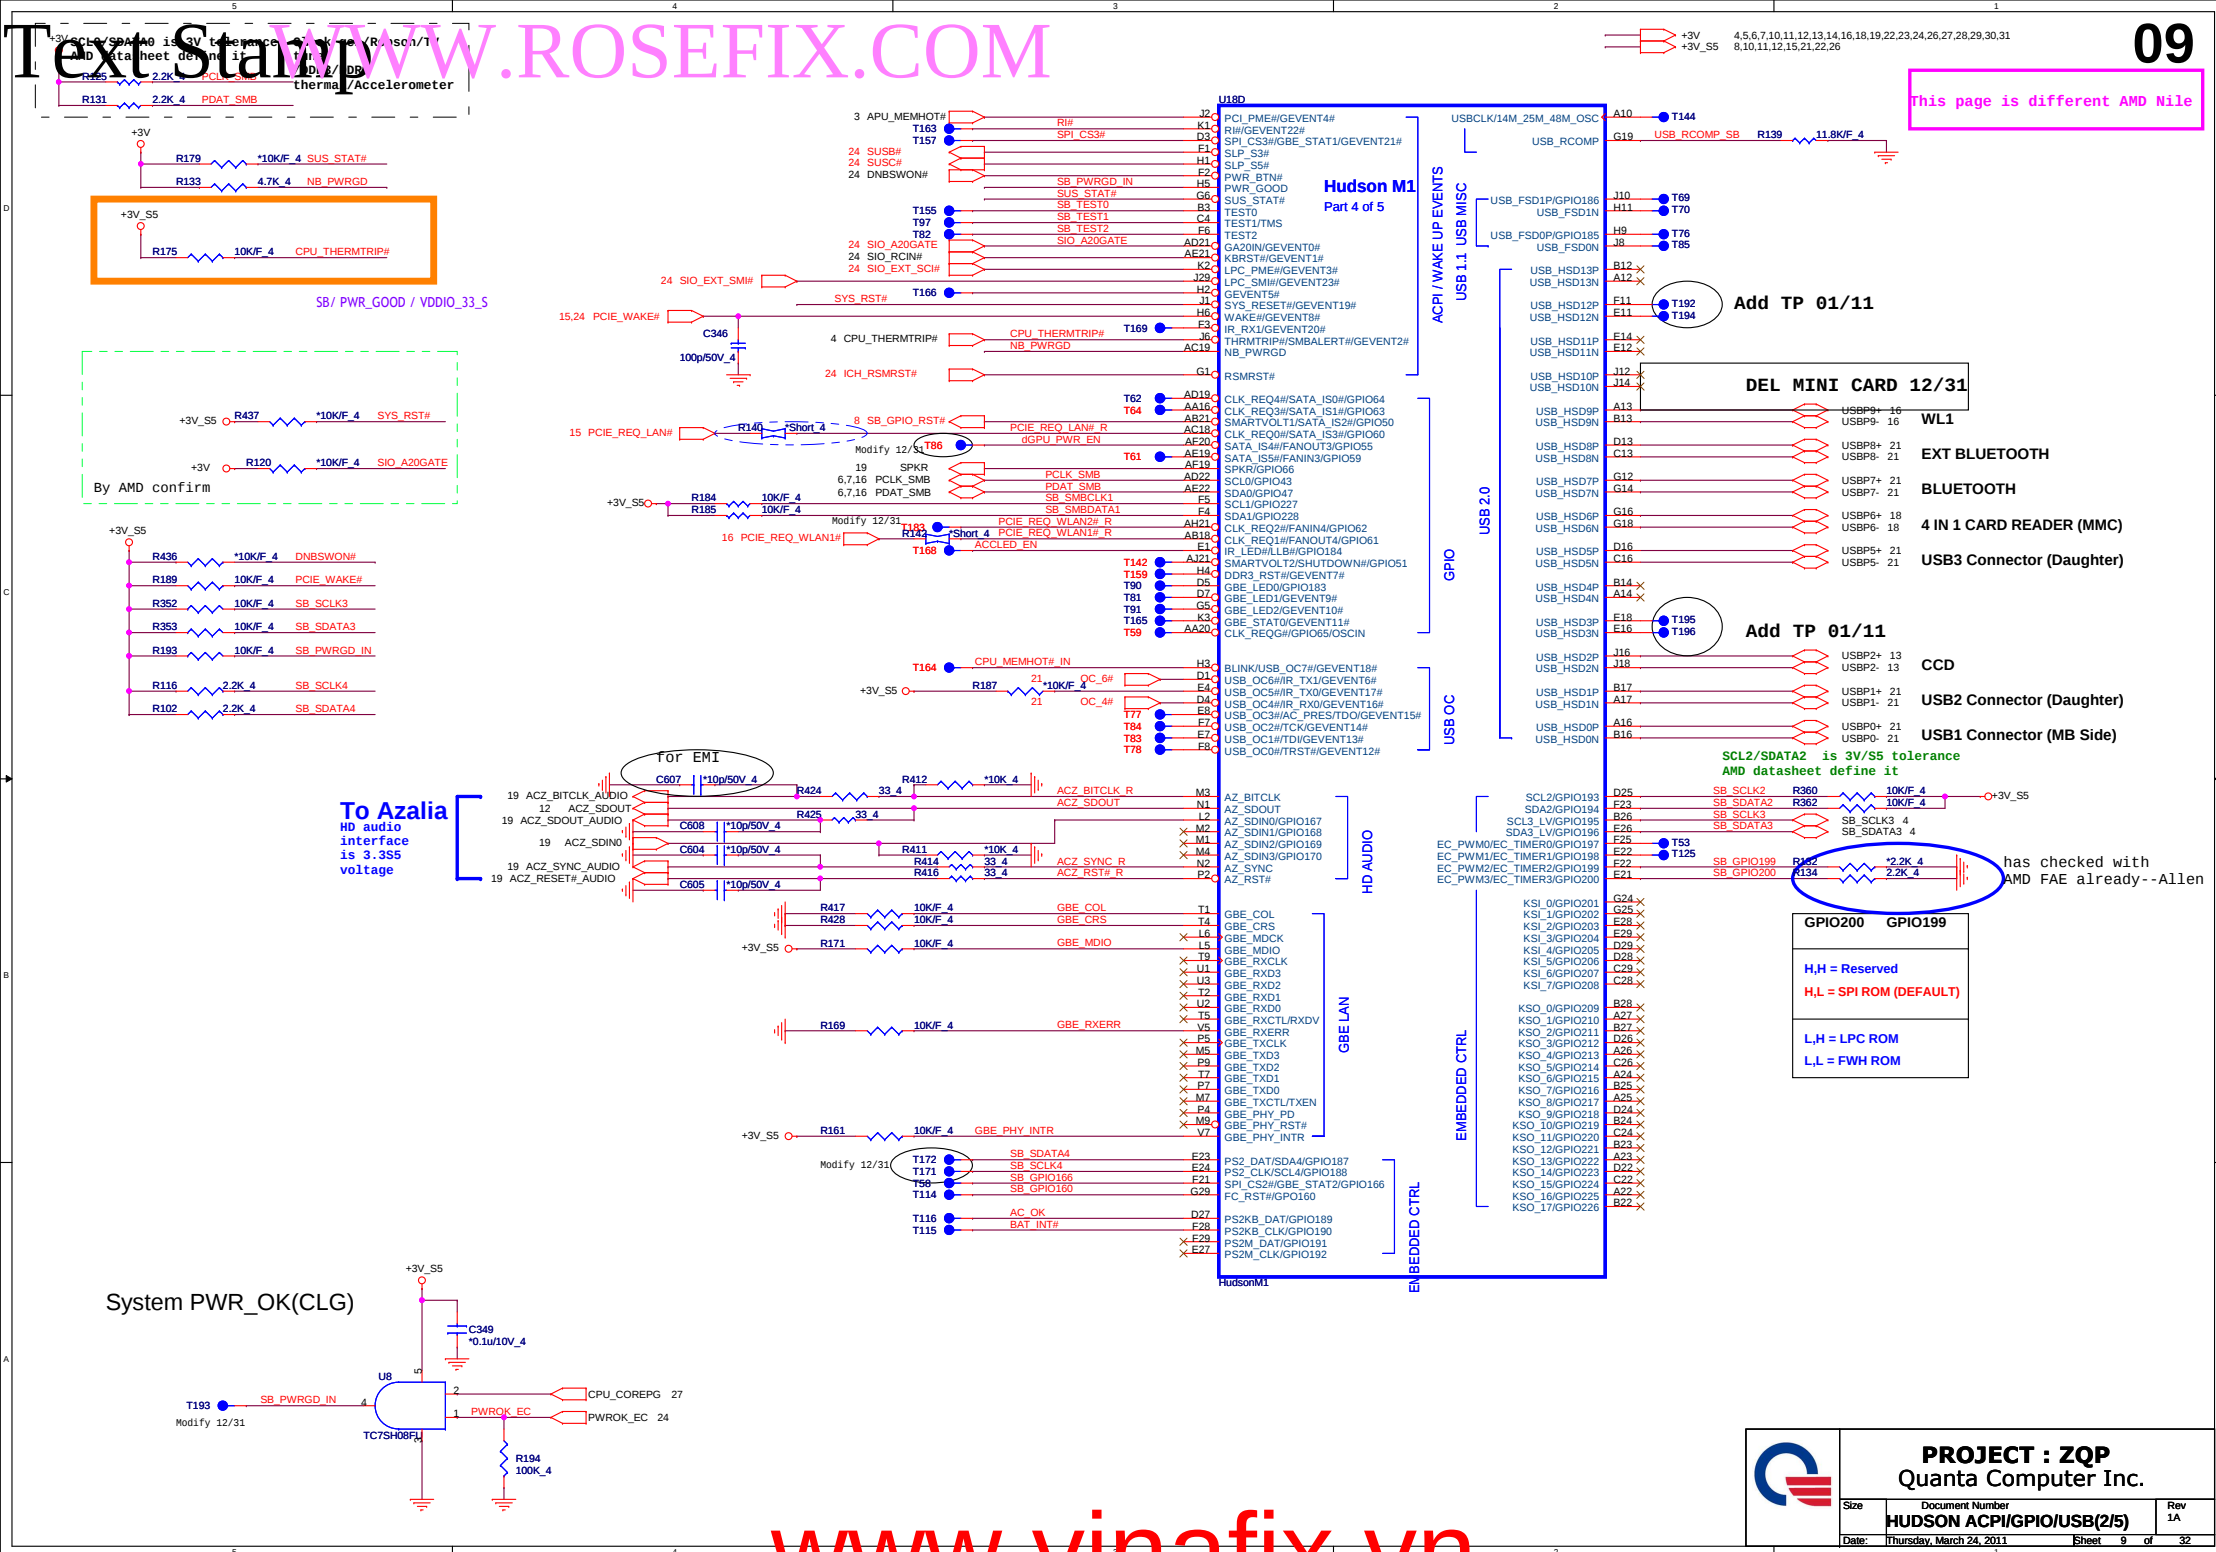

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Text Stamp WWW.ROSEFIX.COM

www.vinafix.vn

Model Stamp			Model		ZQE/G M/B BOARD	
CHANGE LIST			Page	From	To	
ZQP/Q M/B	A	First Release	1	1A	3A	
			2	1A	3A	
			3	1A	3A	
B	B	01.P14: Add HDMI function 02.P22: Add EC53,EC54 for EMI 03.P20: Stuff C673/C675/C671/C672 for EMI 04.P15: Stuff ESD protector at R31/R32 for EMI 05.P10: GPIO 58 define to HDMI strap pin 06.P08: Add C606,C614,C619 for strong clock 07.P20:change C673,C675,C671,C672 for EMI 08.P19:change L48,L47,L35,L34 to CX08T601000 for EMI 09.P24:No stuff SW1,stuff D1 10.P24:Add D5 on S5_ON for ESD 11.P22:LED2 change single lens(blue) 12.P08:Del C623 13.P24:Del SW1 14.P13:Del R26,R27 and add RP5 for EMI 15.P15:Add EC38,EC40,EC43,EC46 for EMI 16.P28:change PR79 to 0 ohm and stuff PR77 and PC51 for EMI 17.P29:change PR76 to 0 ohm and stuff PR164,PC126 for EMI 18.P27:stuff PR69,PC43 for EMI 19.P17:change C617,C612,C539,C540 footprint form 1206 to 0805 20.P13:Swap USB nets between L50 and PR5 21.P13:Add R33,R34 for ESD 22.P15:change C354 to CH122GK1I10 for EMI 23.P22:change EC30,EC32,EC34,EC36,EC37,EC39,EC42,EC45,EC48,EC53 and stuff it for EMI 24.P26:Remove JP20,JP21,JP22,JP23 and change to short pad PR235,PR237 25.P27:Remove JP10,JP9,JP6,JP8 and change to short pad PR55,PR48,PR43,PR46,PR47,PR54,PR63,PR142,PR140 26.P28:Remove JP24,JP25 27.P29:Remove JP16,JP17 and change to short pad PR70,PR72 28.P30:Remove JP18,JP19 and change to short pad PR196,PR107 29.P22:No stuff HOLE9	4	1A	3A	
			5	1A	3A	
			6	1A	3A	
			7	1A	3A	
			8	1A	3A	
			9	1A	3A	
			10	1A	3A	
			11	1A	3A	
			12	1A	3A	
			13	1A	3A	
			14	1A	3A	
			15	1A	3A	
			16	1A	3A	
			17	1A	3A	
			18	1A	3A	
			19	1A	3A	
			20	1A	3A	
			21	1A	3A	
			22	1A	3A	
			23	1A	3A	
			24	1A	3A	
			25	1A	3A	
			26	1A	3A	
			27	1A	3A	
			28	1A	3A	
			29	1A	3A	
			30	1A	3A	
			31	1A	3A	
			32	1A	3A	
			33	1A	3A	
C	C	01.P15:change RJ45 connector without LED 02.P27:change PR140,PR142 to short pad 03.P30:change PR119,PR123,PR102 to short pad 04.P26:change PR217,PR218,PR221,PR229,PR236 to short pad 05.P29:change PR76 to short pad 06.P28:change PR79 to short pad 07.P14:change R234,R240,R230,R226,R233,R231,R224,R221 to CS16492FB13 08.P29:change PR75 from CS23652FB08 to CS24022FB13 for AMD request	34	1A	3A	
			35	1A	3A	
			36	1A	3A	
			37	1A	3A	
			38	1A	3A	
			39	1A	3A	
			40	1A	3A	
			41	1A	3A	