

8

7

6

5

4

3

2

1

1. ALL RESISTANCE VALUES ARE IN OHMS, 0.1 WATT +/- 5%.

2. ALL CAPACITANCE VALUES ARE IN MICROFARADS.

3. ALL CRYSTALS & OSCILLATOR VALUES ARE IN HERTZ.

SCHEM, HARP, Q41C

06/02/05

REV	ZONE	ECN	DESCRIPTION OF CHANGE	CK APPD DATE	ENG APPD DATE
02		38423	ENGINEERING RELEASE	06/02/05	06/02/05

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
815-7053	1	ALS DUST COVER	DC1	?

PAGE CONTENTS

1

TITLE PAGE AND CONTENTS

2

PCB NOTES

3

USB / SENSOR

4

POWER CONNECTOR

5

SIGNAL CONSTRAINTS

6

POWER CONSTRAINTS

7

COMPONENT LOCATIONS

8

SIGNAL LOCATIONS

PART#	QTY	DESCRIPTION	REFERENCE DESIGNATOR(S)	BOM OPTION
051-6852	1	SCHEM, HARP, Q41C	SCH1	
820-1825	1	PCBF, HARP, Q41C	PCB1	

DIMENSIONS ARE IN MILLIMETERS

XX ± _____

X.XX ± _____

X.XXX ± _____

ANGLES ± _____

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

METRIC

DRAFTER	✓	DESIGN CK	✓
ENG APPD	✓	MFG APPD	✓
QA APPD	✓	DESIGNER	✓
RELEASE	✓	SCALE	NONE
MATERIAL/FINISH NOTED AS APPLICABLE		SIZE	D

Apple Computer Inc.

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

TITLE

SCHEM, HARP, Q41C

DRAWING NUMBER

051-6852

REV: 02

SHT 1 OF 8

PCB SPECS

THICKNESS : 1.2 MM / 0.047 IN
1/2 OZ CU THICKNESS: 0.7 MILS
1.0 OZ CU THICKNESS: 1.4 MILS


IMPEDANCE : 50 OHMS +/- 10%
DIELECTRIC : FR-4
LAYER COUNT: 12
SIGNAL TRACE WIDTH: 4 MILS
SIGNAL TRACE SPACING: 4 MILS
PREPREG THICKNESS: 2-3 MILS

SEE PCB CAD FILES FOR MORE SPECIFIC INFO.

BOARD STACK-UP AND CONSTRUCTION

20R10 TH VIA OR VIA IN PAD		
1	SIGNAL (1/3 OZ + COPPER PLATING)	
2	PREPREG (3MIL)	GROUND (1/2 OZ)
3	LAMINATE (4MIL)	SIGNAL (1/2 OZ)
4	PREPREG (3MIL)	SIGNAL (1/2 OZ)
5	LAMINATE (4MIL)	GROUND (1/2 OZ)
6	PREPREG (2MIL)	CUT POWER PLANE(1 OZ)
7	LAMINATE (3MIL)	CUT POWER PLANE(1 OZ)
8	PREPREG (2MIL)	GROUND (1/2 OZ)
9	LAMINATE (4MIL)	SIGNAL (1/2 OZ)
10	PREPREG (3MIL)	SIGNAL (1/2 OZ)
11	LAMINATE (4MIL)	GROUND (1/2 OZ)
12	PREPREG (3MIL)	SIGNAL (1/3 OZ + COPPER PLATING)

BOARD HOLES



PCB BOARD STANDOFFS

BOARD INFORMATION

NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY
PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR
AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE COMPUTER INC.

SIZE	D	DRAWING NUMBER	051-6852	REV.	02
SCALE	NONE	SHT	2	OF	8

D

C

B


A

D

C


B

A

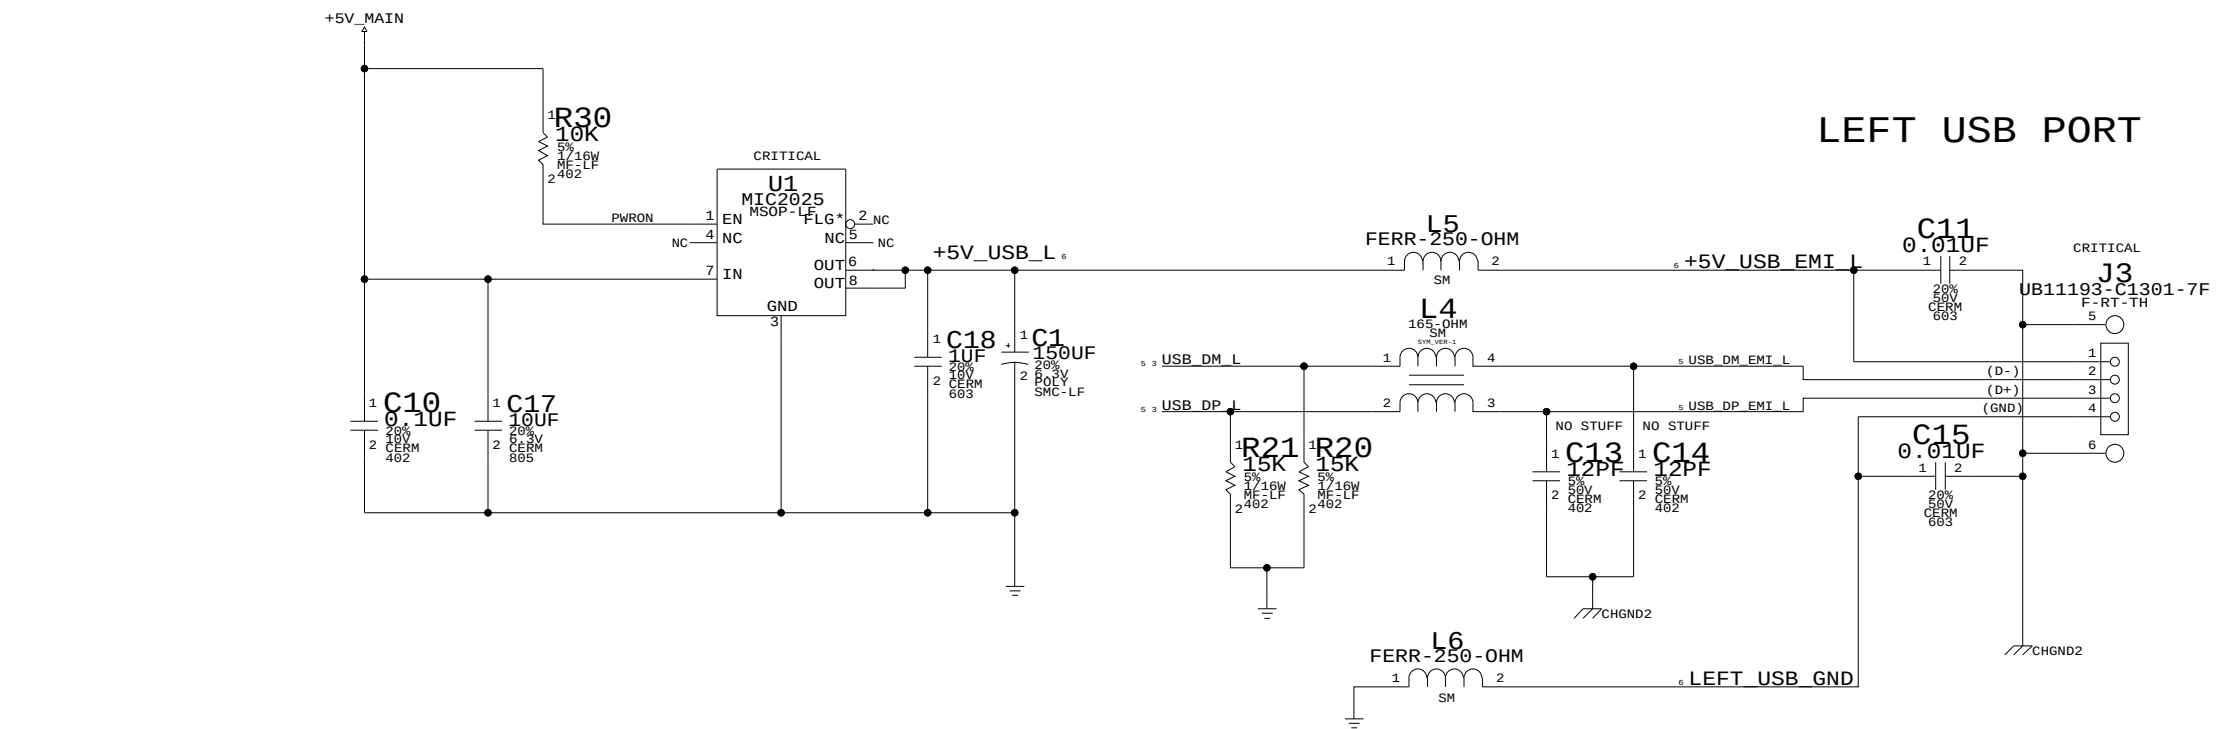

LEFT USB PORT

PUT L4, L5 AND L6 ACROSS THE MOAT

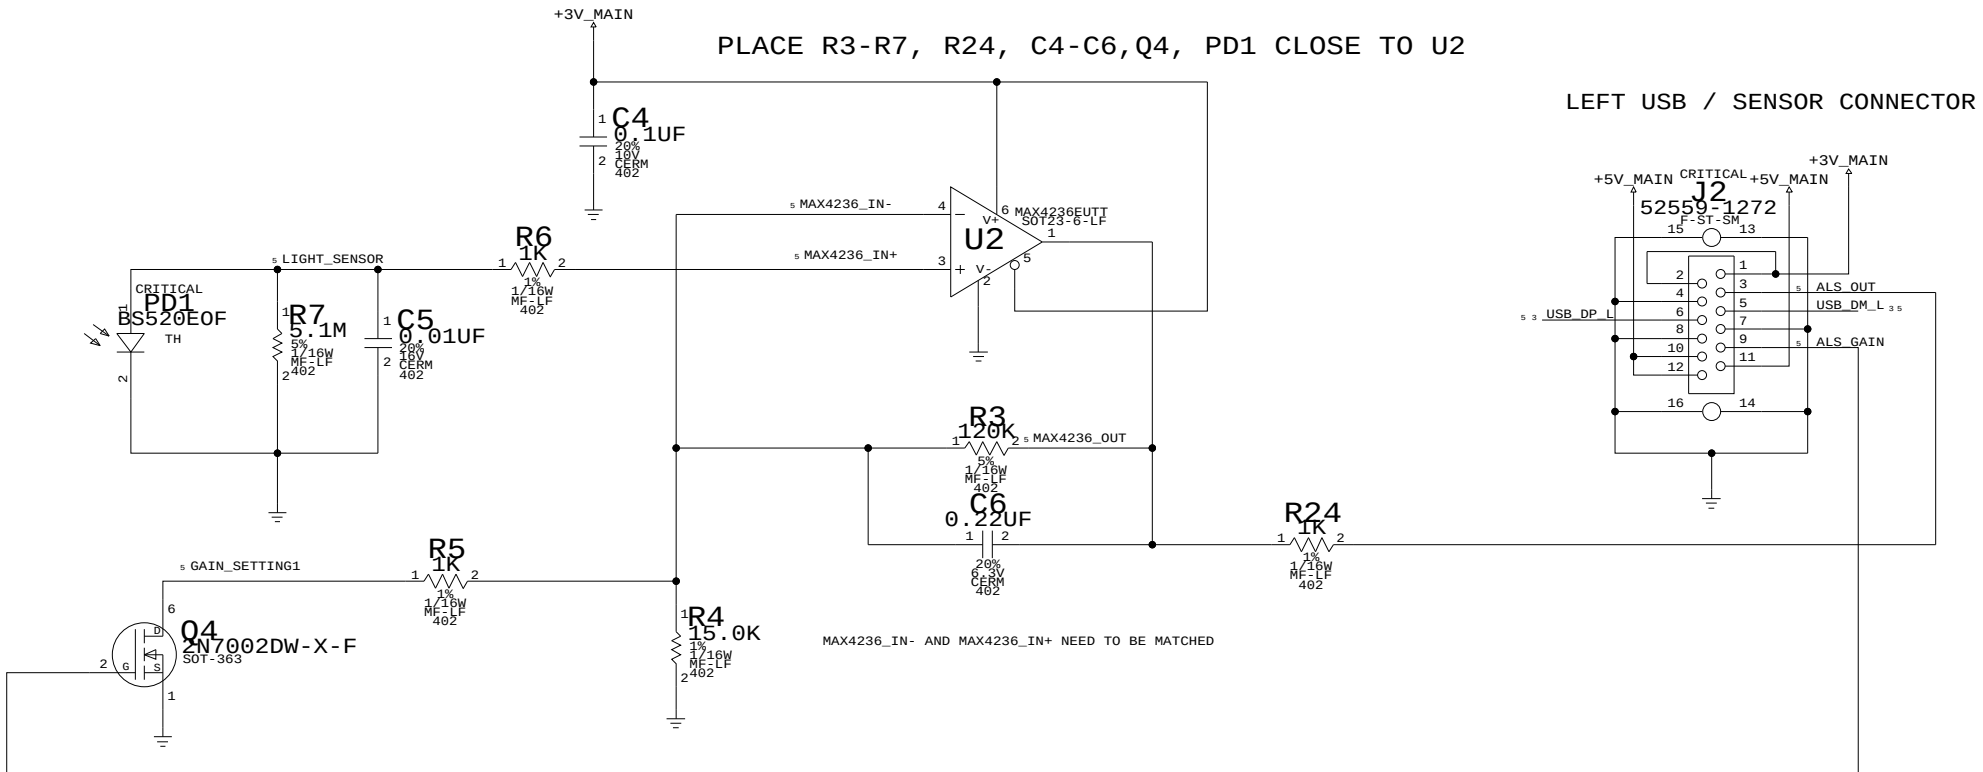

PLACE R3-R7, R24, C4-C6, Q4, PD1 CLOSE TO U2

LEFT USB / SENSOR CONNECTOR

USB & ALS

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE


II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.	SIZE	DRAWING NUMBER	REV.
	D	051-6852	02
SCALE	NONE	SHT	OF
		3	8


POWER CONNECTOR

CRITICAL
J4
87437-0843
M-ST-SM




DC POWER JACK

CRITICAL
J1
JPD1133-W01
F-RT-TH-LF

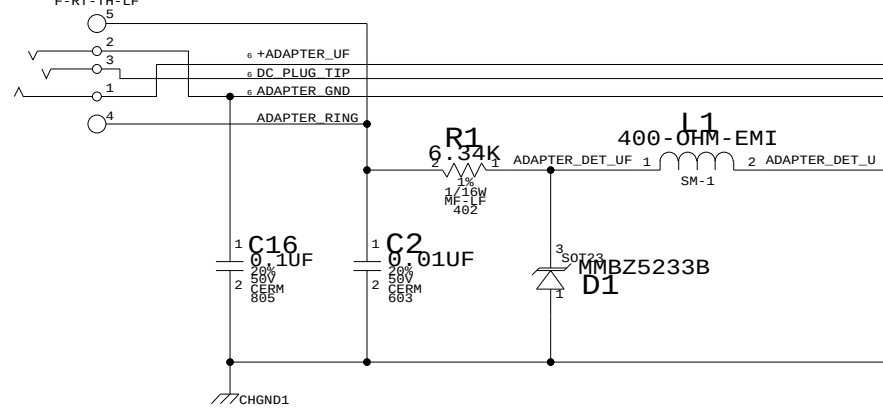

CHARGE LED SUPPORT

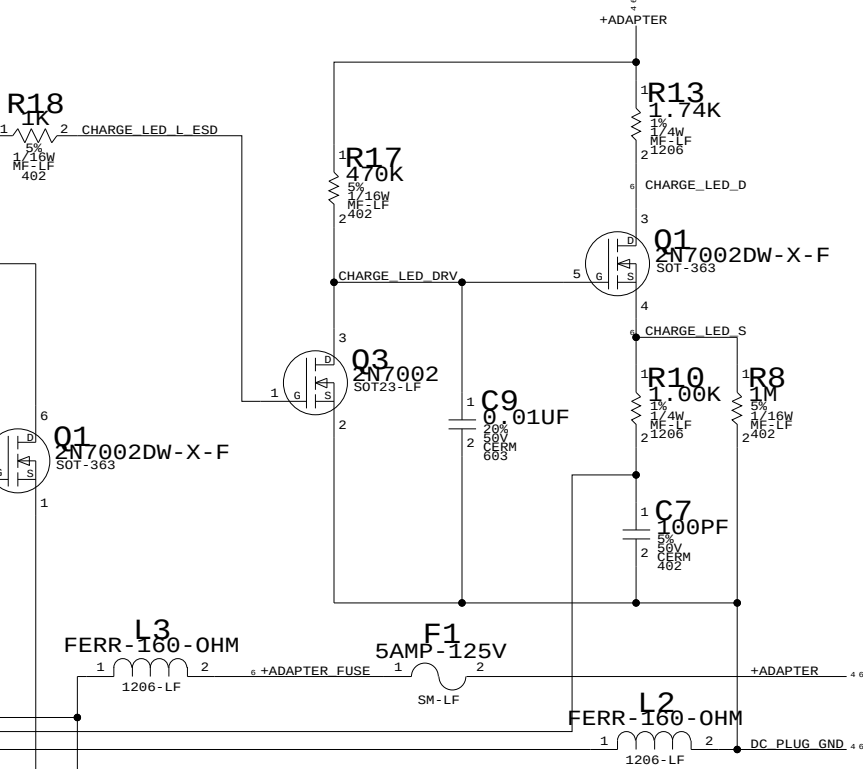


PLACE C2, C3 AND C16 CLOSE TO J1
PLACE L1, L2 AND L3 CLOSE TO J1

DC POWER INTERFACE

NOTICE OF PROPRIETARY PROPERTY
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING
I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE COMPUTER INC.	SIZE	DRAWING NUMBER		REV.
	D	051-6852		02
SCALE		SHT	OF	
NONE		4	8	

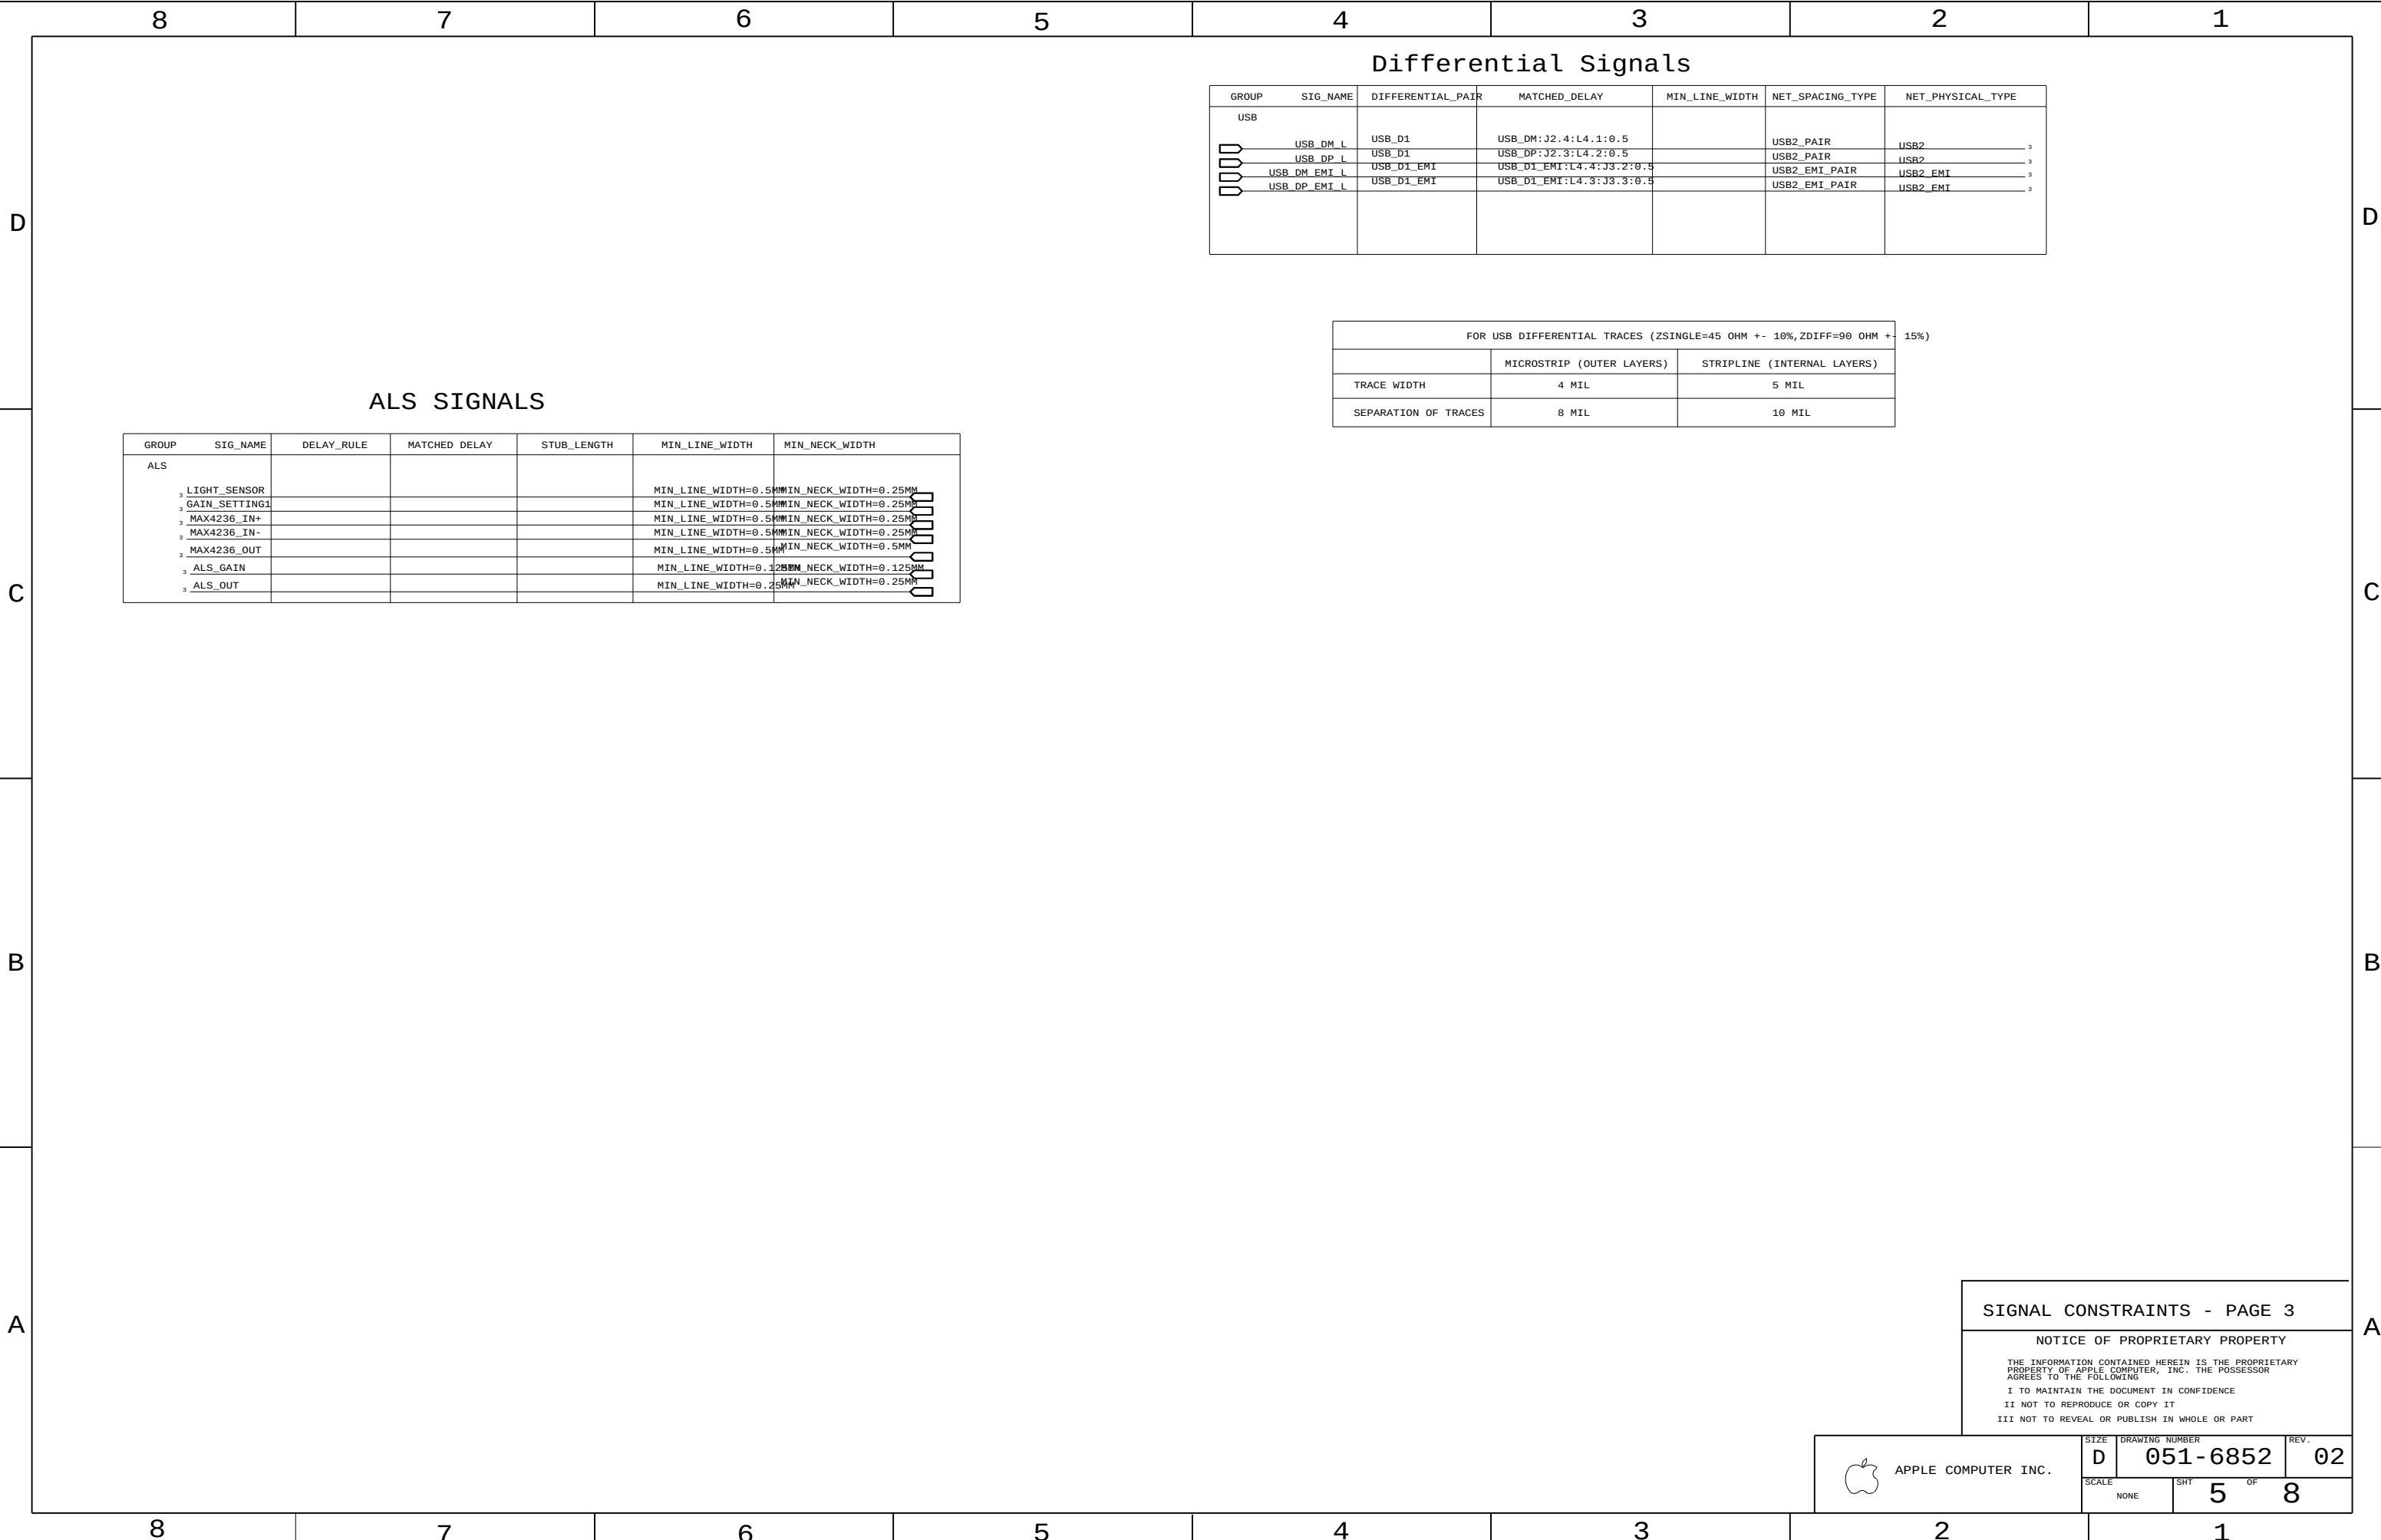

Differential Signals

GROUP	SIG_NAME	DIFFERENTIAL_PAIR	MATCHED_DELAY	MIN_LINE_WIDTH	NET_SPACING_TYPE	NET_PHYSICAL_TYPE
USB						
	USB_DM_L	USB_D1	USB_DM:J2.4:L4.1:0.5		USB2_PAIR	USB2
	USB_DP_L	USB_D1	USB_DP:J2.3:L4.2:0.5		USB2_PAIR	USB2
	USB_DM_EMI_L	USB_D1_EMI	USB_D1_EMI:L4.4:J3.2:0.5		USB2_EMI_PAIR	USB2_EMI
	USB_DP_EMI_L	USB_D1_EMI	USB_D1_EMI:L4.3:J3.3:0.5		USB2_EMI_PAIR	USB2_EMI

FOR USB DIFFERENTIAL TRACES (ZSINGLE=45 OHM +- 10%,ZDIFF=90 OHM +- 15%)		
	MICROSTRIP (OUTER LAYERS)	STRIPLINE (INTERNAL LAYERS)
TRACE WIDTH	4 MIL	5 MIL
SEPARATION OF TRACES	8 MIL	10 MIL

ALS SIGNALS

GROUP	SIG_NAME	DELAY_RULE	MATCHED_DELAY	STUB_LENGTH	MIN_LINE_WIDTH	MIN_NECK_WIDTH
ALS						
	LIGHT_SENSOR				MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	GAIN_SETTING1				MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	MAX4236_IN+				MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	MAX4236_IN-				MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	MAX4236_OUT				MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.5MM
	ALS_GAIN				MIN_LINE_WIDTH=0.125MM	MIN_NECK_WIDTH=0.125MM
	ALS_OUT				MIN_LINE_WIDTH=0.25MM	MIN_NECK_WIDTH=0.25MM

SIGNAL CONSTRAINTS - PAGE 3

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART




APPLE COMPUTER INC.

SIZE	DRAWING NUMBER		REV.
D	051-6852		02
SCALE	SHT	OF	
NONE	5	8	

POWER NET CONSTRAINTS

GROUP	SIG_NAME	VOLTAGE	MIN_LINE_WIDTH	MIN_NECK_WIDTH
ADAPTER	+5V_MAIN	VOLTAGE=5V	MIN_LINE_WIDTH=0.6MM	MIN_NECK_WIDTH=0.25MM
	+3V_MAIN	VOLTAGE=3.3V	MIN_LINE_WIDTH=0.6MM	MIN_NECK_WIDTH=0.25MM
	+ADAPTER_UF	VOLTAGE=24V	MIN_LINE_WIDTH=2.5MM	MIN_NECK_WIDTH=0.25MM
	+ADAPTER_FUSE	VOLTAGE=24V	MIN_LINE_WIDTH=2.5MM	MIN_NECK_WIDTH=0.25MM
	+ADAPTER	VOLTAGE=24V	MIN_LINE_WIDTH=2.5MM	MIN_NECK_WIDTH=0.25MM
	ADAPTER_GND	VOLTAGE=0V	MIN_LINE_WIDTH=2.5MM	MIN_NECK_WIDTH=0.25MM
	CHARGE_LED_D	VOLTAGE=	MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	CHARGE_LED_S	VOLTAGE=	MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	DC_PLUG_TIP	VOLTAGE=	MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
USB				
	+5V_USB_L	VOLTAGE=5V	MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	+5V_USB_EMI_L	VOLTAGE=5V	MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM
	LEFT_USB_GND	VOLTAGE=0V	MIN_LINE_WIDTH=0.5MM	MIN_NECK_WIDTH=0.25MM

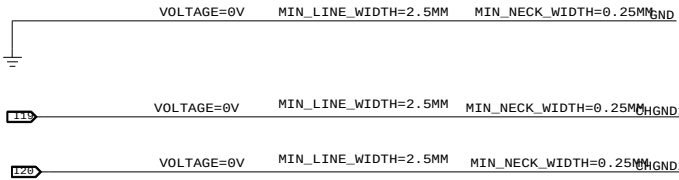

CHANGE HISTORY

- 1.IMPORTED 051-6474
- 2.CHANGED LM3526 TO MIC2025
- 3. ADDED ASL DUST COVER (815-7053) FOR THE BOM
- 4. SCHEMATIC RELEASED FOR PROTO
- 4. LEAD FREE PARTS. SCHEMATIC RELEASED FOR EVT.

SIGNAL CONSTRAINTS - PAGE 4

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART



APPLE COMPUTER INC.

SIZE	DRAWING NUMBER	REV.
D	051-6852	02
SCALE	SHT	OF
NONE	6	8

