

Compal Confidential

Model Name : QILE1 & QILE2
File Name : LA-8131P, LA-8132P
BOM P/N:

QILE1:
4319GG39L01 : SMT MB A8131 QILE1 DIS-N13P
4319GG39L02 : SMT MB A8131 QILE1 DIS GPU-N13M
4319GG39L03 : SMT MB A8131 QILE1 UMA

QILE2:
4319GJ39L01 : SMT MB A8133 QILE2 DIS-N13P
4319GJ39L02 : SMT MB A8133 QILE2 DIS GPU-N13M
4319GJ39L03 : SMT MB A8133 QILE2 UMA

Compal Confidential

M/B Schematics Document

Intel Ivy Bridge Processor with DDRIII + Panther Point PCH
GPU nVIDIA N13M-GE1 / N13P-GL

2011-12-20

REV:0.6

Security Classification		Compal Secret Data		Compal Electronics, Inc.		
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title		
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Cover Sheet		
				Size Custom	Document Number LA-8131P	Rev 0.6
				Date: Friday, January 08, 2012		Sheet 1 of 58

Voltage Rails

power plane	State	+B	+5VALW	+3VALW	+1.5V	+5VS +3VS +1.5VS +VCCP +CPU_CORE +VGA_CORE +VCC_GFXCORE_AXG +1.8VS +0.75VS +1.05VS	+3VM +1.05VM
S0		○	○	○	○	○	○ M3 Supported
S3		○	○	○	○	✗	○ M3 Supported
S5 S4/AC		○	○	✗	✗	✗	○ M3 Supported
S5 S4/ Battery only		✗	✗	✗	✗	✗	
S5 S4/AC & Battery don't exist		✗	✗	✗	✗	✗	

STATE	SIGNAL	SLP_S1#	SLP_S3#	SLP_S4#	SLP_S5#	+VALW	+V	+VS	Clock
Full ON		HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON
S3 (Suspend to RAM)		LOW	LOW	HIGH	HIGH	ON	ON	OFF	OFF
S4 (Suspend to Disk)		LOW	LOW	LOW	HIGH	ON	OFF	OFF	OFF
S5 (Soft OFF)		LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF

BOARD ID Table

Board ID	PCB Revision
0	0.1
1	0.2
2	0.3
3	0.4
4	0.5
5	0.6
6	
7	

EC SM Bus1 address

Device	Address
Smart Battery	0001 011X b

EC SM Bus2 address

Device	Address
Thermal Sensor Fintek F75303M	1001 101xb

PCH SM Bus address

Device	Address
DDR DIMM0	1001 000Xb
DDR DIMM2	1001 010Xb

USB Port Table

	USB 2.0	Port	3 External USB Port
EHCI1 USB3.0	UHCI0	0	
		1	USB 3.0 Port (Left Side)
	UHCI1	2	USB 3.0 Port (Left Side)
		3	USB 3.0 Port (Left Side)
	UHCI2	4	
		5	Camera
	UHCI3	6	
EHCI2		7	
	UHCI4	8	
		9	USB Port (Right Side)
	UHCI5	10	Mini Card(WLAN/BT)
		11	EPR
	UHCI6	12	Mini Card(WWAN)
		13	Blue Tooth


BOM Structure Table

BTO Item	BOM Structure
Connector	CONN@
45 LEVEL	45@
Unpop	@
nVidia	DIS@
INTEL DD3 M3	M3@
SIM Card Slot	3G@
Intel UMA	UMA@
VRAM Option	X76@
Intel SBA	SBA@
Intel AOAC	AOAC@
TPM	TPM@
GPU N13M	N13M@
GPU N13P	N13MP

SMBUS Control Table

	SOURCE	VGA	BATT	KE9012	SODIMM	WLAN WWAN	Thermal Sensor	PCH
SMB_EC_CK1	KB9012	✗	✓	✗	✗	✗	✗	✗
SMB_EC_DA1	+3VALW		+3VALW					
SMB_EC_CK2	KB9012	✗	✗	✗	✗	✗	✗	✓
SMB_EC_DA2	+3VALW							+3VS
SMBCLK	PCH	✗	✗	✗	✓	✓	✗	✗
SMBDATA	+3VALW				+3VS	+3VS		
SMLOCLK	PCH	✗	✗	✗	✗	✗	✗	✗
SML0DATA	+3VALW							
SML1CLK	PCH	✓	✗	✓	✗	✗	✓	✗
SML1DATA	+3VALW	+3VS		+3VS			+3VS	

Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	Notes List
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size Custom	Document Number
				Date	Friday, January 08, 2012
				Sheet	3 of 58
				Rev	0.6

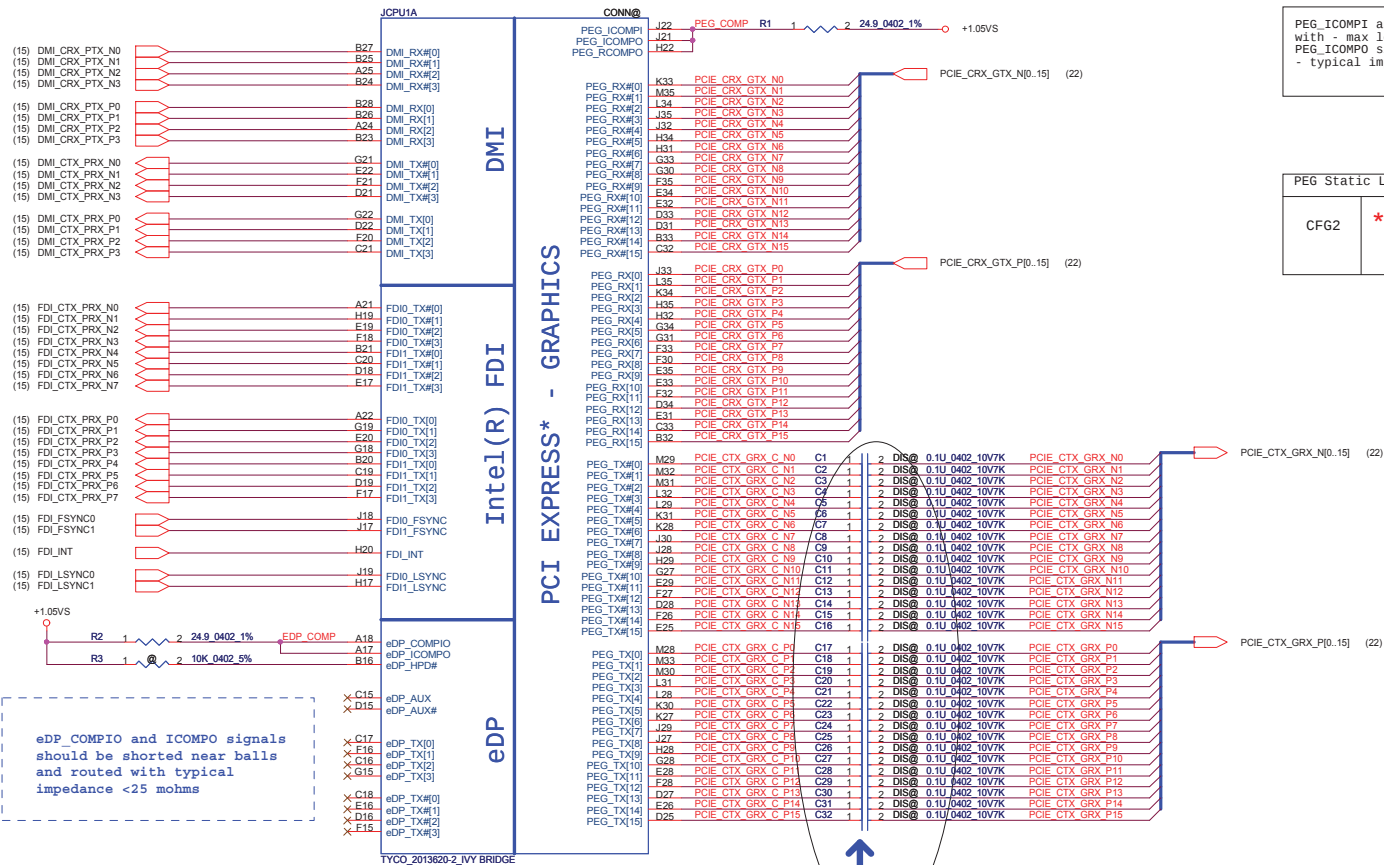




PEG_ICOMPI and RCOMPO signals should be shorted and routed with - max length = 500 mils - typical impedance = 43 mohms
PEG_ICOMPO signals should be routed with - max length = 500 mils - typical impedance = 14.5 mohms

PEG Static Lane Reversal - CFG2 is for the 16x


CFG2	1: Normal Operation; Lane # definition matches socket pin map definition
	0: Lane Reversed

eDP COMPIO and ICOMPO signals should be shorted near balls and routed with typical impedance <25 mohms


Nvidia support PCIe Gen2

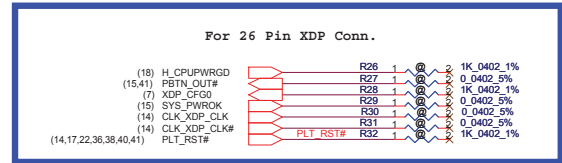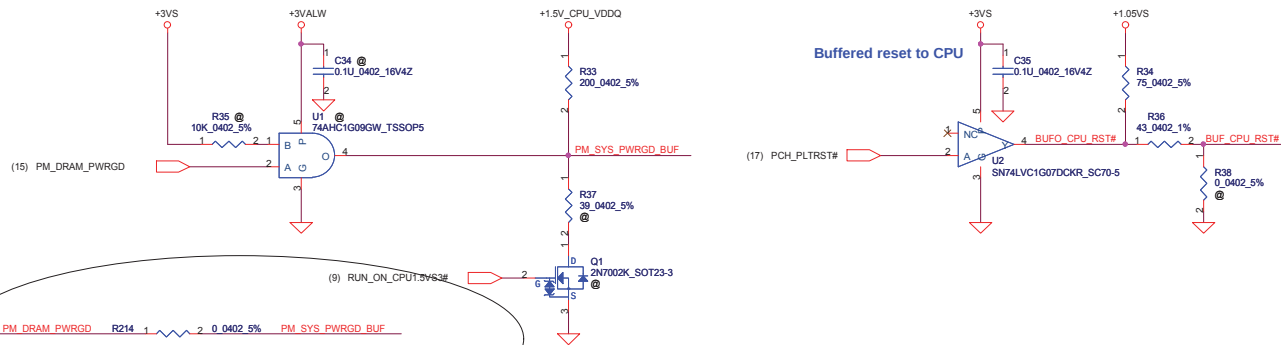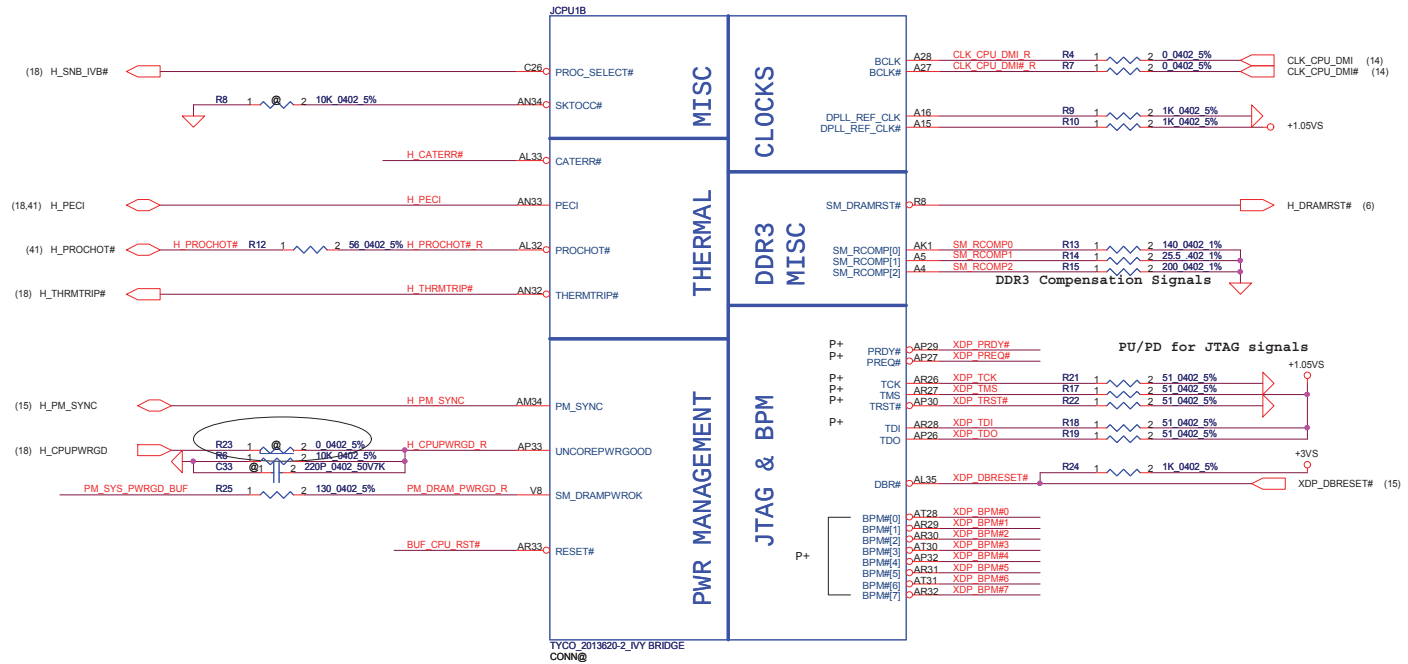

Security Classification		Compal Secret Data		Title	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Size	Document Number
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Custom	LA-8131P
				Date:	Friday, January 08, 2012
				Sheet	5 of 58

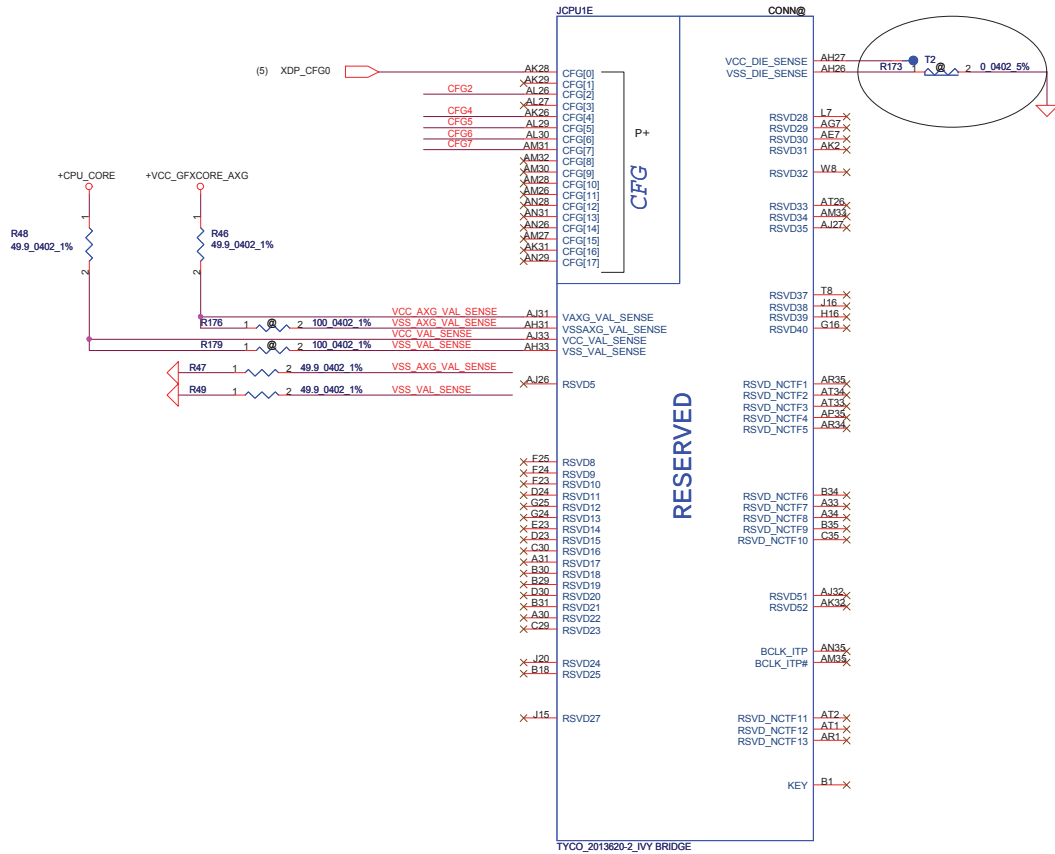


CFG Straps for Processor




PEG Static Lane Reversal - CFG2 is for the 16x

CFG2	★ 1: Normal Operation; Lane # definition matches socket pin map definition 0: Lane Reversed
------	---




Display Port Presence Strap

CFG4	★ 1 : Disabled; No Physical Display Port attached to Embedded Display Port 0 : Enabled; An external Display Port device is connected to the Embedded Display Port
------	---




PCIe Port Bifurcation Straps

CFG[6:5]	★ 11: (Default) x16 - Device 1 functions 1 and 2 disabled 10: x8, x8 - Device 1 function 1 enabled ; function 2 disabled 01: Reserved - (Device 1 function 1 disabled ; function 2 enabled) 00: x8,x4,x4 - Device 1 functions 1 and 2 enabled
----------	---



PEG DEFER TRAINING




CFG7	1: (Default) PEG Train immediately following xxRESETB de assertion 0: PEG Wait for BIOS for training
------	--


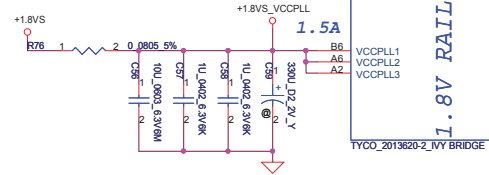




- Can connect to GND if motherboard only supports external graphics and if GFX VR is not stuffed in a common motherboard design,
- VAXG can be left floating in a common motherboard design (Gfx VR keeps VAXG from floating) if the VR is stuffed


IVY Bridge drives VCCIO_SEL low
VCCP_PWRCTRL:0




Sandy Bridge is NC for A19
VCCP_PWRCTRL:1

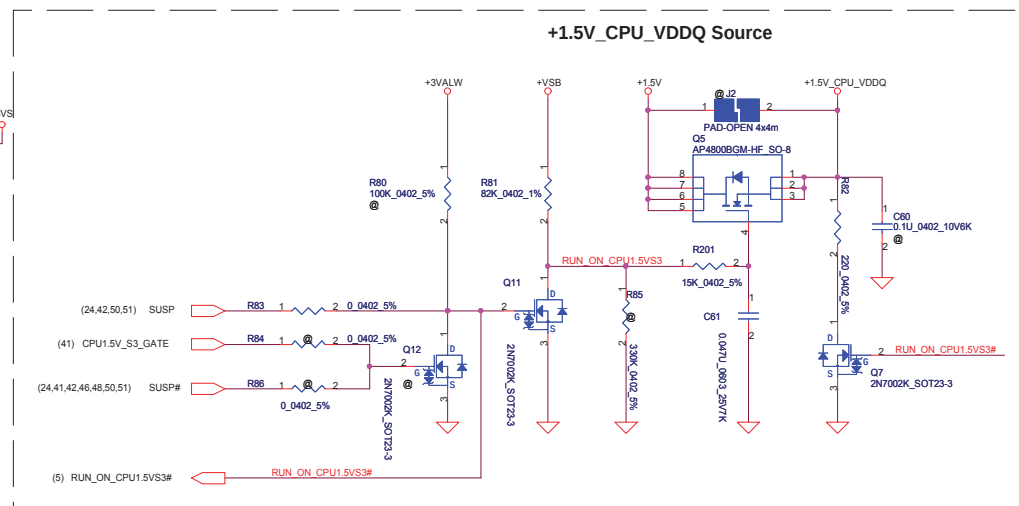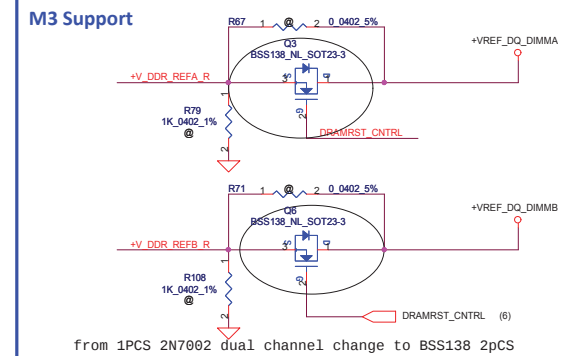

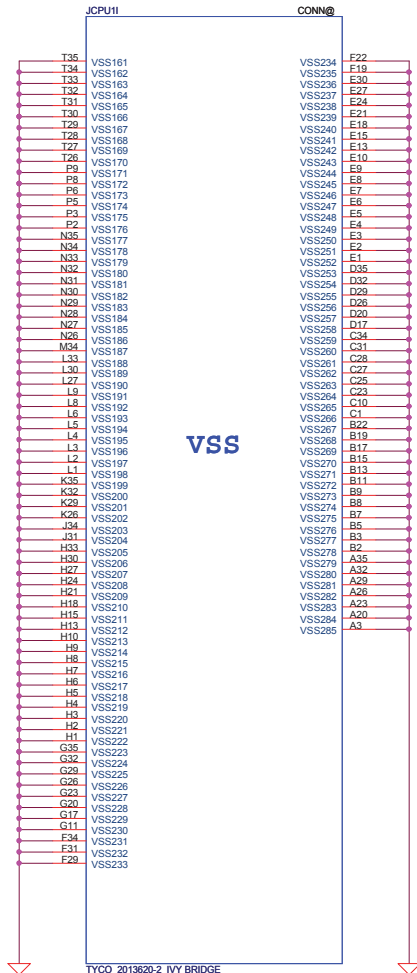
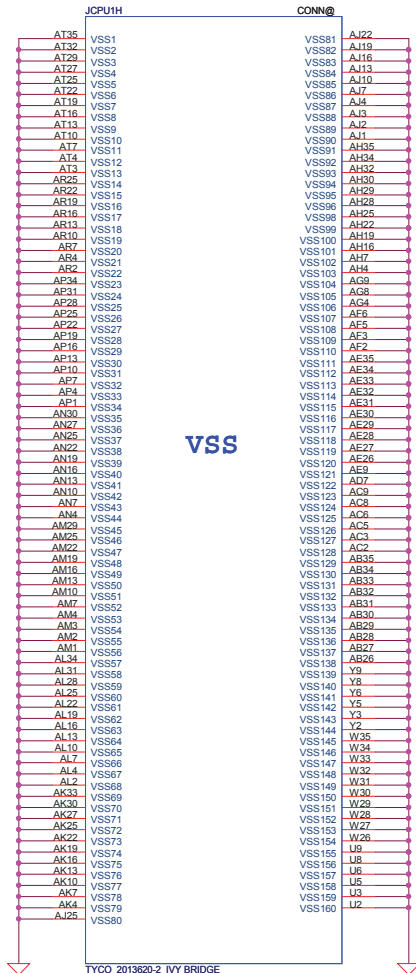


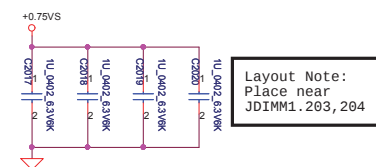





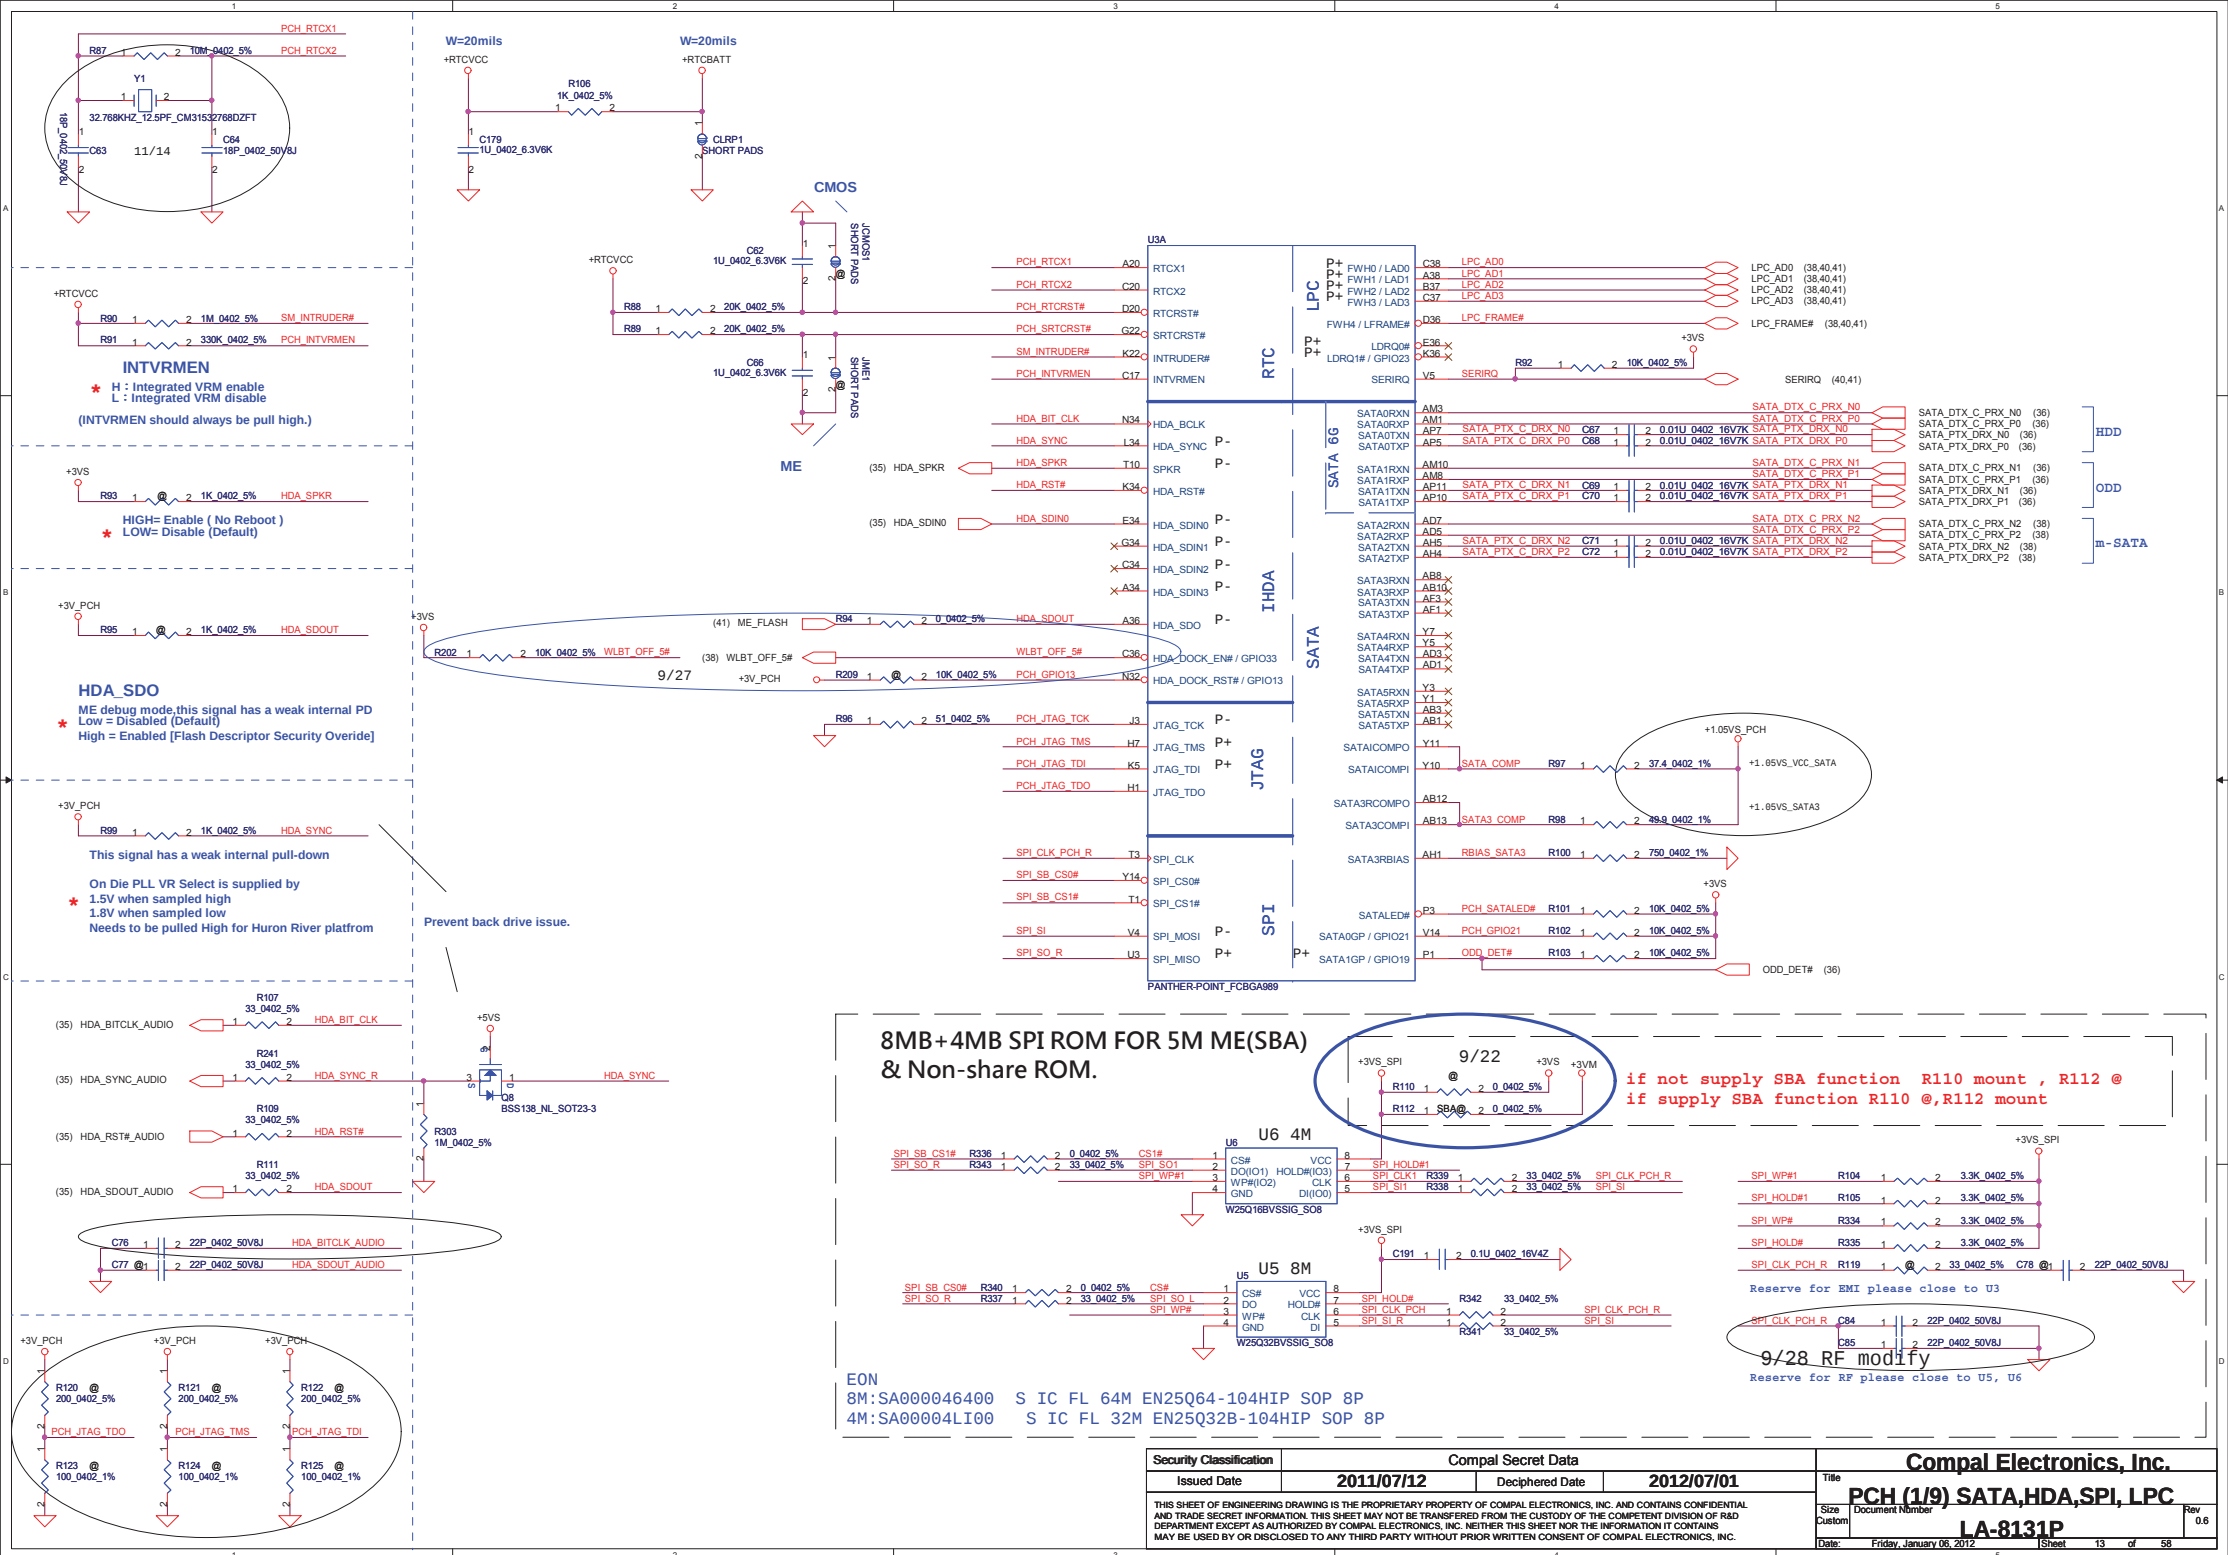


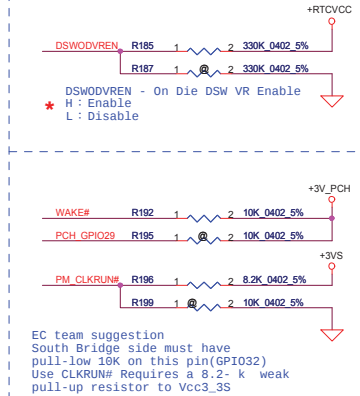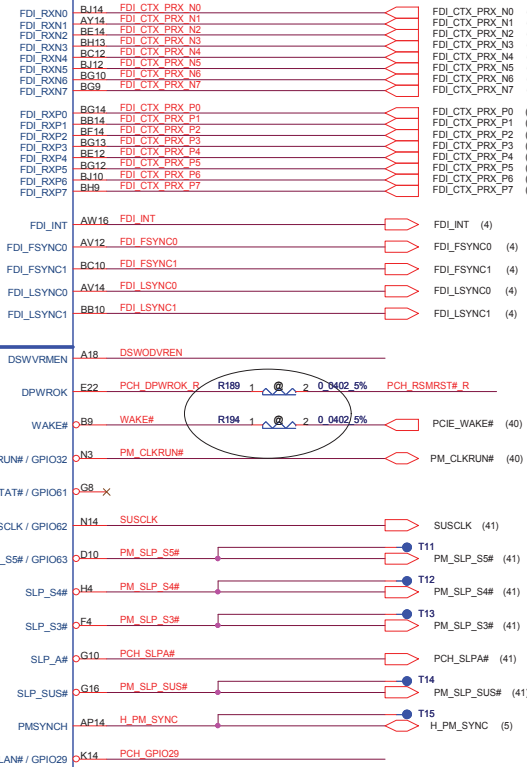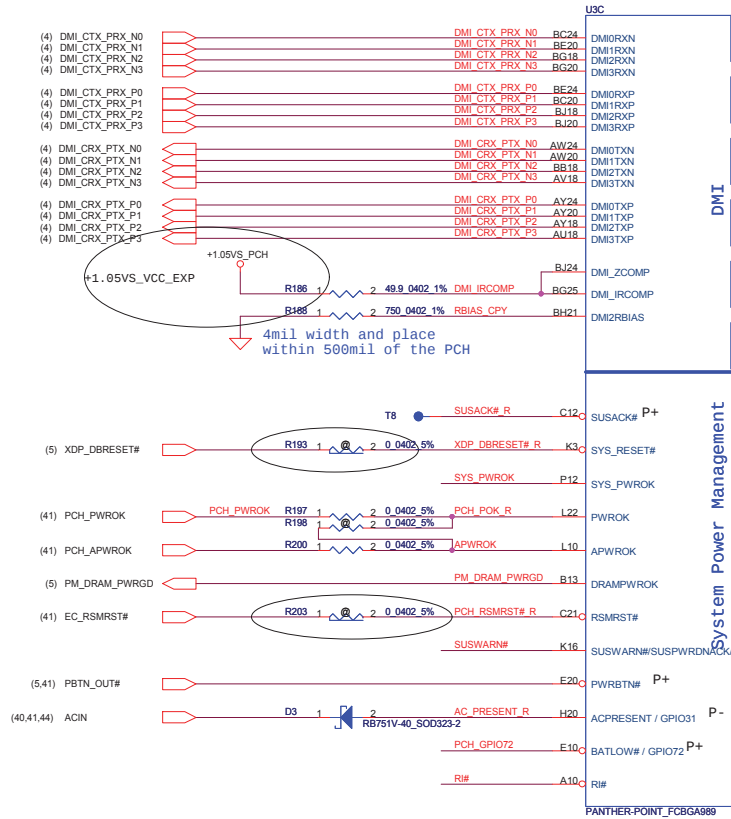

Can be left NC when
IAMT is not support on
the platform

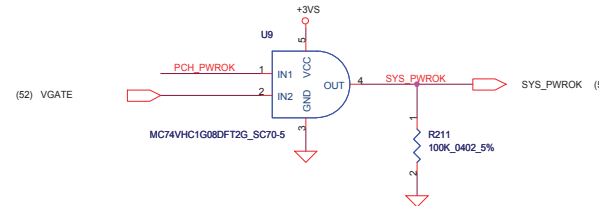




Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	PCH (3/8) DMI,FDI,PM,
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size Custom	Document Number LA-8131P
				Date: Friday, January 08, 2012	Sheet 15 of 58

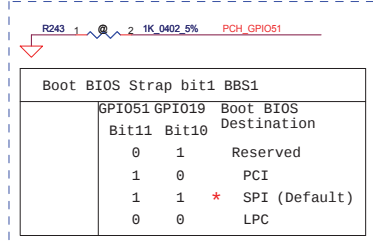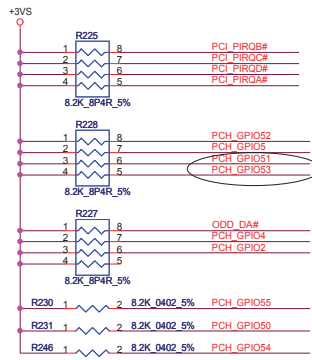

- (37) USB3_RX1_N
- (37) USB3_RX2_N
- (37) USB3_RX3_N
- (37) USB3_RX1_P
- (37) USB3_RX2_P
- (37) USB3_RX3_P
- (37) USB3_TX1_N
- (37) USB3_TX2_N
- (37) USB3_TX3_N
- (37) USB3_TX1_P
- (37) USB3_TX2_P
- (37) USB3_TX3_P





- (22) DGPU_HOLD_RST#
- (51) VDD_PWR_EN
- (22,44) DGPU_PWR_EN
- (38) ST_DET#
- (38) ODD_DA#
- (41) PCI_PME#
- (5) PCH_PLTRST#
- (14) CLK_PCI_LPBACK
- (41) CLK_PCI_EC
- (38,40) CLK_PCI_DB
- (40) CLK_PCI_TPM

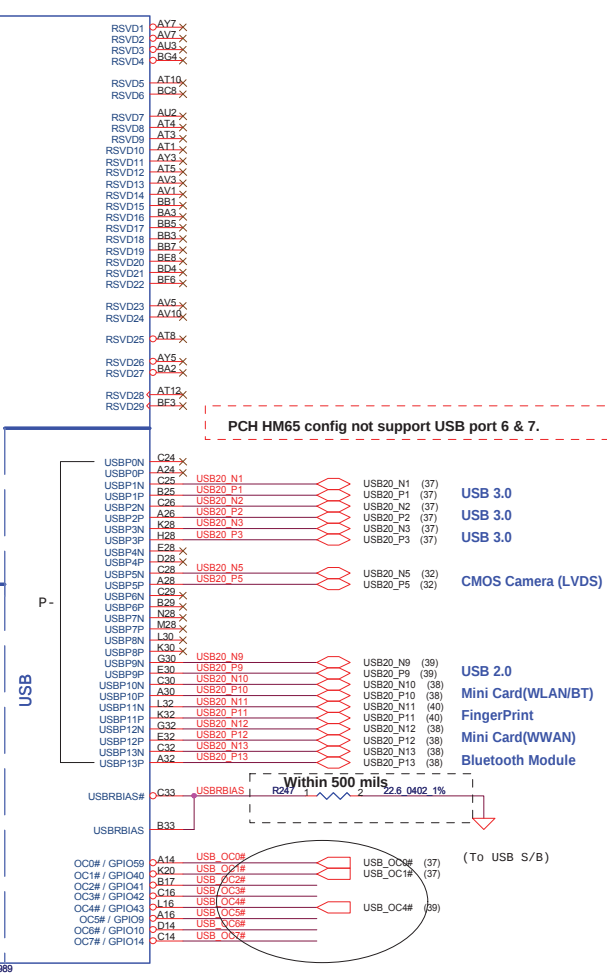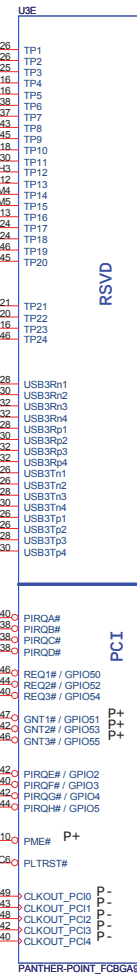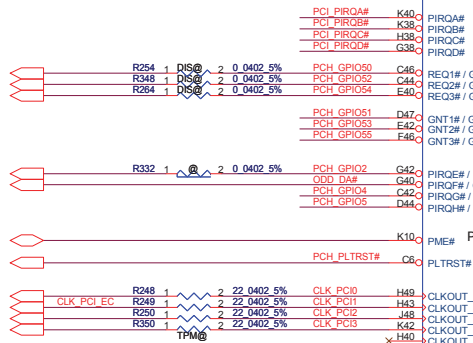



PCH HM65 config not support USB port 6 & 7.


- USB 3.0
- USB 3.0
- USB 3.0
- CMOS Camera (LVDS)
- USB 2.0
- Mini Card(WLAN/BT)
- FingerPrint
- Mini Card(WWAN)
- Bluetooth Module

OC[0..3] use for EHCI 1
OC[4..7] use for EHCI 2

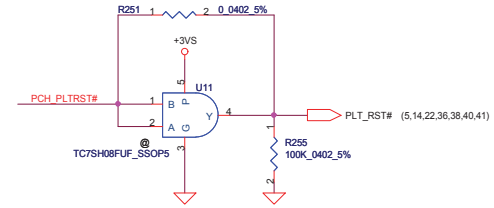

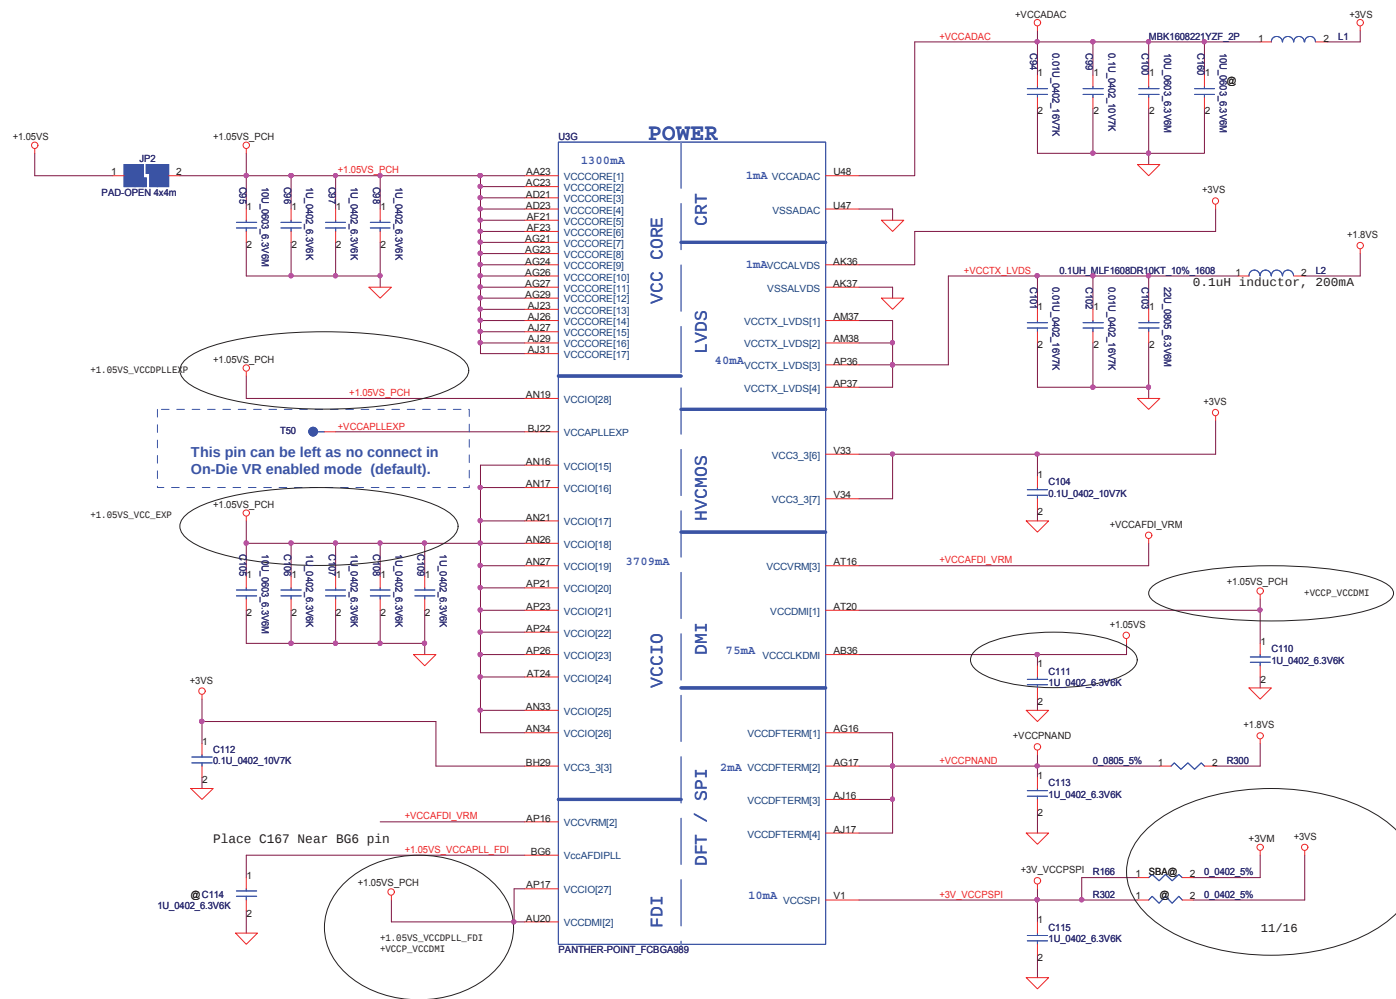




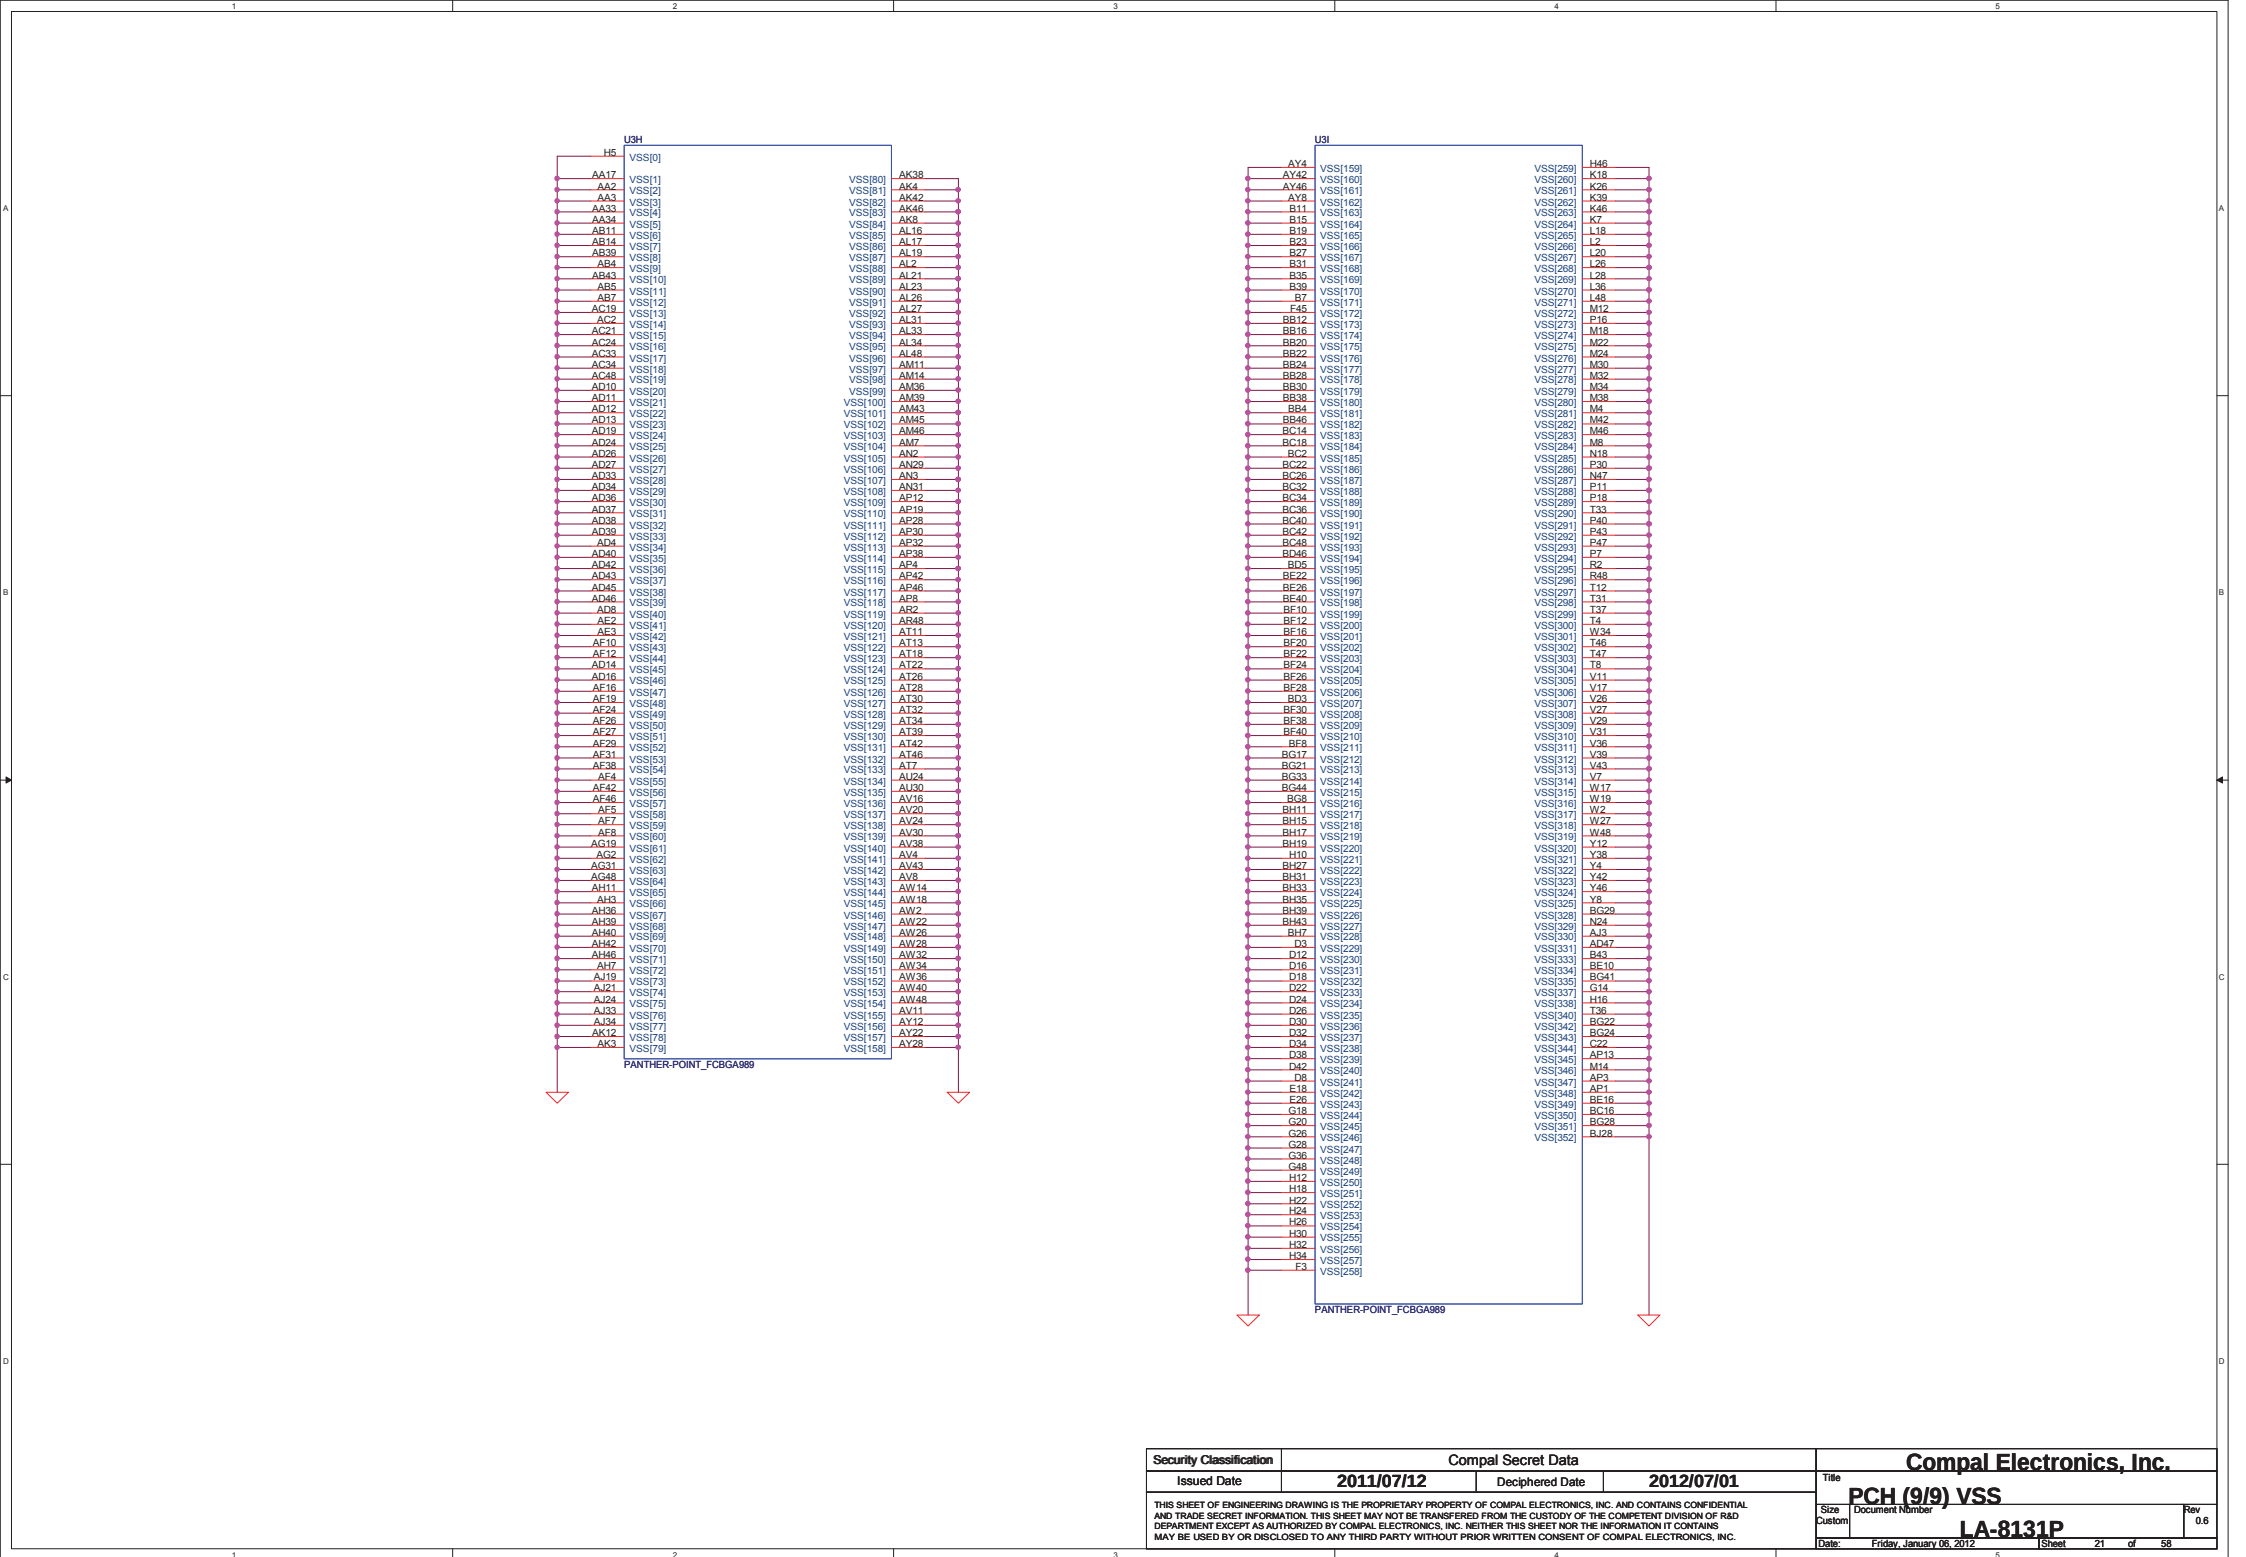

- (4) PCIE_CTX_GRX_N0_15] PCIE_CTX_GRX_N0_15]
- (4) PCIE_CTX_GRX_P0_15] PCIE_CTX_GRX_P0_15]
- (4) PCIE_CRX_GTX_N0_15] PCIE_CRX_GTX_N0_15]
- (4) PCIE_CRX_GTX_P0_15] PCIE_CRX_GTX_P0_15]

DIS@			
PCIE_CRX_GTX_P0	C1401	DIS@	1
PCIE_CRX_GTX_N0	C1402	DIS@	1
PCIE_CRX_GTX_P1	C1403	DIS@	1
PCIE_CRX_GTX_N1	C1404	DIS@	1
PCIE_CRX_GTX_P2	C1405	DIS@	1
PCIE_CRX_GTX_N2	C1406	DIS@	1
PCIE_CRX_GTX_P3	C1407	DIS@	1
PCIE_CRX_GTX_N3	C1408	DIS@	1
PCIE_CRX_GTX_P4	C1409	DIS@	1
PCIE_CRX_GTX_N4	C1410	DIS@	1
PCIE_CRX_GTX_P5	C1411	DIS@	1
PCIE_CRX_GTX_N5	C1412	DIS@	1
PCIE_CRX_GTX_P6	C1413	DIS@	1
PCIE_CRX_GTX_N6	C1414	DIS@	1
PCIE_CRX_GTX_P7	C1415	DIS@	1
PCIE_CRX_GTX_N7	C1416	DIS@	1
PCIE_CRX_GTX_P8	C1417	DIS@	1
PCIE_CRX_GTX_N8	C1418	DIS@	1
PCIE_CRX_GTX_P9	C1419	DIS@	1
PCIE_CRX_GTX_N9	C1420	DIS@	1
PCIE_CRX_GTX_P10	C1421	DIS@	1
PCIE_CRX_GTX_N10	C1422	DIS@	1
PCIE_CRX_GTX_P11	C1423	DIS@	1
PCIE_CRX_GTX_N11	C1424	DIS@	1
PCIE_CRX_GTX_P12	C1425	DIS@	1
PCIE_CRX_GTX_N12	C1426	DIS@	1
PCIE_CRX_GTX_P13	C1427	DIS@	1
PCIE_CRX_GTX_N13	C1428	DIS@	1
PCIE_CRX_GTX_P14	C1429	DIS@	1
PCIE_CRX_GTX_N14	C1430	DIS@	1
PCIE_CRX_GTX_P15	C1431	DIS@	1
PCIE_CRX_GTX_N15	C1432	DIS@	1
PCIE_CRX_GTX_P16	C1433	DIS@	1
PCIE_CRX_GTX_N16	C1434	DIS@	1

Differential signal



Part 1 of 7			
PCIE_CTX_GRX_P0	AN12	PEX_RX0	
PCIE_CTX_GRX_N0	AN12	PEX_RX0_N	
PCIE_CTX_GRX_P1	AN14	PEX_RX1	
PCIE_CTX_GRX_N1	AN14	PEX_RX1_N	
PCIE_CTX_GRX_P2	AP15	PEX_RX2	
PCIE_CTX_GRX_N2	AP15	PEX_RX2_N	
PCIE_CTX_GRX_P3	AN15	PEX_RX3	
PCIE_CTX_GRX_N3	AN15	PEX_RX3_N	
PCIE_CTX_GRX_P4	AN17	PEX_RX4	
PCIE_CTX_GRX_N4	AN17	PEX_RX4_N	
PCIE_CTX_GRX_P5	AP17	PEX_RX5	
PCIE_CTX_GRX_N5	AP17	PEX_RX5_N	
PCIE_CTX_GRX_P6	AP18	PEX_RX6	
PCIE_CTX_GRX_N6	AP18	PEX_RX6_N	
PCIE_CTX_GRX_P7	AN20	PEX_RX7	
PCIE_CTX_GRX_N7	AN20	PEX_RX7_N	
PCIE_CTX_GRX_P8	AP20	PEX_RX8	
PCIE_CTX_GRX_N8	AP20	PEX_RX8_N	
PCIE_CTX_GRX_P9	AN21	PEX_RX9	
PCIE_CTX_GRX_N9	AN21	PEX_RX9_N	
PCIE_CTX_GRX_P10	AN23	PEX_RX10	
PCIE_CTX_GRX_N10	AN23	PEX_RX10_N	
PCIE_CTX_GRX_P11	AP23	PEX_RX11	
PCIE_CTX_GRX_N11	AP23	PEX_RX11_N	
PCIE_CTX_GRX_P12	AN24	PEX_RX12	
PCIE_CTX_GRX_N12	AN24	PEX_RX12_N	
PCIE_CTX_GRX_P13	AN26	PEX_RX13	
PCIE_CTX_GRX_N13	AN26	PEX_RX13_N	
PCIE_CTX_GRX_P14	AP26	PEX_RX14	
PCIE_CTX_GRX_N14	AP26	PEX_RX14_N	
PCIE_CTX_GRX_P15	AN27	PEX_RX15	
PCIE_CTX_GRX_N15	AN27	PEX_RX15_N	

U1401A

Part 1 of 7

GPIO

DACS

PCI EXPRESS

I2C

CLK

Internal Thermal Sensor

60mA

45mA

45mA

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT

XTAL_OUTBUFF

XTAL_SIN

PLLVD

SP_PLLVD

VID_PLLVD

XTAL_IN

XTAL_OUT


XTAL_OUTBUFF

XTAL_SIN



PLLVD

SP_PLLVD

VID_PLLVD

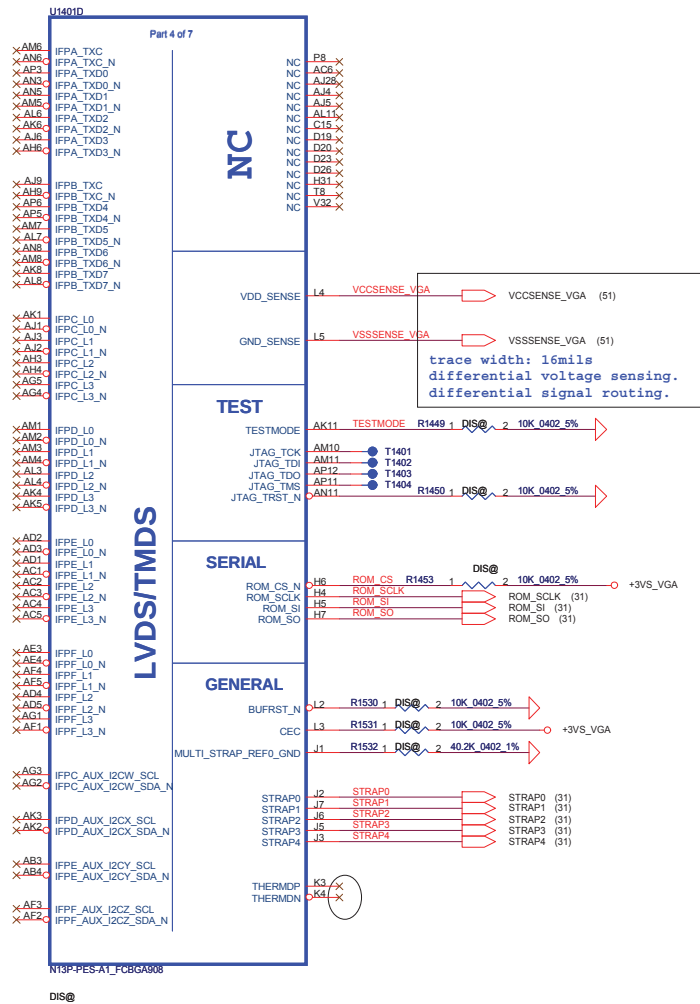


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	N13X-LVDS/HDMI/DP/THM
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size Custom	Rev 0.6
Date:	Friday, January 08, 2012	Sheet	23	of	58

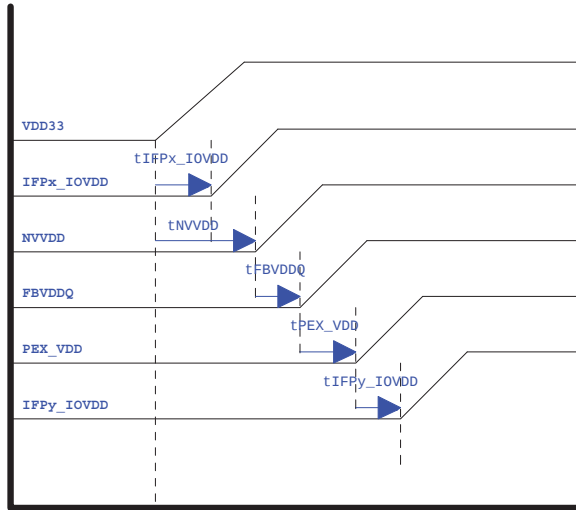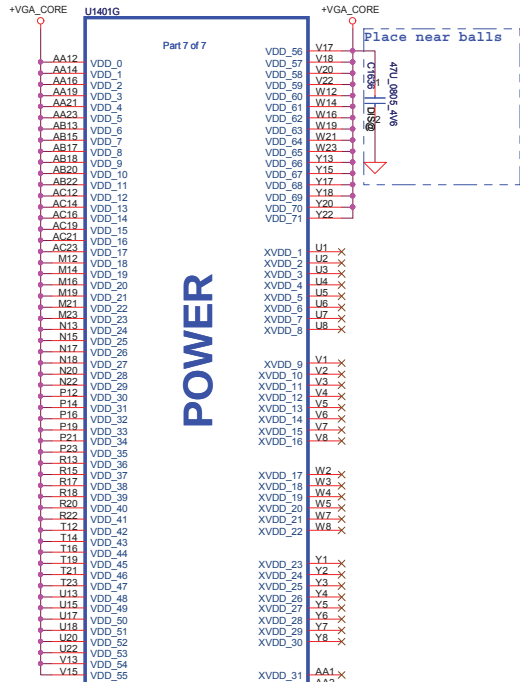

NV Recommended Power On Sequencing Order

X=A and B
Y=C, D, E and F

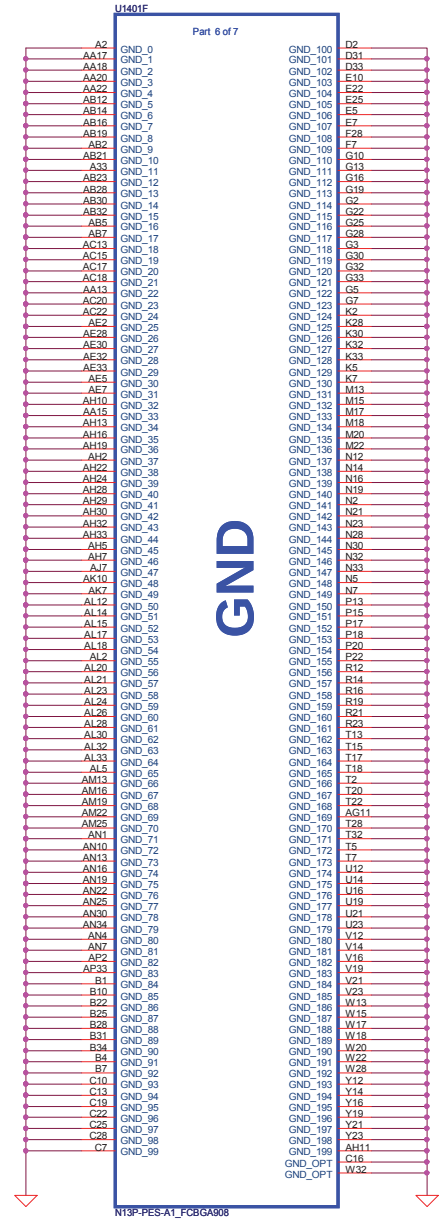


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	N13X-VGA CORE, GND
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Custom
				Document Number	LA-8131P
				Date	Friday, January 08, 2012
				Sheet	25 of 58
				Rev	0.6

(27.28) FBA_D[0..63] FBA_D[0..63]
(27.28) FBA_DQM[7..0]
(27.28) FBA_DQS[7..0] FBA_MA[15..0] (27.28)
(27.28) FBA_DQS[7..0] FBA_BA[2..0] (27.28)




(29.30) FBC_D[0..63] FBC_D[0..63]
(29.30) FBC_DQM[7..0]
(29.30) FBC_DQS[7..0] FBC_MA[15..0] (29.30)
(29.30) FBC_DQS[7..0] FBC_BA[2..0] (29.30)

Mode D - Mirror Mode Mapping

	DATA Bus	
Address	0..31	32..63
FBx_CMD0	CS0#_L	
FBx_CMD1		
FBx_CMD2	ODT_L	
FBx_CMD3	CKE_L	
FBx_CMD4	A14	A14
FBx_CMD5	RST	RST
FBx_CMD6	A9	A9
FBx_CMD7	A7	A7
FBx_CMD8	A2	A2
FBx_CMD9	A0	A0
FBx_CMD10	A4	A4
FBx_CMD11	A1	A1
FBx_CMD12	BA0	BA0
FBx_CMD13	WE#	WE#
FBx_CMD14	A15	A15
FBx_CMD15	CAS#	CAS#
FBx_CMD16	CS0#_H	
FBx_CMD17		
FBx_CMD18	ODT_H	
FBx_CMD19	CKE_H	
FBx_CMD20	A13	A13
FBx_CMD21	A8	A8
FBx_CMD22	A6	A6
FBx_CMD23	A11	A11
FBx_CMD24	A5	A5
FBx_CMD25	A3	A3
FBx_CMD26	BA2	BA2
FBx_CMD27	BA1	BA1
FBx_CMD28	A12	A12
FBx_CMD29	A10	A10
FBx_CMD30	RAS#	RAS#


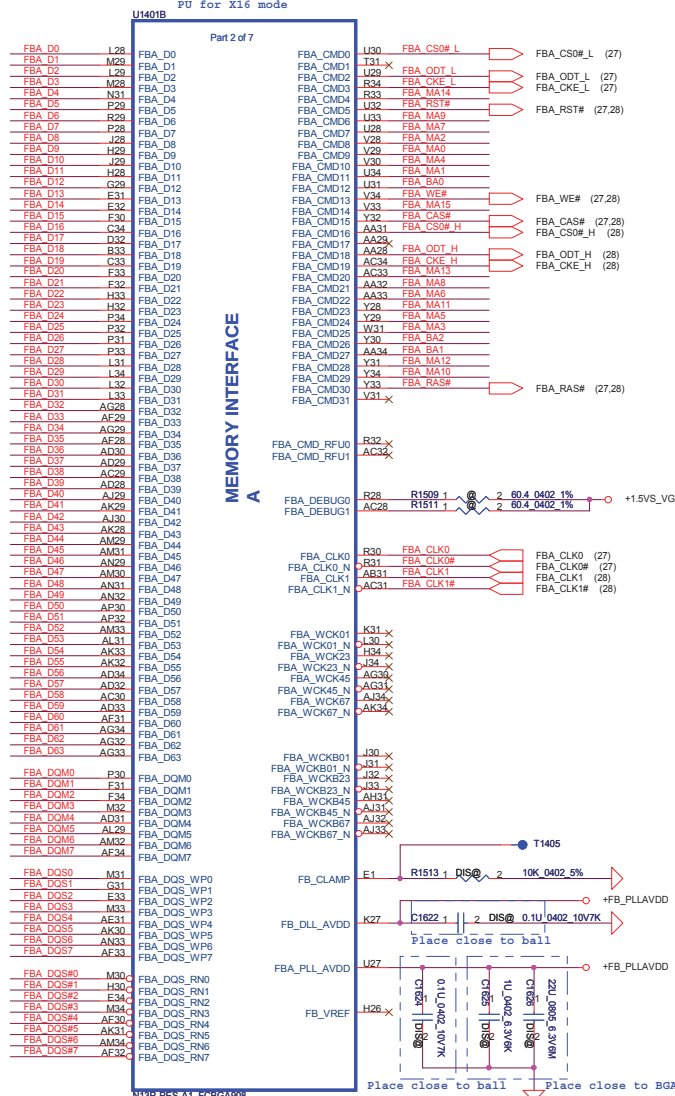


Memory Partition A - Lower 32 bits



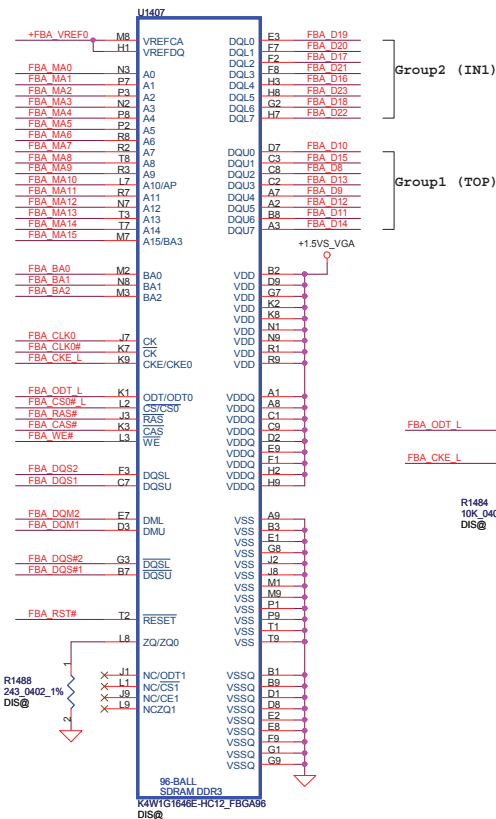
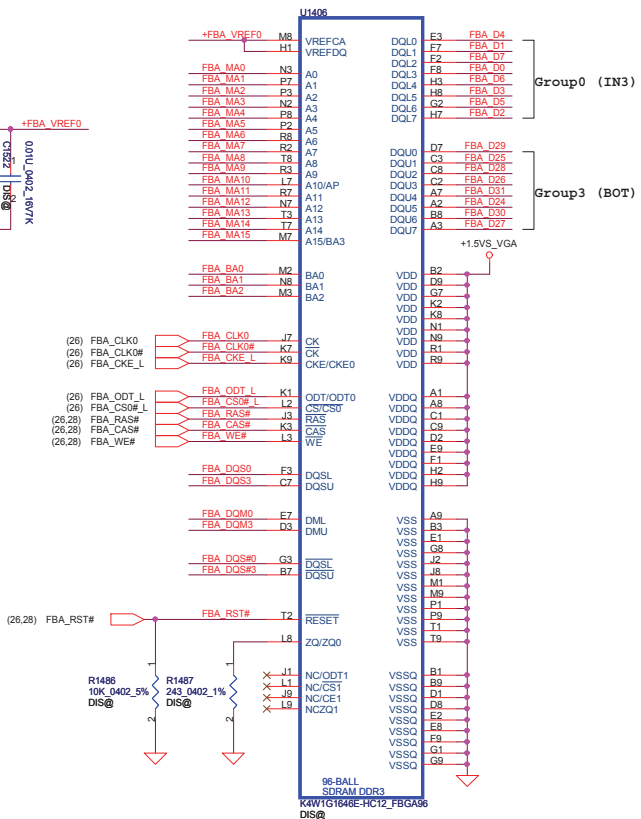



Mode D - Mirror Mode Mapping

DATA Bus	
Address	0..31 32..63
FBx_CMD0	CS0#_L
FBx_CMD1	
FBx_CMD2	ODT_L
FBx_CMD3	CKE_L
FBx_CMD4	A14 A14
FBx_CMD5	RST RST
FBx_CMD6	A9 A9
FBx_CMD7	A7 A7
FBx_CMD8	A2 A2
FBx_CMD9	A0 A0
FBx_CMD10	A4 A4
FBx_CMD11	A1 A1
FBx_CMD12	BA0 BA0
FBx_CMD13	WE# WE#
FBx_CMD14	A15 A15
FBx_CMD15	CAS# CAS#
FBx_CMD16	CS0#_H
FBx_CMD17	
FBx_CMD18	ODT_H
FBx_CMD19	CKE_H
FBx_CMD20	A13 A13
FBx_CMD21	A8 A8
FBx_CMD22	A6 A6
FBx_CMD23	A11 A11
FBx_CMD24	A5 A5
FBx_CMD25	A3 A3
FBx_CMD26	BA2 BA2
FBx_CMD27	BA1 BA1
FBx_CMD28	A12 A12
FBx_CMD29	A10 A10
FBx_CMD30	RAS# RAS#

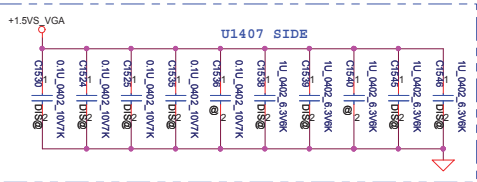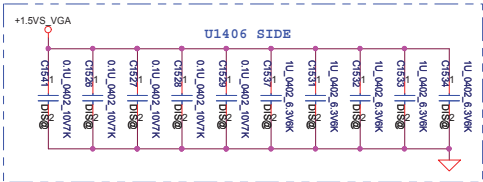



Memory Partition A - Upper 32 bits

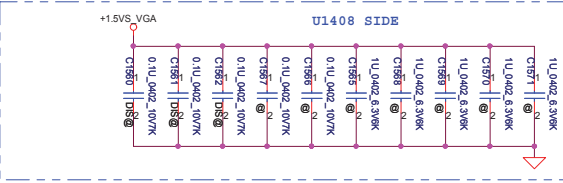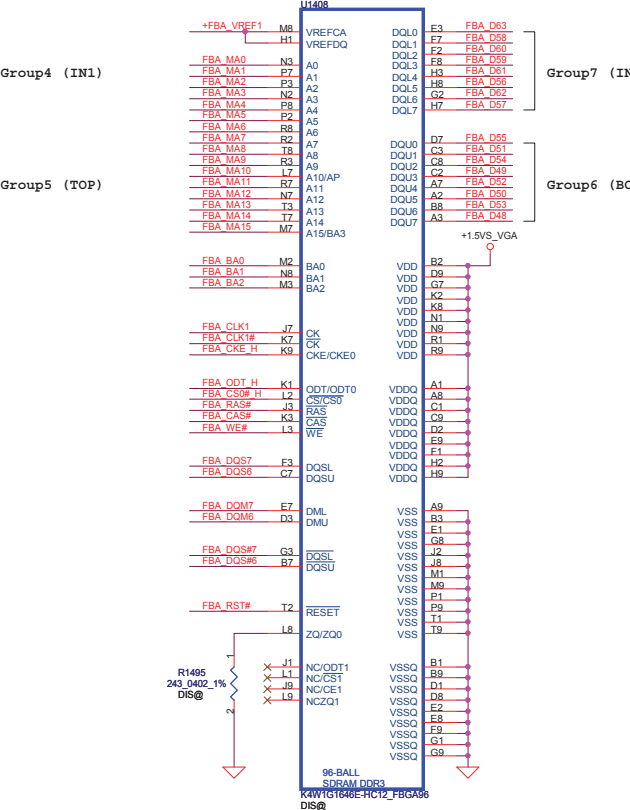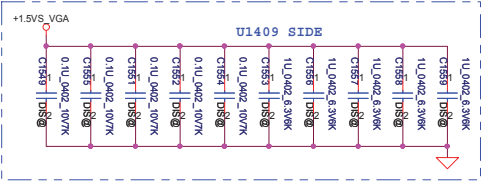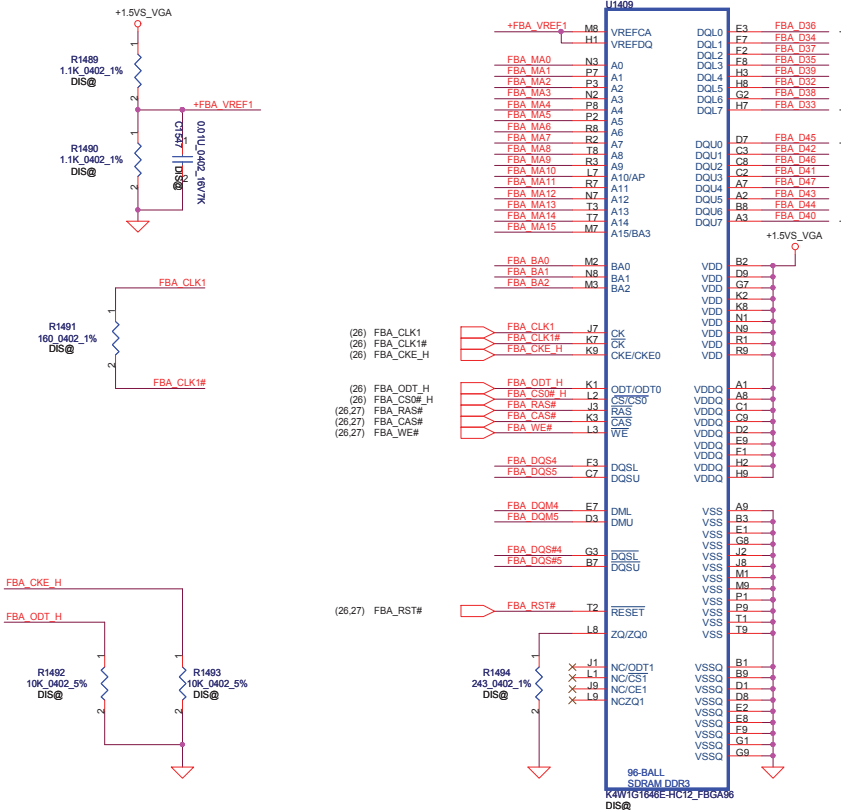

Mode D - Mirror Mode Mapping

DATA Bus	
Address	0..31 32..63
FBx_CMD0	CS0#_L
FBx_CMD1	
FBx_CMD2	ODT_L
FBx_CMD3	CKE_L
FBx_CMD4	A14 A14
FBx_CMD5	RST RST
FBx_CMD6	A9 A9
FBx_CMD7	A7 A7
FBx_CMD8	A2 A2
FBx_CMD9	A0 A0
FBx_CMD10	A4 A4
FBx_CMD11	A1 A1
FBx_CMD12	BA0 BA0
FBx_CMD13	WE# WE#
FBx_CMD14	A15 A15
FBx_CMD15	CAS# CAS#
FBx_CMD16	CS0#_H
FBx_CMD17	
FBx_CMD18	ODT_H
FBx_CMD19	CKE_H
FBx_CMD20	A13 A13
FBx_CMD21	A8 A8
FBx_CMD22	A6 A6
FBx_CMD23	A11 A11
FBx_CMD24	A5 A5
FBx_CMD25	A3 A3
FBx_CMD26	BA2 BA2
FBx_CMD27	BA1 BA1
FBx_CMD28	A12 A12
FBx_CMD29	A10 A10
FBx_CMD30	RAS# RAS#


Memory Partition C - Lower 32 bits

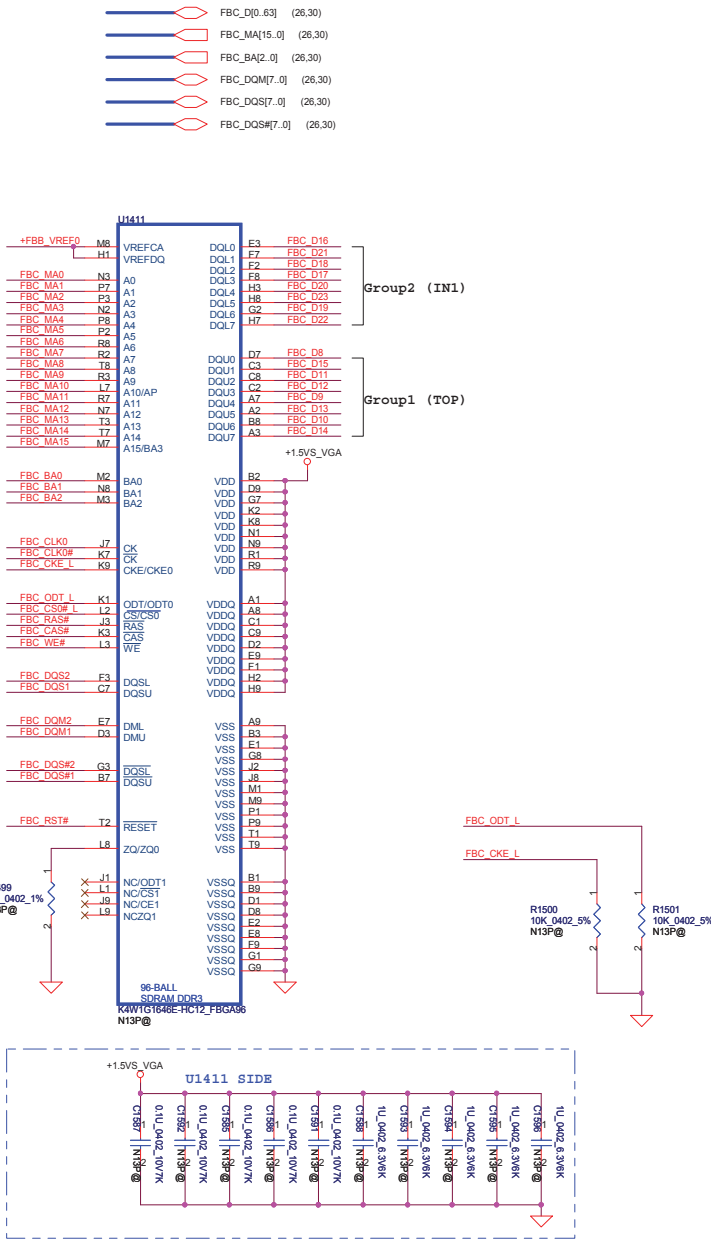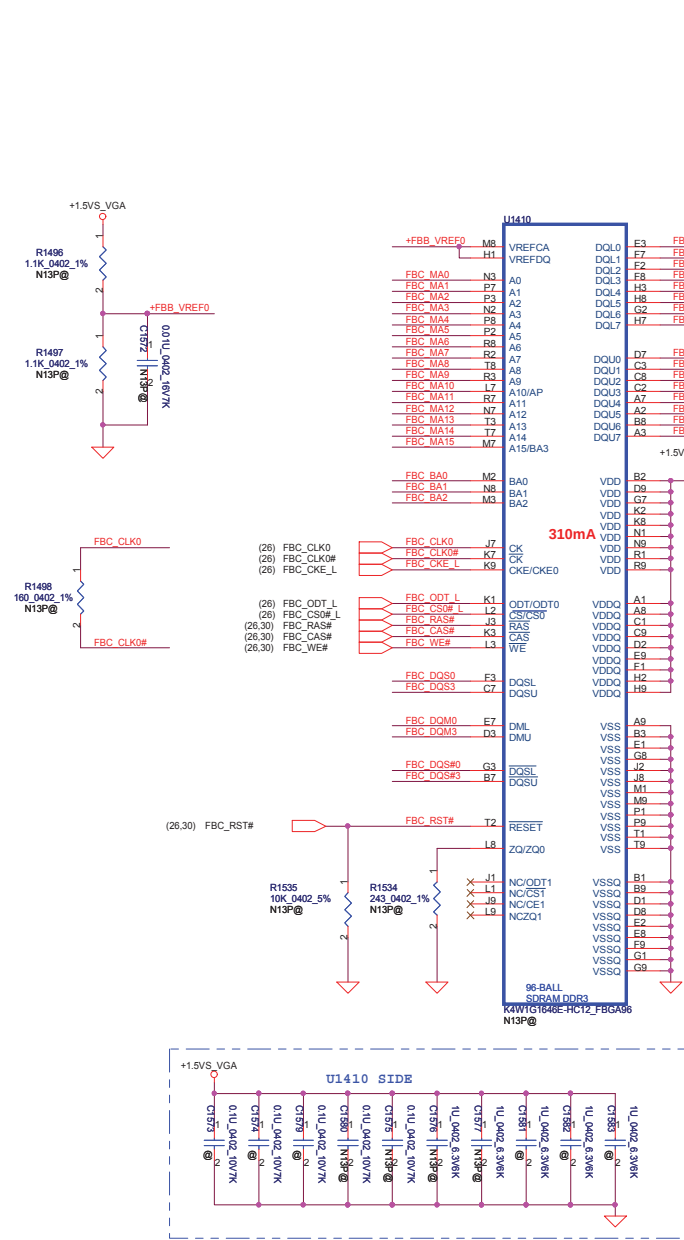

Mode D - Mirror Mode Mapping


DATA Bus	
Address	0..31 32..63
FBx_CMD0	CS0#_L
FBx_CMD1	
FBx_CMD2	ODT_L
FBx_CMD3	CKE_L
FBx_CMD4	A14
FBx_CMD5	RST
FBx_CMD6	A9
FBx_CMD7	A7
FBx_CMD8	A2
FBx_CMD9	A0
FBx_CMD10	A4
FBx_CMD11	A1
FBx_CMD12	BA0
FBx_CMD13	WE#
FBx_CMD14	A15
FBx_CMD15	CAS#
FBx_CMD16	CS0#_H
FBx_CMD17	
FBx_CMD18	ODT_H
FBx_CMD19	CKE_H
FBx_CMD20	A13
FBx_CMD21	A8
FBx_CMD22	A6
FBx_CMD23	A11
FBx_CMD24	A5
FBx_CMD25	A3
FBx_CMD26	BA2
FBx_CMD27	BA1
FBx_CMD28	A12
FBx_CMD29	A10
FBx_CMD30	RAS#

Memory Partition C - Upper 32 bits

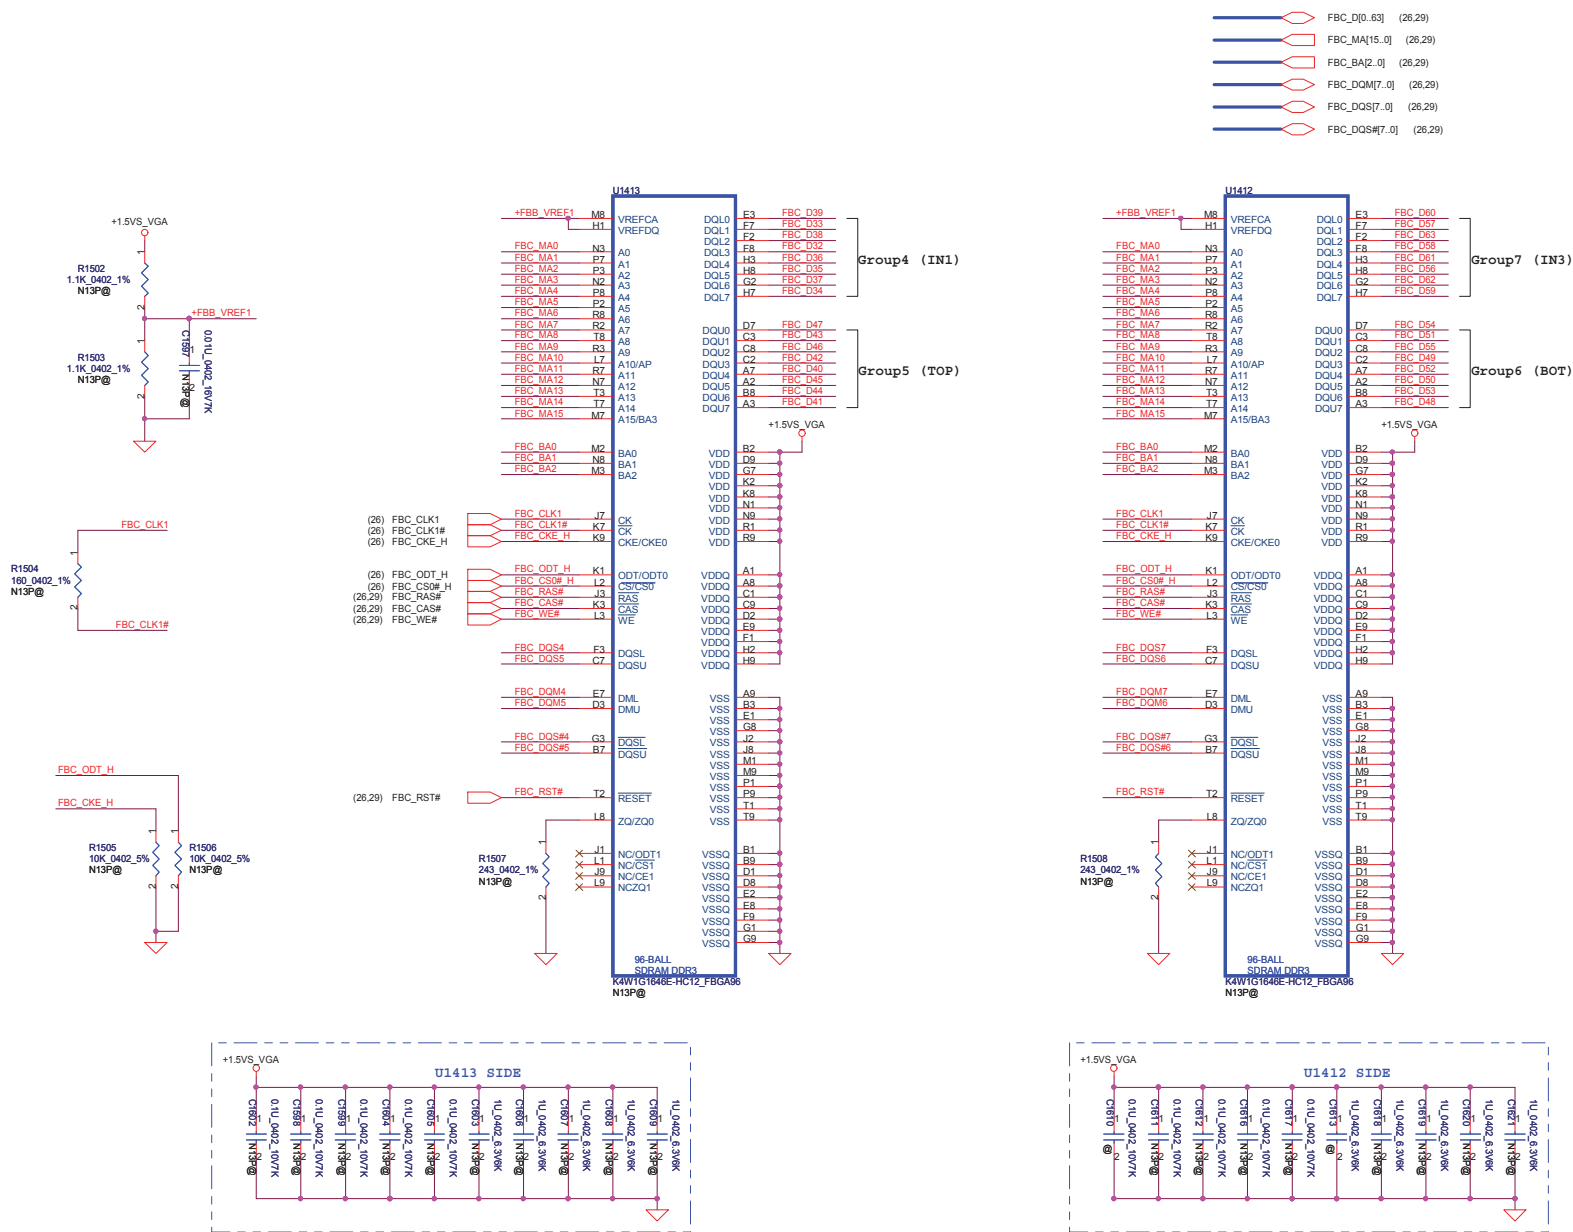

Mode D - Mirror Mode Mapping

DATA Bus		
Address	0..31	32..63
FBx_CMD0	CS0#_L	
FBx_CMD1		
FBx_CMD2	ODT_L	
FBx_CMD3	CKE_L	
FBx_CMD4	A14	A14
FBx_CMD5	RST	RST
FBx_CMD6	A9	A9
FBx_CMD7	A7	A7
FBx_CMD8	A2	A2
FBx_CMD9	A0	A0
FBx_CMD10	A4	A4
FBx_CMD11	A1	A1
FBx_CMD12	BA0	BA0
FBx_CMD13	WE#	WE#
FBx_CMD14	A15	A15
FBx_CMD15	CAS#	CAS#
FBx_CMD16		CS0#_H
FBx_CMD17		
FBx_CMD18		ODT_H
FBx_CMD19		CKE_H
FBx_CMD20	A13	A13
FBx_CMD21	A8	A8
FBx_CMD22	A6	A6
FBx_CMD23	A11	A11
FBx_CMD24	A5	A5
FBx_CMD25	A3	A3
FBx_CMD26	BA2	BA2
FBx_CMD27	BA1	BA1
FBx_CMD28	A12	A12
FBx_CMD29	A10	A10
FBx_CMD30	RAS#	RAS#

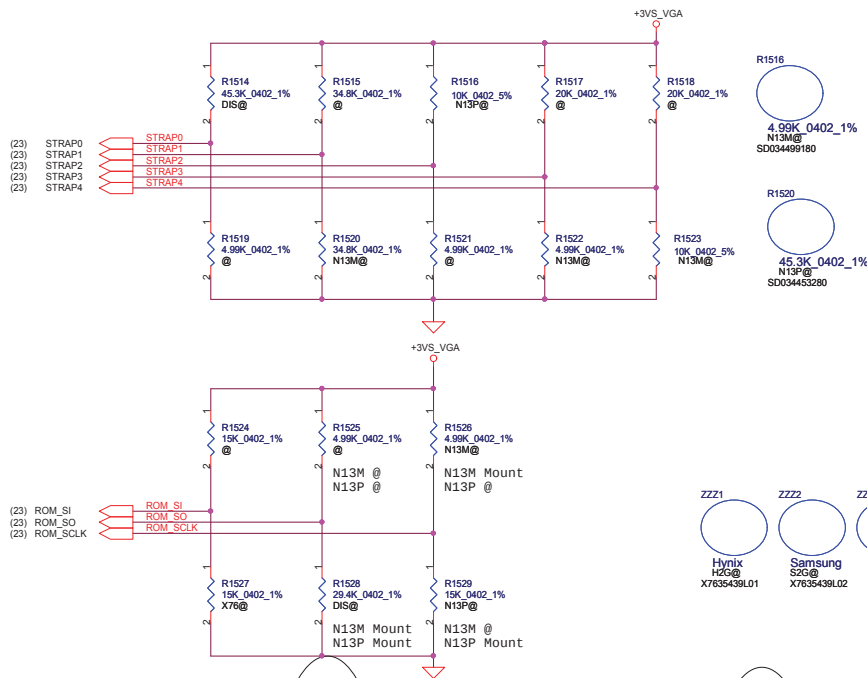

Physical Strapping pin	Power Rail	Logical Strapping Bit3	Logical Strapping Bit2	Logical Strapping Bit1	Logical Strapping Bit0
ROM_SCLK	+3VS_VGA	PCI_DEVID[4]	SUB_VENDOR	SLOT_CLK_CFG	PEX_PLL_EN_TERM
ROM_SI	+3VS_VGA	RAM_CFG[3]	RAM_CFG[2]	RAM_CFG[1]	RAM_CFG[0]
ROM_SO	+3VS_VGA	FB[1]	FB[0]	SMB_ALT_ADDR	VGA_DEVICE
STRAP0	+3VS_VGA	USER[3]	USER[2]	USER[1]	USER[0]
STRAP1	+3VS_VGA	3GIO_PAD_CFG_ADR[3]	3GIO_PAD_CFG_ADR[2]	3GIO_PAD_CFG_ADR[1]	3GIO_PAD_CFG_ADR[0]
STRAP2	+3VS_VGA	PCI_DEVID[3]	PCI_DEVID[2]	PCI_DEVID[1]	PCI_DEVID[0]
STRAP3	+3VS_VGA	SOR3_EXPOSED	SOR2_EXPOSED	SOR1_EXPOSED	SOR0_EXPOSED
STRAP4	+3VS_VGA	RESERVED	PCIE_SPEED_CHANGE_GEN3	PCIE_MAX_SPEED	DP_PLL_VDD33V

Resistor Values	Pull-up to +3VS_VGA	Pull-down to Gnd
5K	1000	0000
10K	1001	0001
15K	1010	0010
20K	1011	0011
25K	1100	0100
30K	1101	0101
35K	1110	0110
45K	1111	0111

SUB_VENDOR	
0	No VBIOS ROM
1	BIOS ROM is present (Default)

3GIO_PADCFG	
3GIO_PADCFG[3:0]	
0110	Notebook Default

XCLK_417	
0	277MHz (Default)
1	Reserved

FB 0 BAR_SIZE	
0	Reserved
1	Reserved
2	256MB (Default)
3	Reserved

SLOT_CLK_CFG	
0	GPU and MCH don't share a common reference clock
1	GPU and MCH share a common reference clock (Default)

SMBUS_ALT_ADDR	
0	0x9E (Default)
1	0x9C (Multi-GPU usage)

VGA_DEVICE	
0	3D Device (Class Code 302h)
1	VGA Device (Default)

USER Straps	
User[3:0]	
1000-1100	Customer defined

PCIE_MAX_SPEED	
0	Limit to PCIE Gen1
1	PCIE Gen 2/3 Capable



PEX_PLL_EN_TERM	
0	Disable (Default)
1	Enable


GPU	FB Memory gDDR3		ROM_SO	ROM_SCLK	ROM_SI	STRAP0	STRAP1	STRAP2	STRAP3	STRAP4
N13P-GL	Samsung 900MHz	K4W1G1646G-BC11	PD 10K	PD 15K	PD 20K	PU 45K	PD 45K	PU 10K	NC	NC
		64Mx16						PU 45K (ES)		
	Hynix 900MHz	H5TQ1G63DFR-11C	PD 10K	PD 15K	PD 15K	PU 45K	PD 45K	PU 10K	NC	NC
		64Mx16						PU 45K (ES)		
	Samsung 900MHz	K4W2G1646C-HC11	PD 10K	PD 15K	PD 45K	PU 45K	PD 45K	PU 10K	NC	NC
		128Mx16						PU 45K (ES)		
	Hynix 900MHz	H5TQ2G63BFR-11C	PD 10K	PD 15K	PD 35K	PU 45K	PD 45K	PU 10K	NC	NC
		128Mx16						PU 45K (ES)		

GPU	FB Memory gDDR3		ROM_SO	ROM_SCLK	ROM_SI	STRAP0	STRAP1	STRAP2	STRAP3	STRAP4
N13M-GE1	Samsung 900MHz	K4W1G1646G-BC11	PD 30K	PU 5K	PD 20K	PU 45K	PD 35K	PU 5K	PD 5K	PD 10K
		64Mx16								
	Hynix 900MHz	H5TQ1G63DFR-11C	PD 30K	PU 5K	PD 15K	PU 45K	PD 35K	PU 5K	PD 5K	PD 10K
		64Mx16								
	Samsung 900MHz	K4W2G1646C-HC11	PD 30K	PU 5K	PD 45K	PU 45K	PD 35K	PU 5K	PD 5K	PD 10K
		128Mx16								
	Hynix 900MHz	H5TQ2G63BFR-11C	PD 30K	PU 5K	PD 35K	PU 45K	PD 35K	PU 5K	PD 5K	PD 10K
		128Mx16								





9/27
from 15K to 5K

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	N13X-MISC
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size Custom	Document Number
				Date: Friday, January 08, 2012	Rev 0.6
				LA-8131P	Sheet 31 of 58

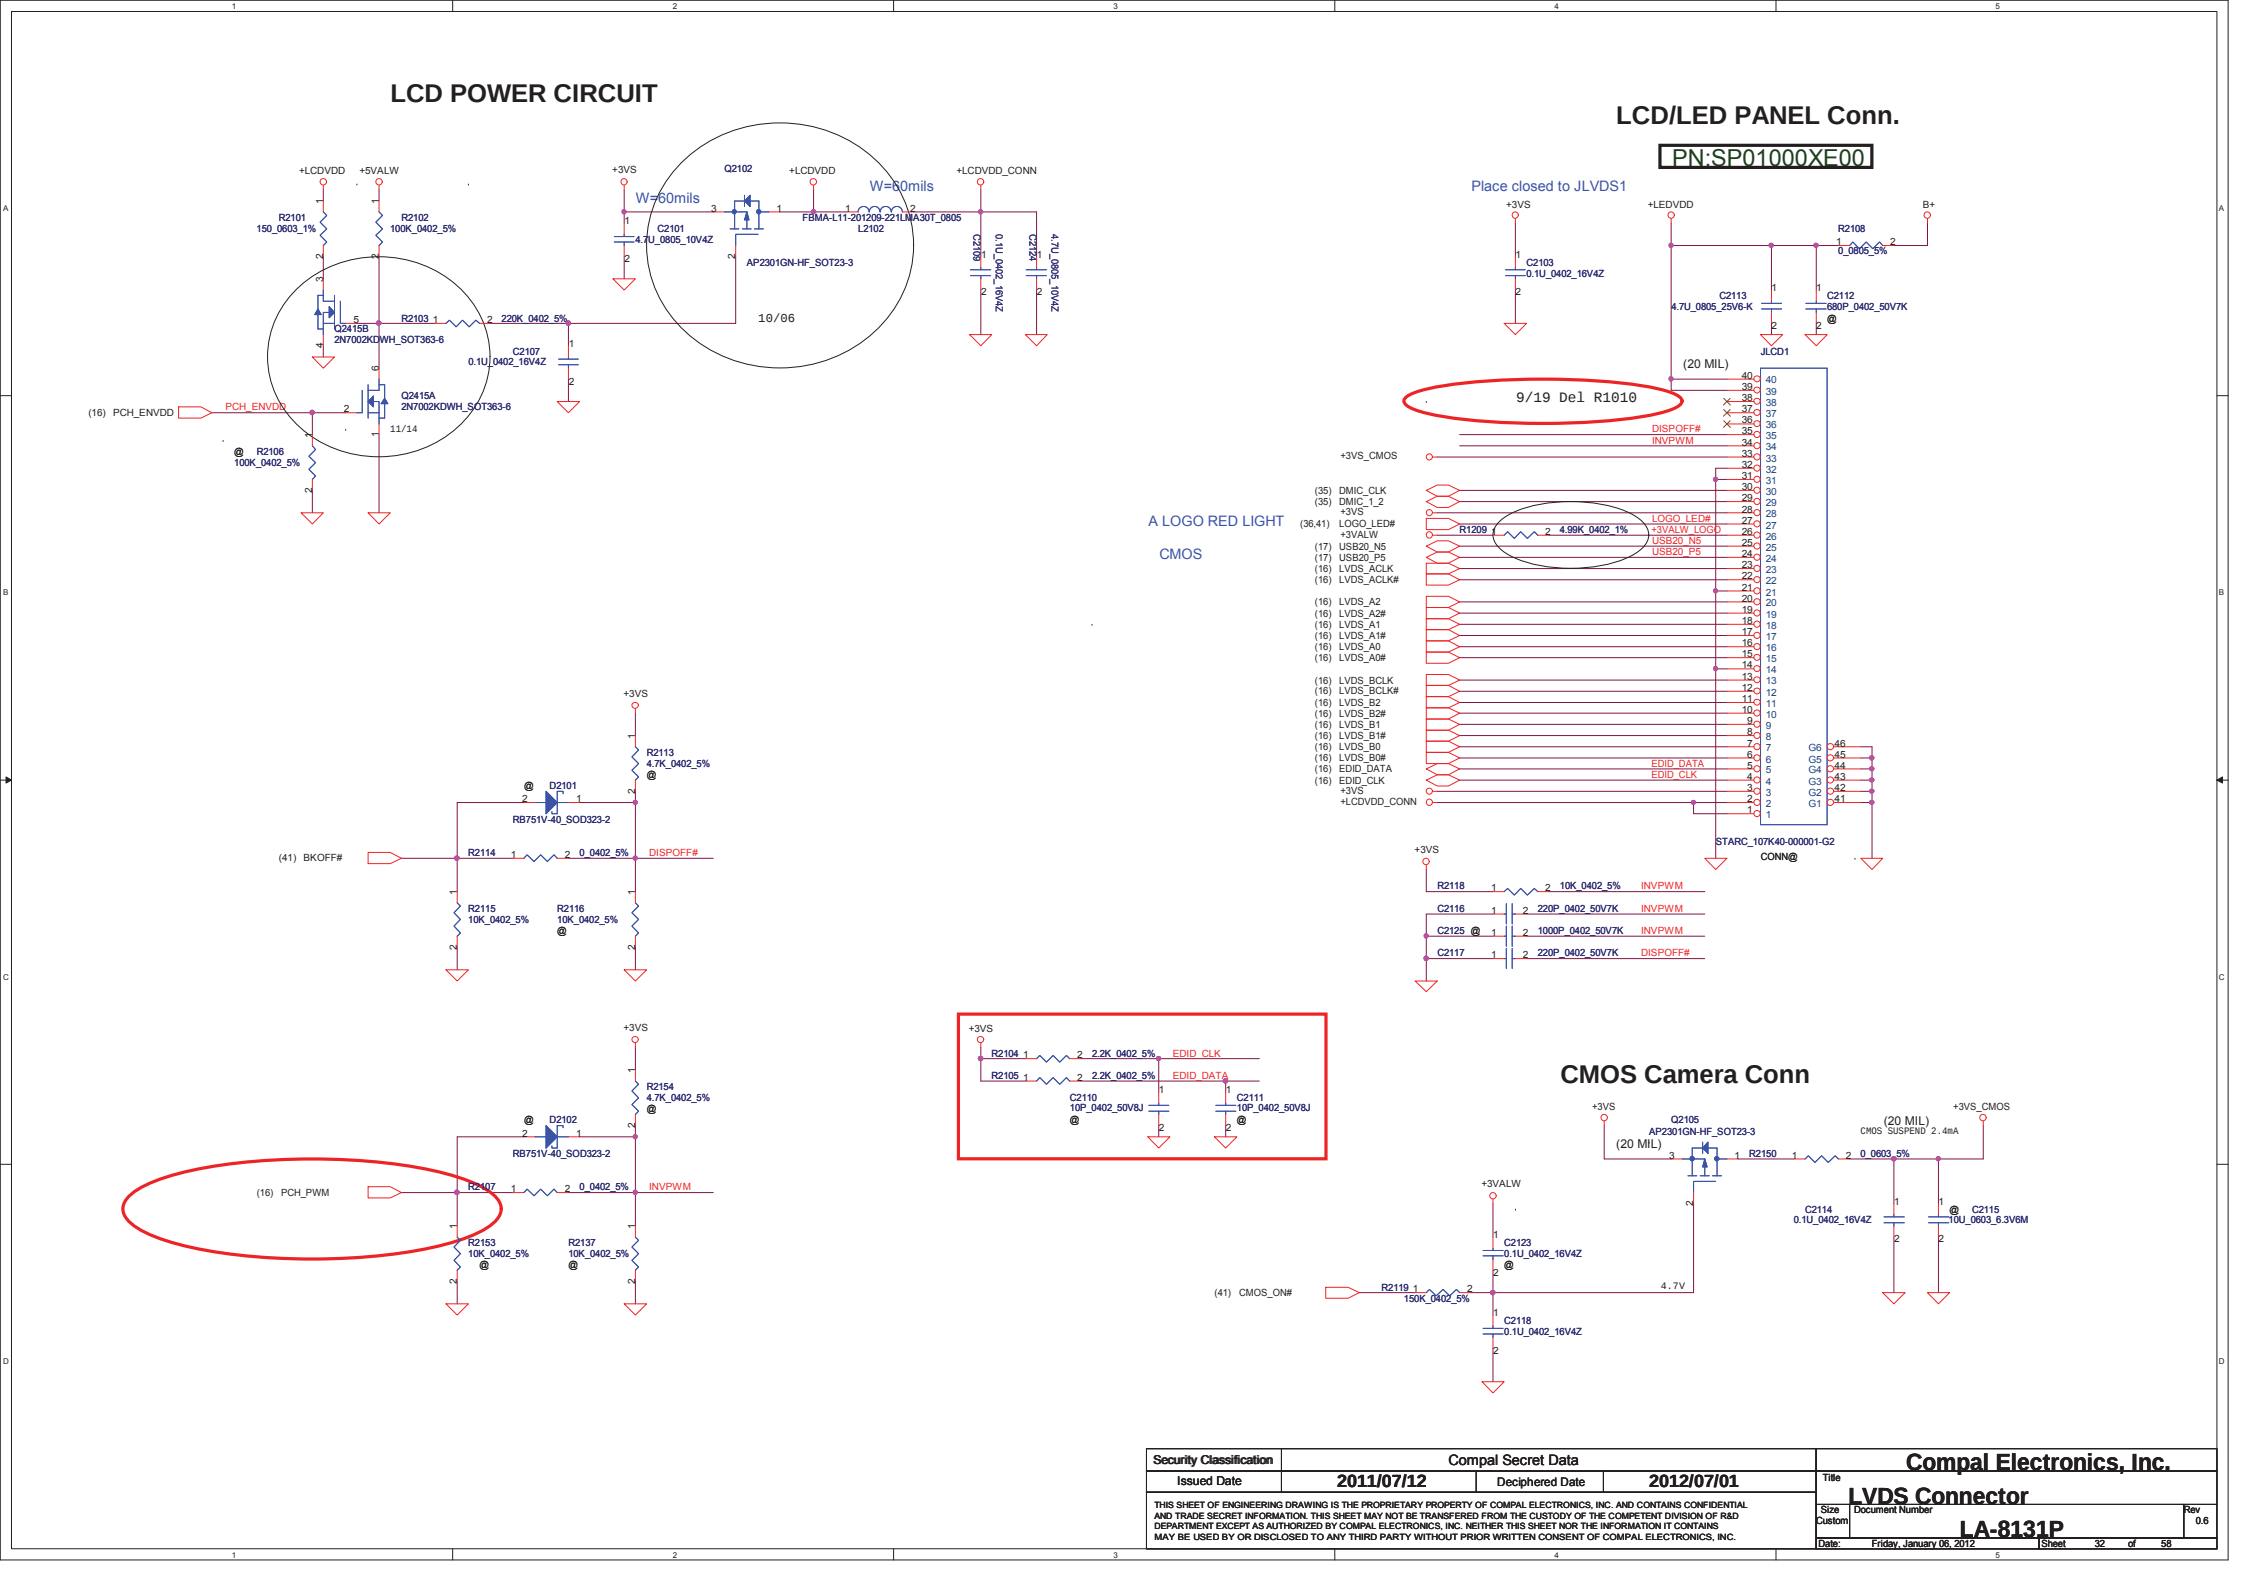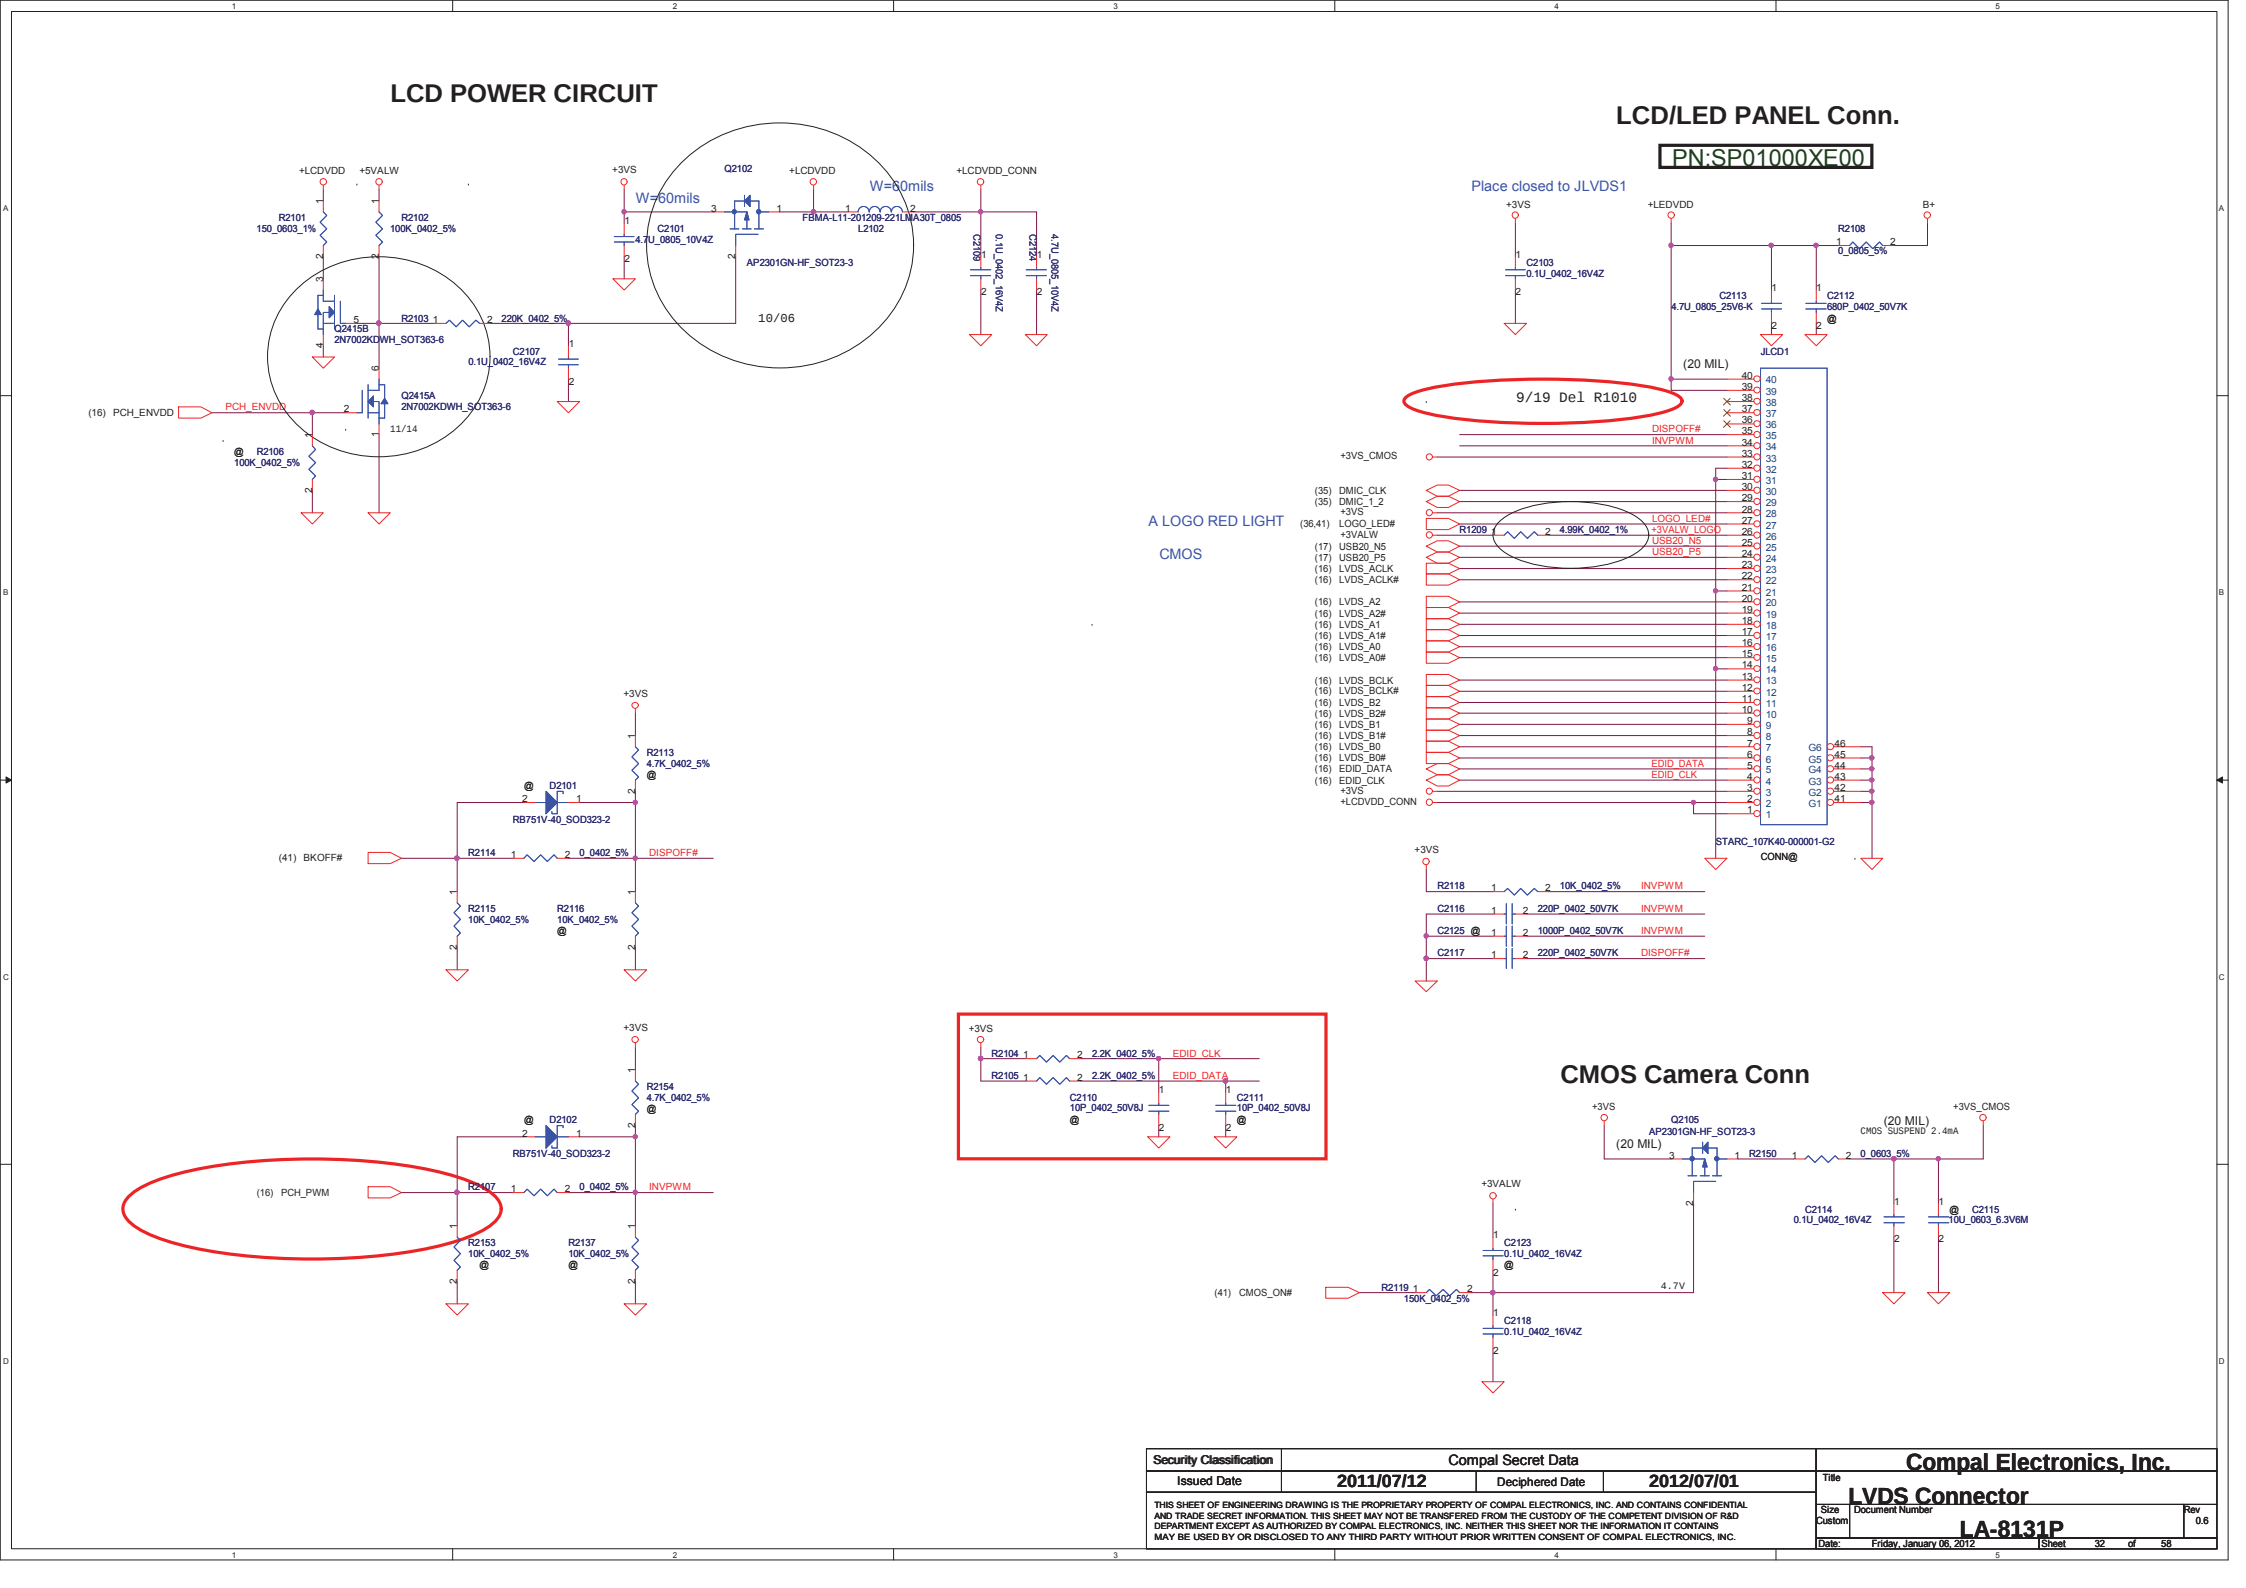[illegible][illegible]

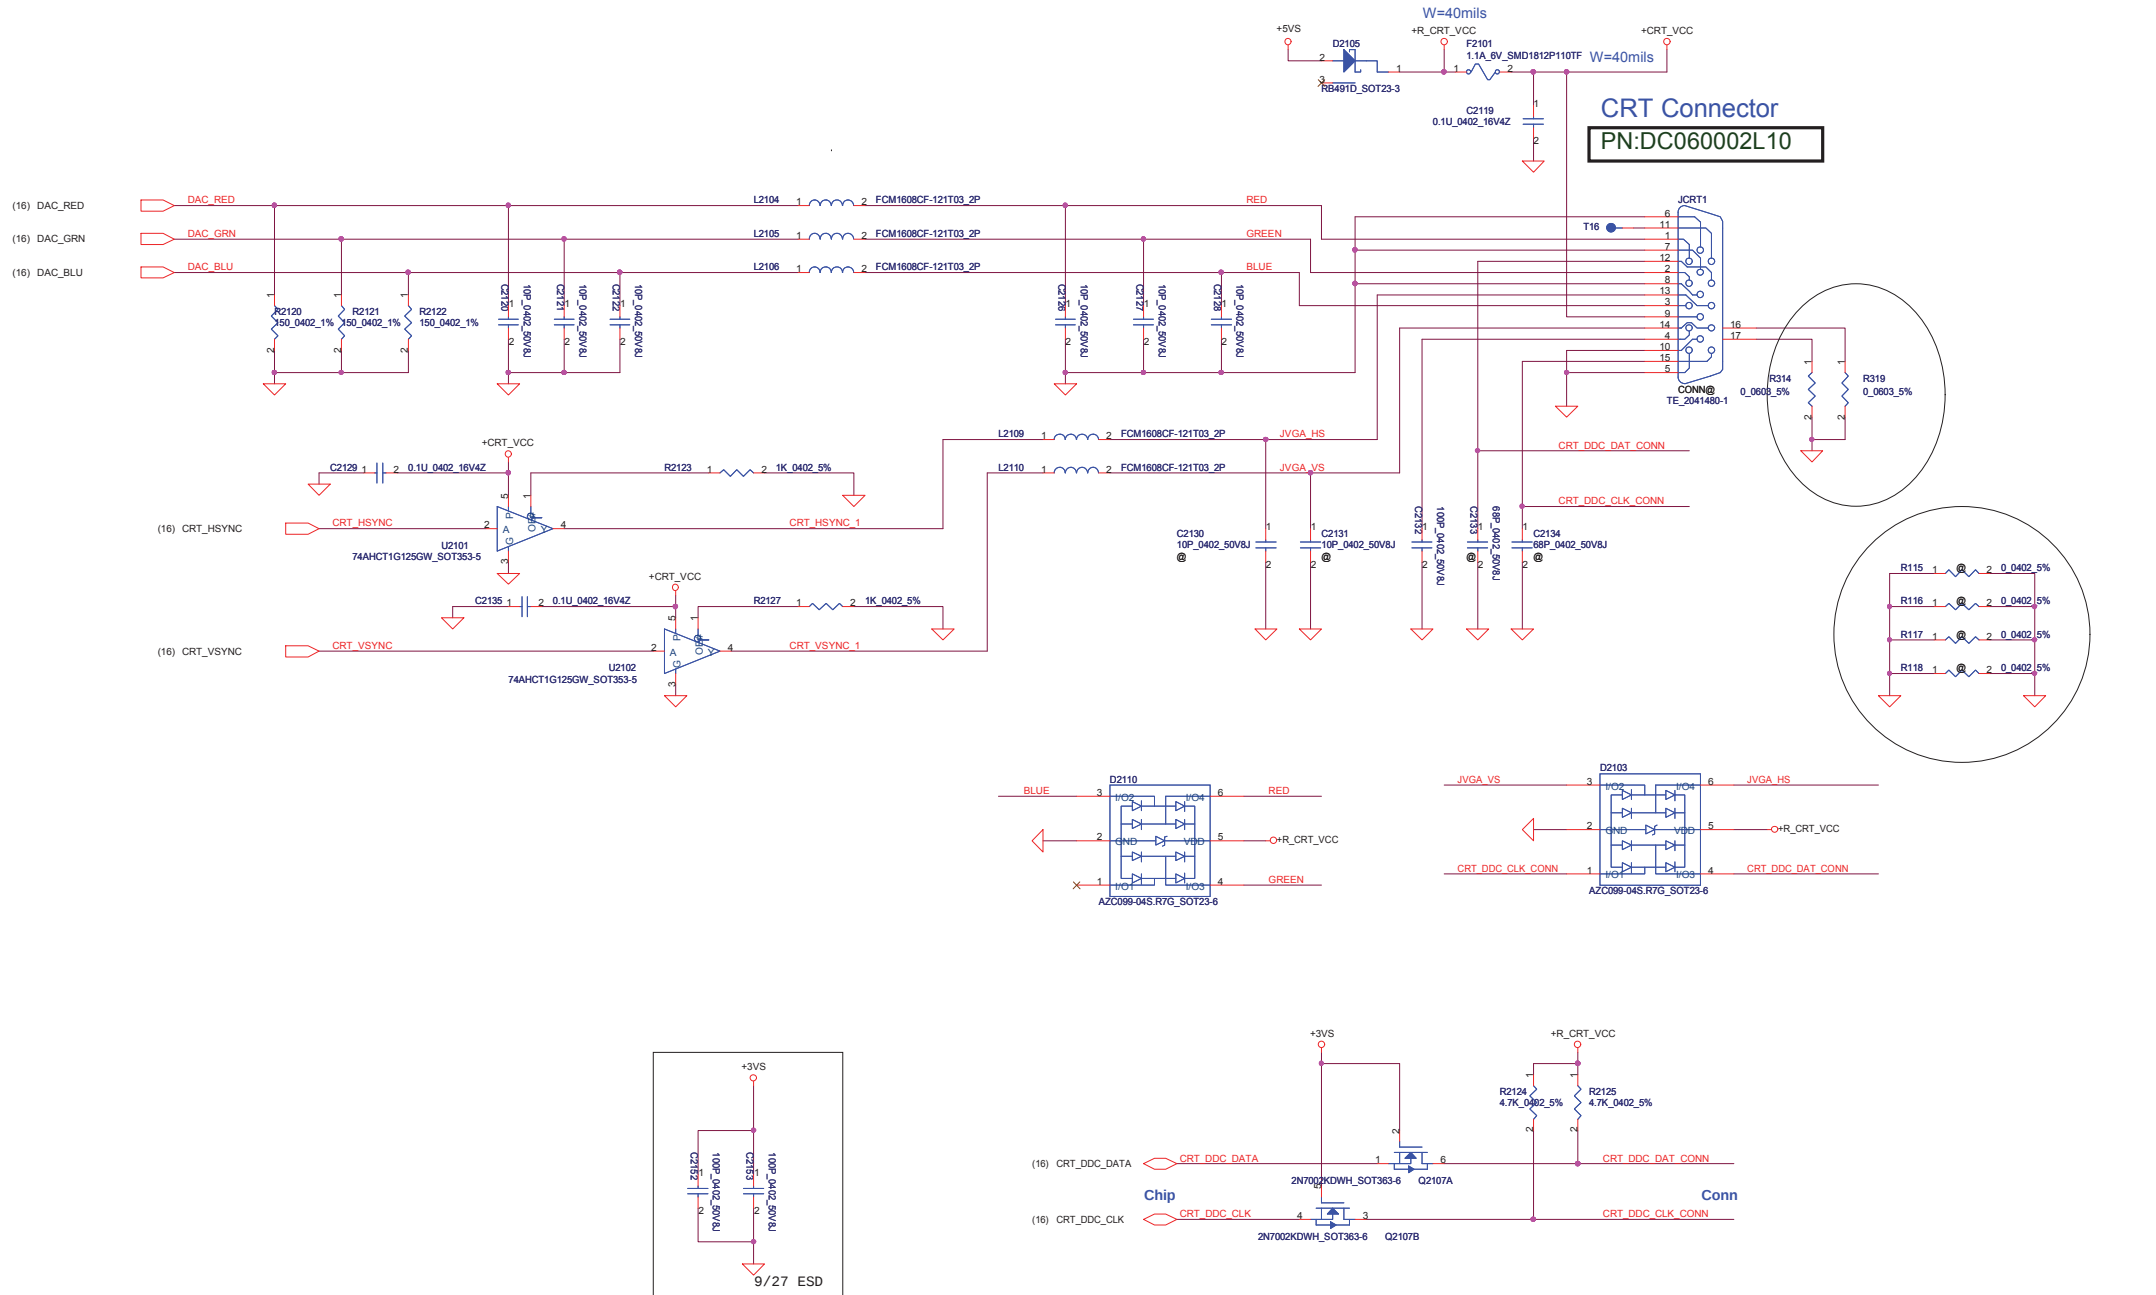


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	CRT Connector
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size Custom	Document Number LA-8131P
				Date: Tuesday, January 10, 2012	Rev 0.6
				Sheet 33 of 58	

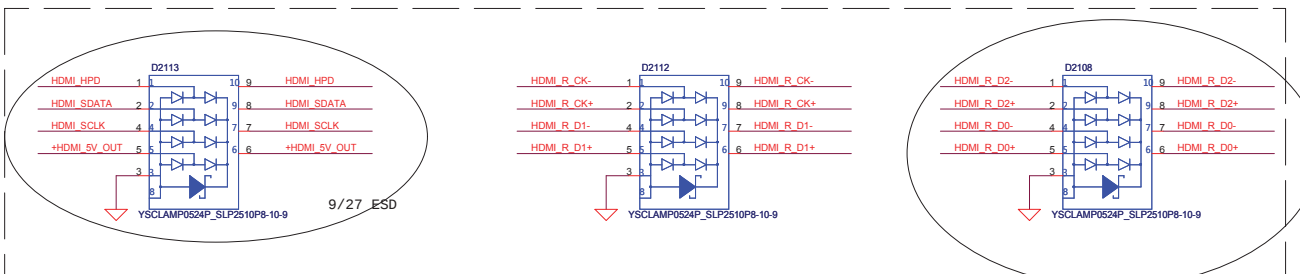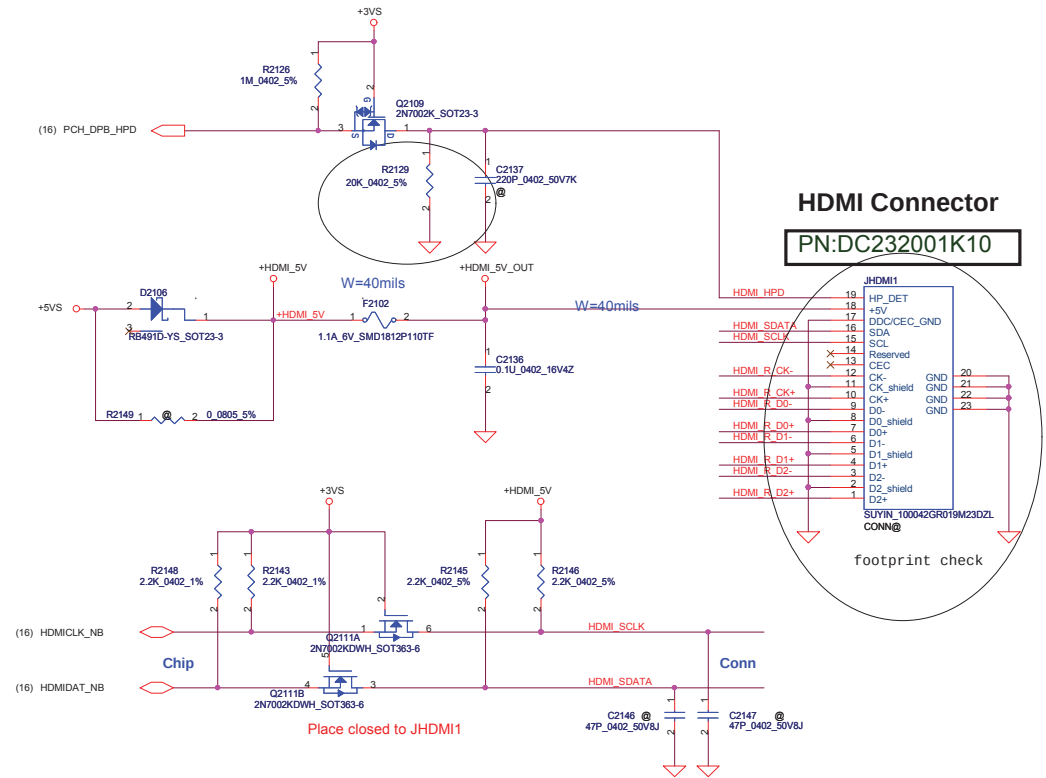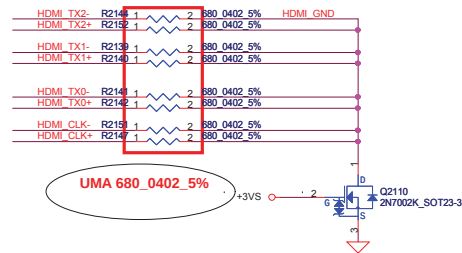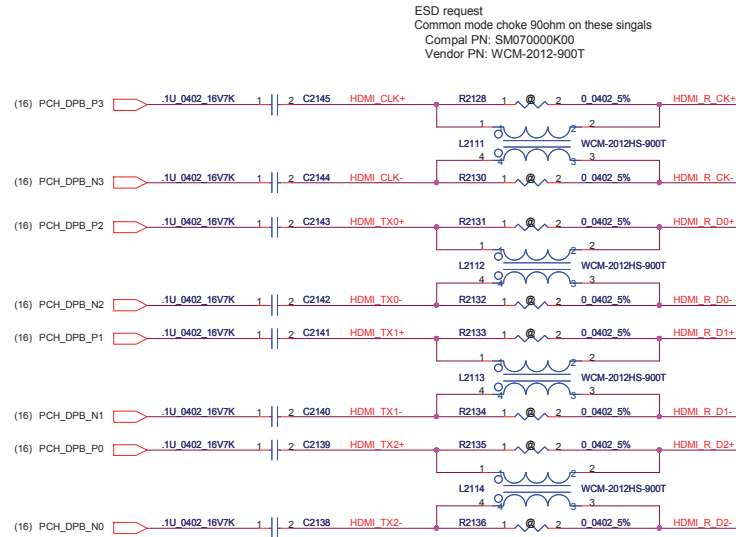

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	HDMI Connector
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Custom
				Document Number	LA-8131P
				Date	Tuesday, January 10, 2012
				Sheet	34 of 58
				Rev	0.6


SATA HDD CONN.

PN:DC010004C00

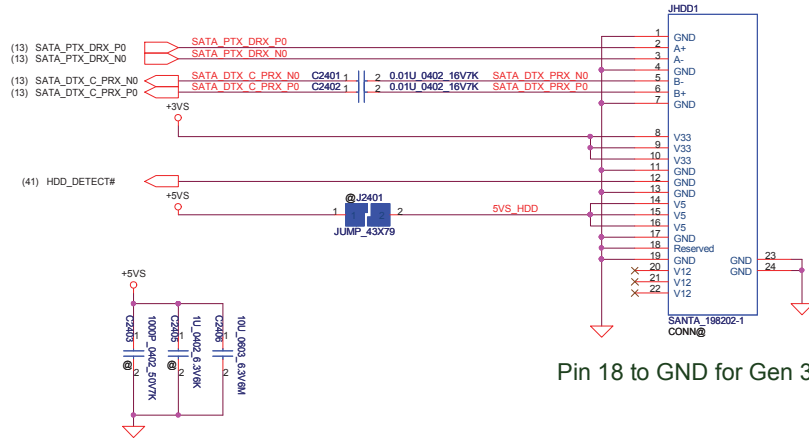


Card Reader CONN.

PN:SP01001BF00

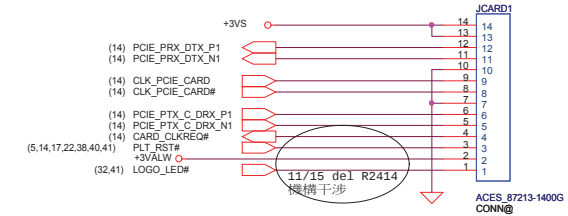


SATA ODD CONN.

PN:SP01000TU10



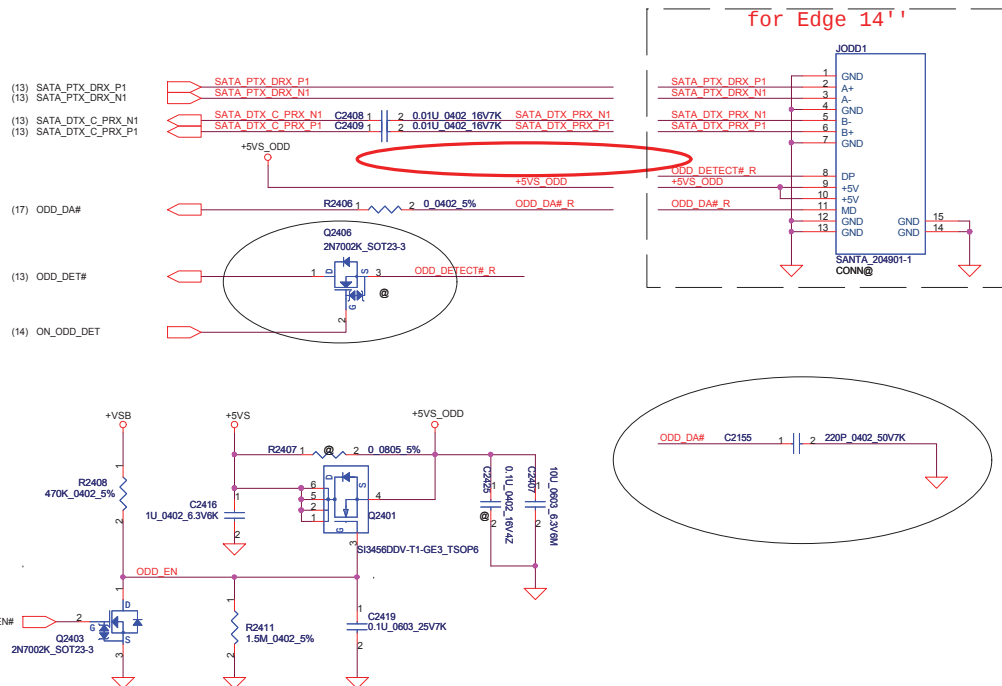


APS G-Sensor

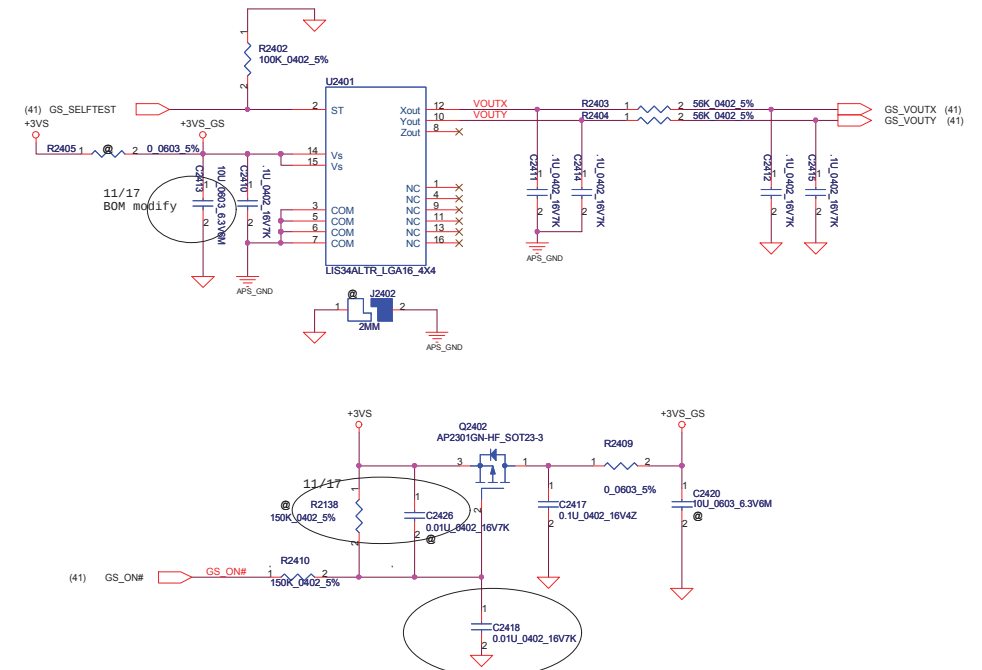

Security Classification		Compal Secret Data		Title	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Size	Document Number
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				HDD/ODD/Card reader/G-Sensor	
				LA-8131P	
				Date	Friday, January 08, 2012
				Sheet	36 of 58

USB 3.0 Conn.

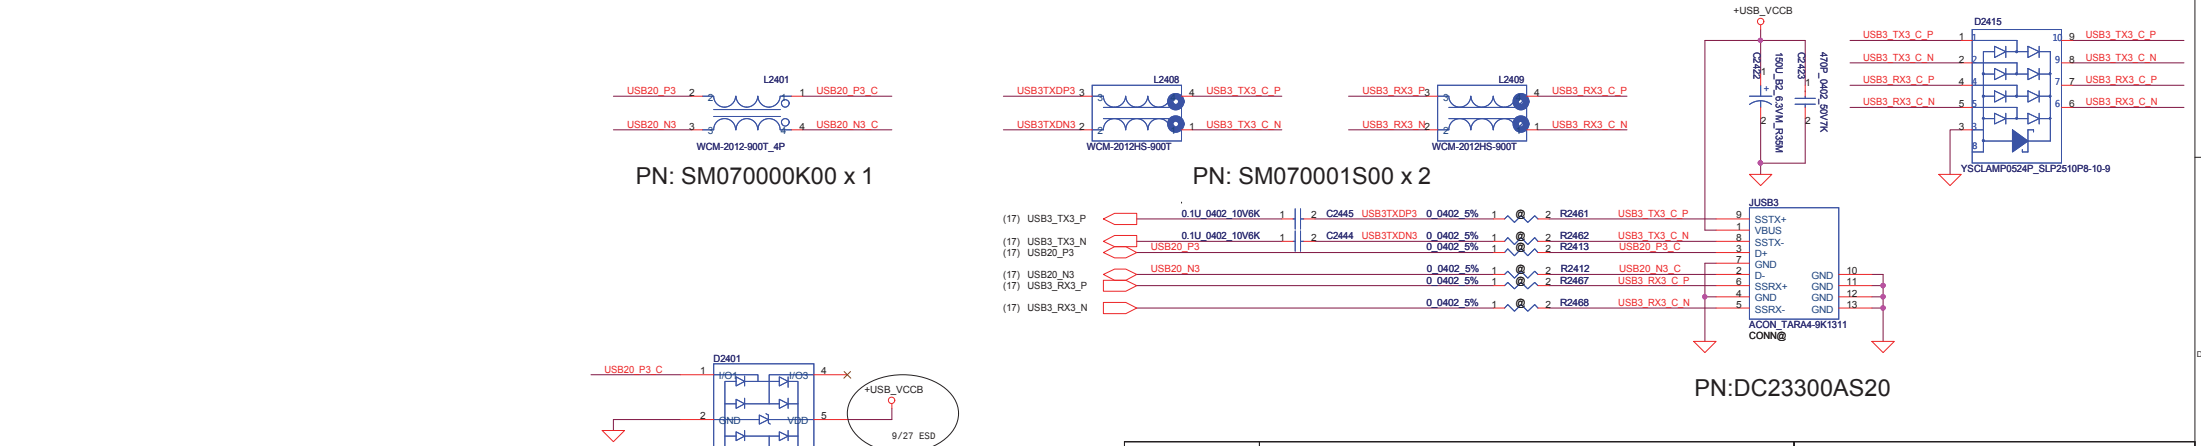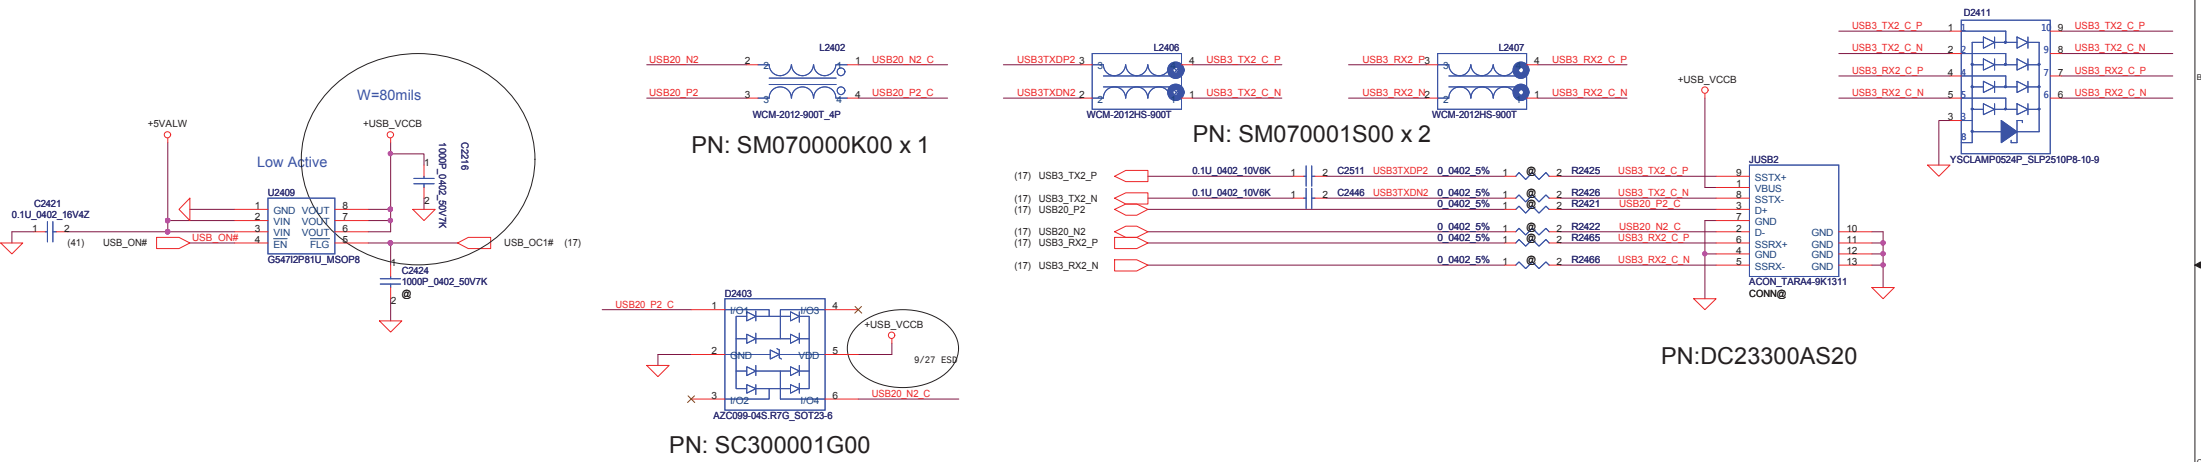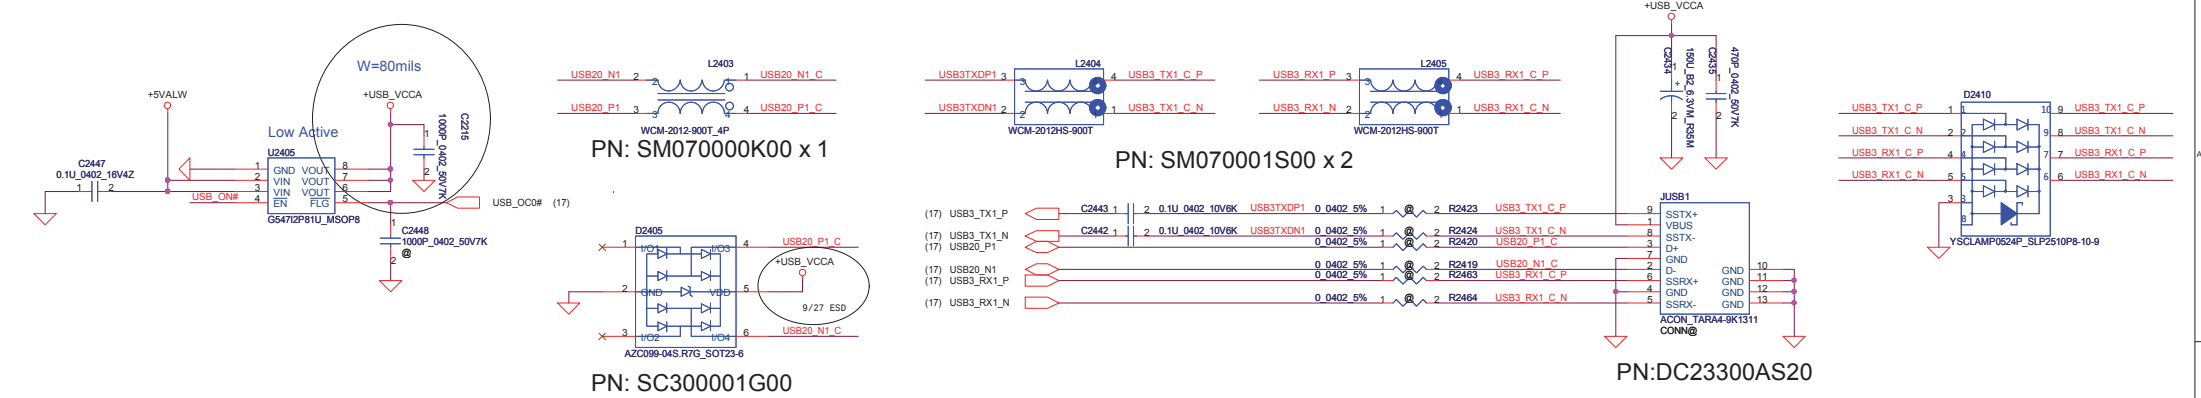


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	USB 3.0 Connector
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Document Number
				Custom	LA-8131P
				Date	Friday, January 08, 2012
				Sheet	37 of 58

Mini-Express Card for WLAN/WiMAX(Half)

Mini-Express Card(WLAN/WiMAX)



PN:SP07000JP00

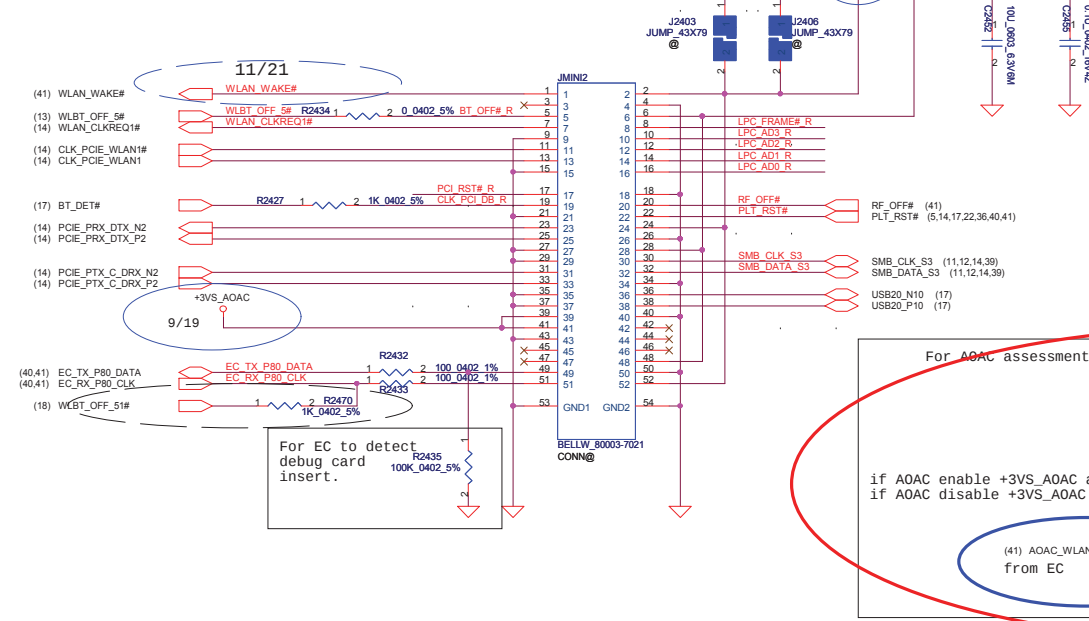

Mini Card Power Rating

Power	Primary Power (mA)		Auxiliary Power (mA)
	Peak	Normal	
+3VS	1000	750	Normal
+3V	330	250	250 (wake enable)
+1.5VS	500	375	5 (Not wake enable)

BT Connector

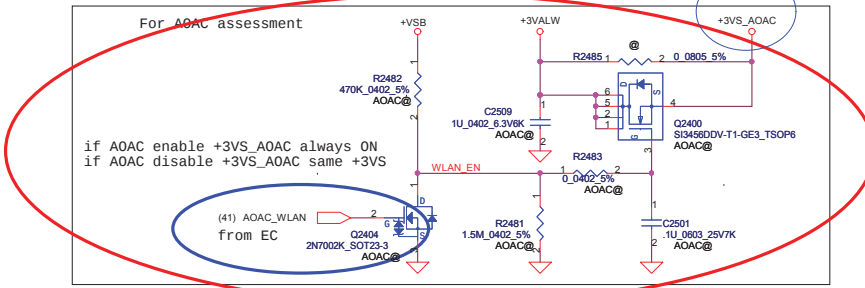
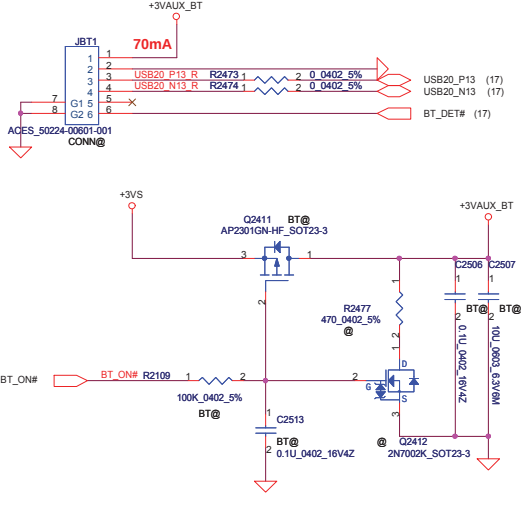


Reserve for SW mini-pcie debug card.
Series resistors closed to KBC side.

LPC_FRAME#_R	R2449	2	0	0402_5%	LPC_FRAME#				
LPC_AD3_R	R2450	2	0	0402_5%	LPC_AD3				
LPC_AD2_R	R2451	2	0	0402_5%	LPC_AD2				
LPC_AD1_R	R2452	2	0	0402_5%	LPC_AD1				
LPC_AD0_R	R2453	2	0	0402_5%	LPC_AD0				
PLT_RST#_R	R2454	2	0	0402_5%	PLT_RST#				
CLK_PCI_DB_R	R2455	2	0	0402_5%	CLK_PCI_DB				


Mini-Express Card for WWAN/mSATA(Full)

PN:SP07000JP00

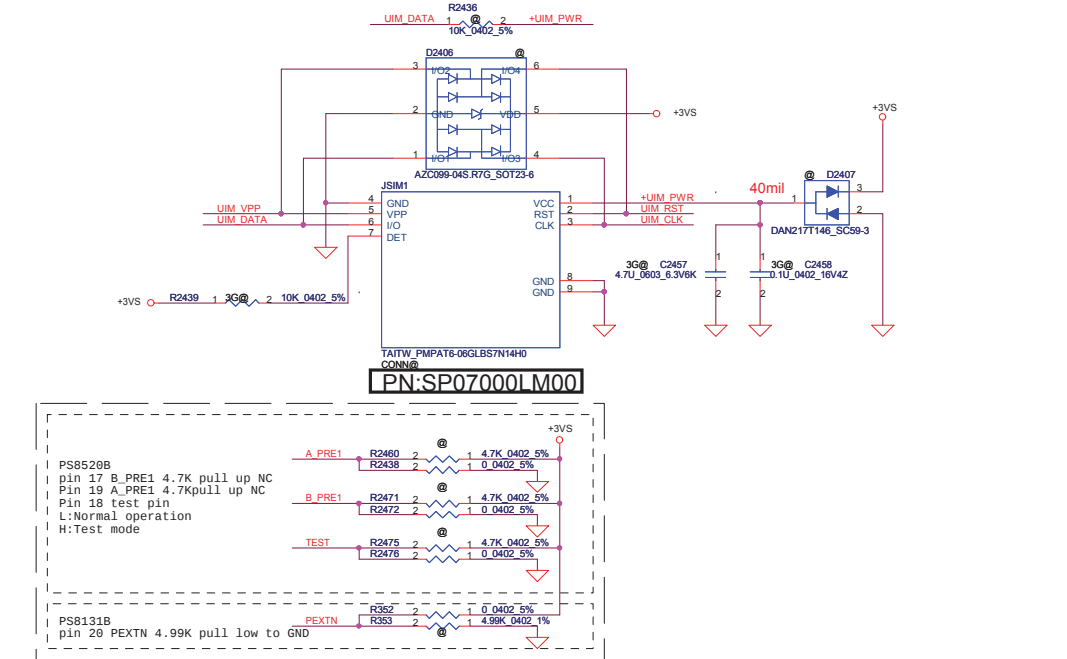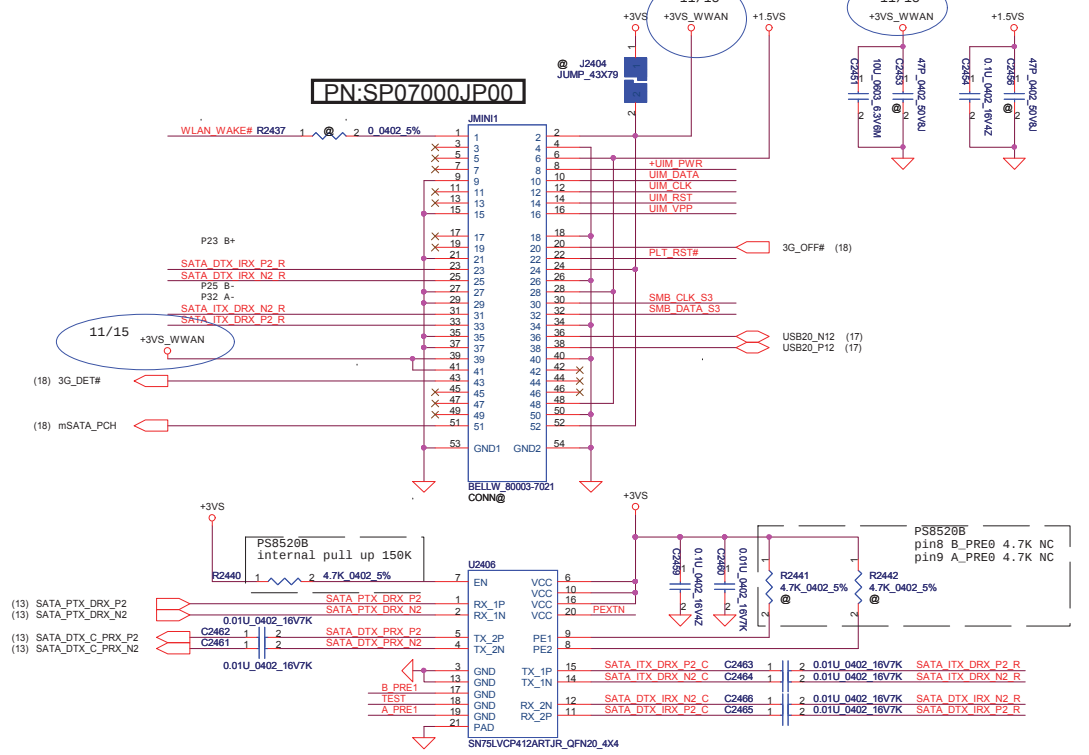


Security Classification	Compal Secret Data	Document Number	LA-8131P
Issued Date	2011/07/12	Deciphered Date	2012/07/01
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RAD DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.			

INT_KBD Conn.

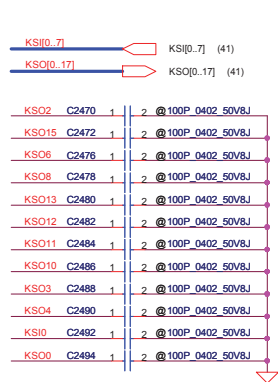


CONN PIN define need double check

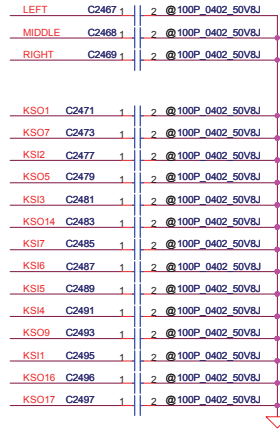

Reserve for ESD.

M1(Left BUTTON)
M2(Center BUTTON)
M3(Right BUTTON)


PN:SP01000YH00

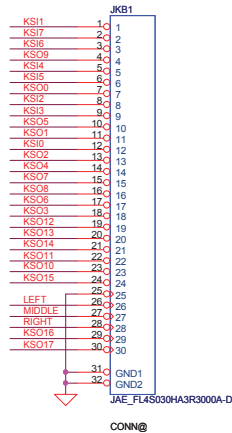

CONN@


Click pad

PN:SP01001AL00

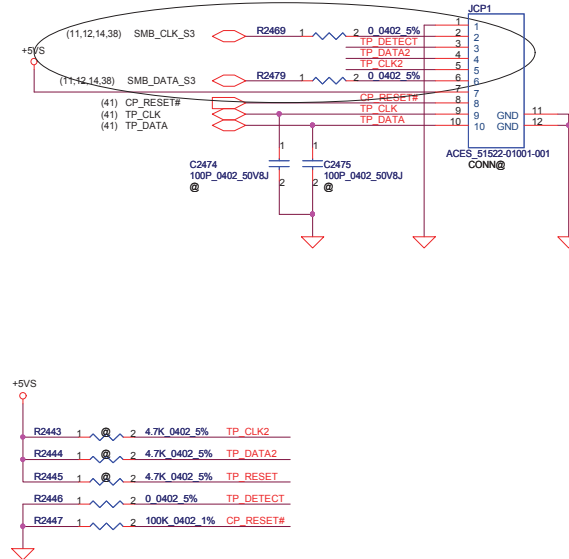


Track point

PN:SP01001CH00

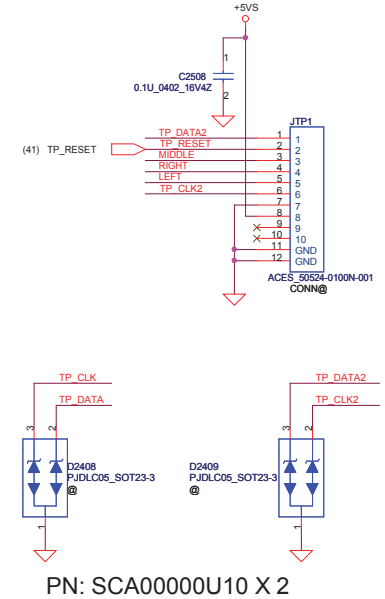


PN: SCA00000U10 X 2

Fintek thermal sensor placed near by TOP DDR3

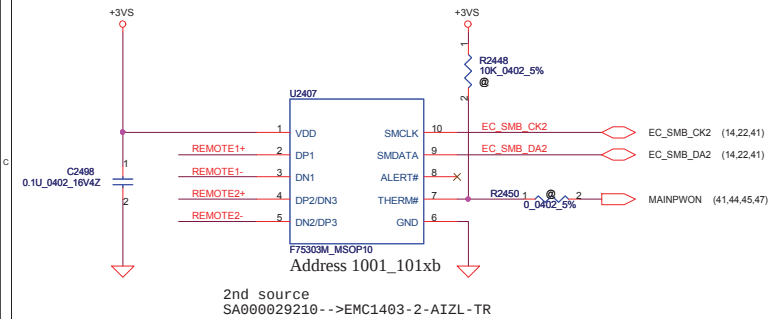


2nd source
SA000029210-->EMC1403-2-AIZL-TR


Close U2407



BOTTOM DDR3




TOP CPU_CORE



REMOTE1, 2+/-:
Trace width/space:10/10 mil
Trace length:<8"


FAN CONN.

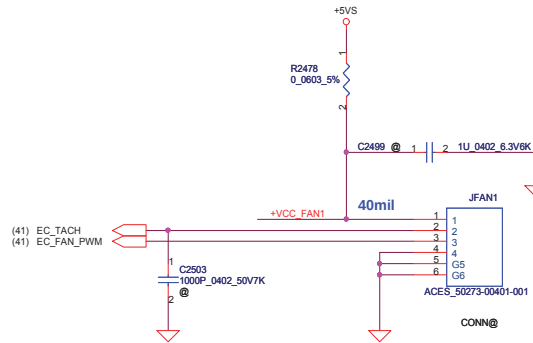

PN:SP02000U900


Audio Board

PN:SP011108040

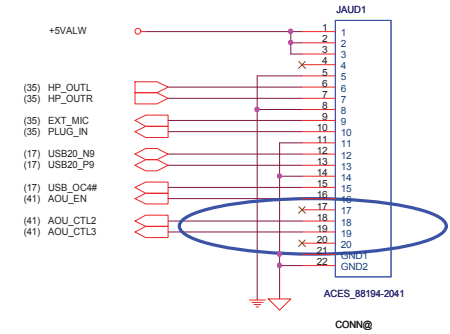


Security Classification		Compal Secret Data		Title	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Size	Document Number
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RAD DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				LA-8131P	
Date: Friday, January 08, 2012				Sheet	39 of 58


Power Button

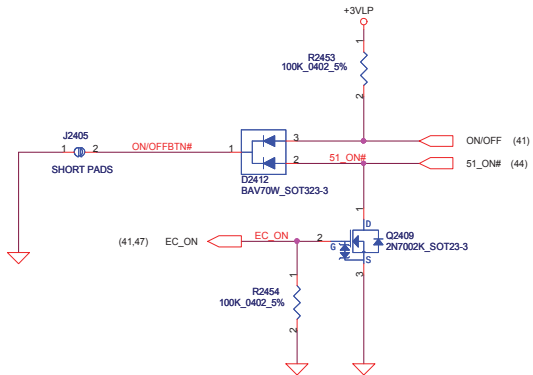


Power Button CONN.

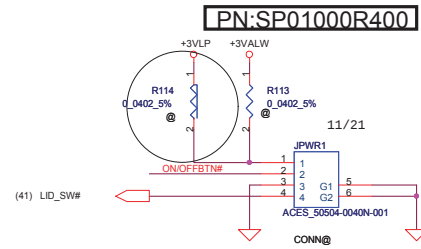


Finger Print Board

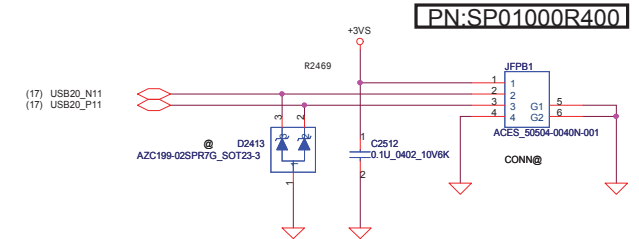


TPM

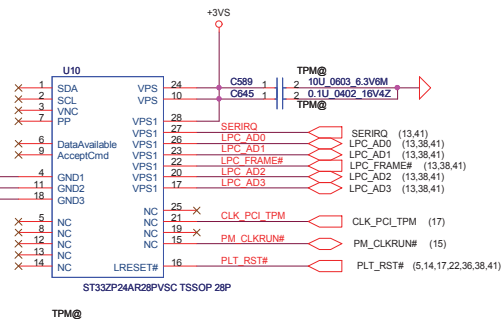


Debug Conn.

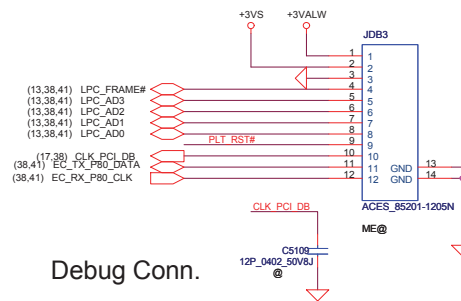

RJ45 Board

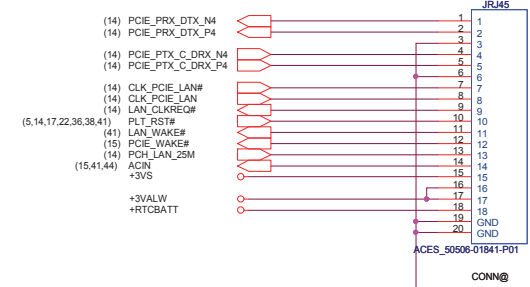


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	PWR Button/Power OK/RJ45
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Custom
				Document Number	LA-8131P
				Date	Tuesday, January 10, 2012
				Sheet	40 of 58
				Rev	0.6

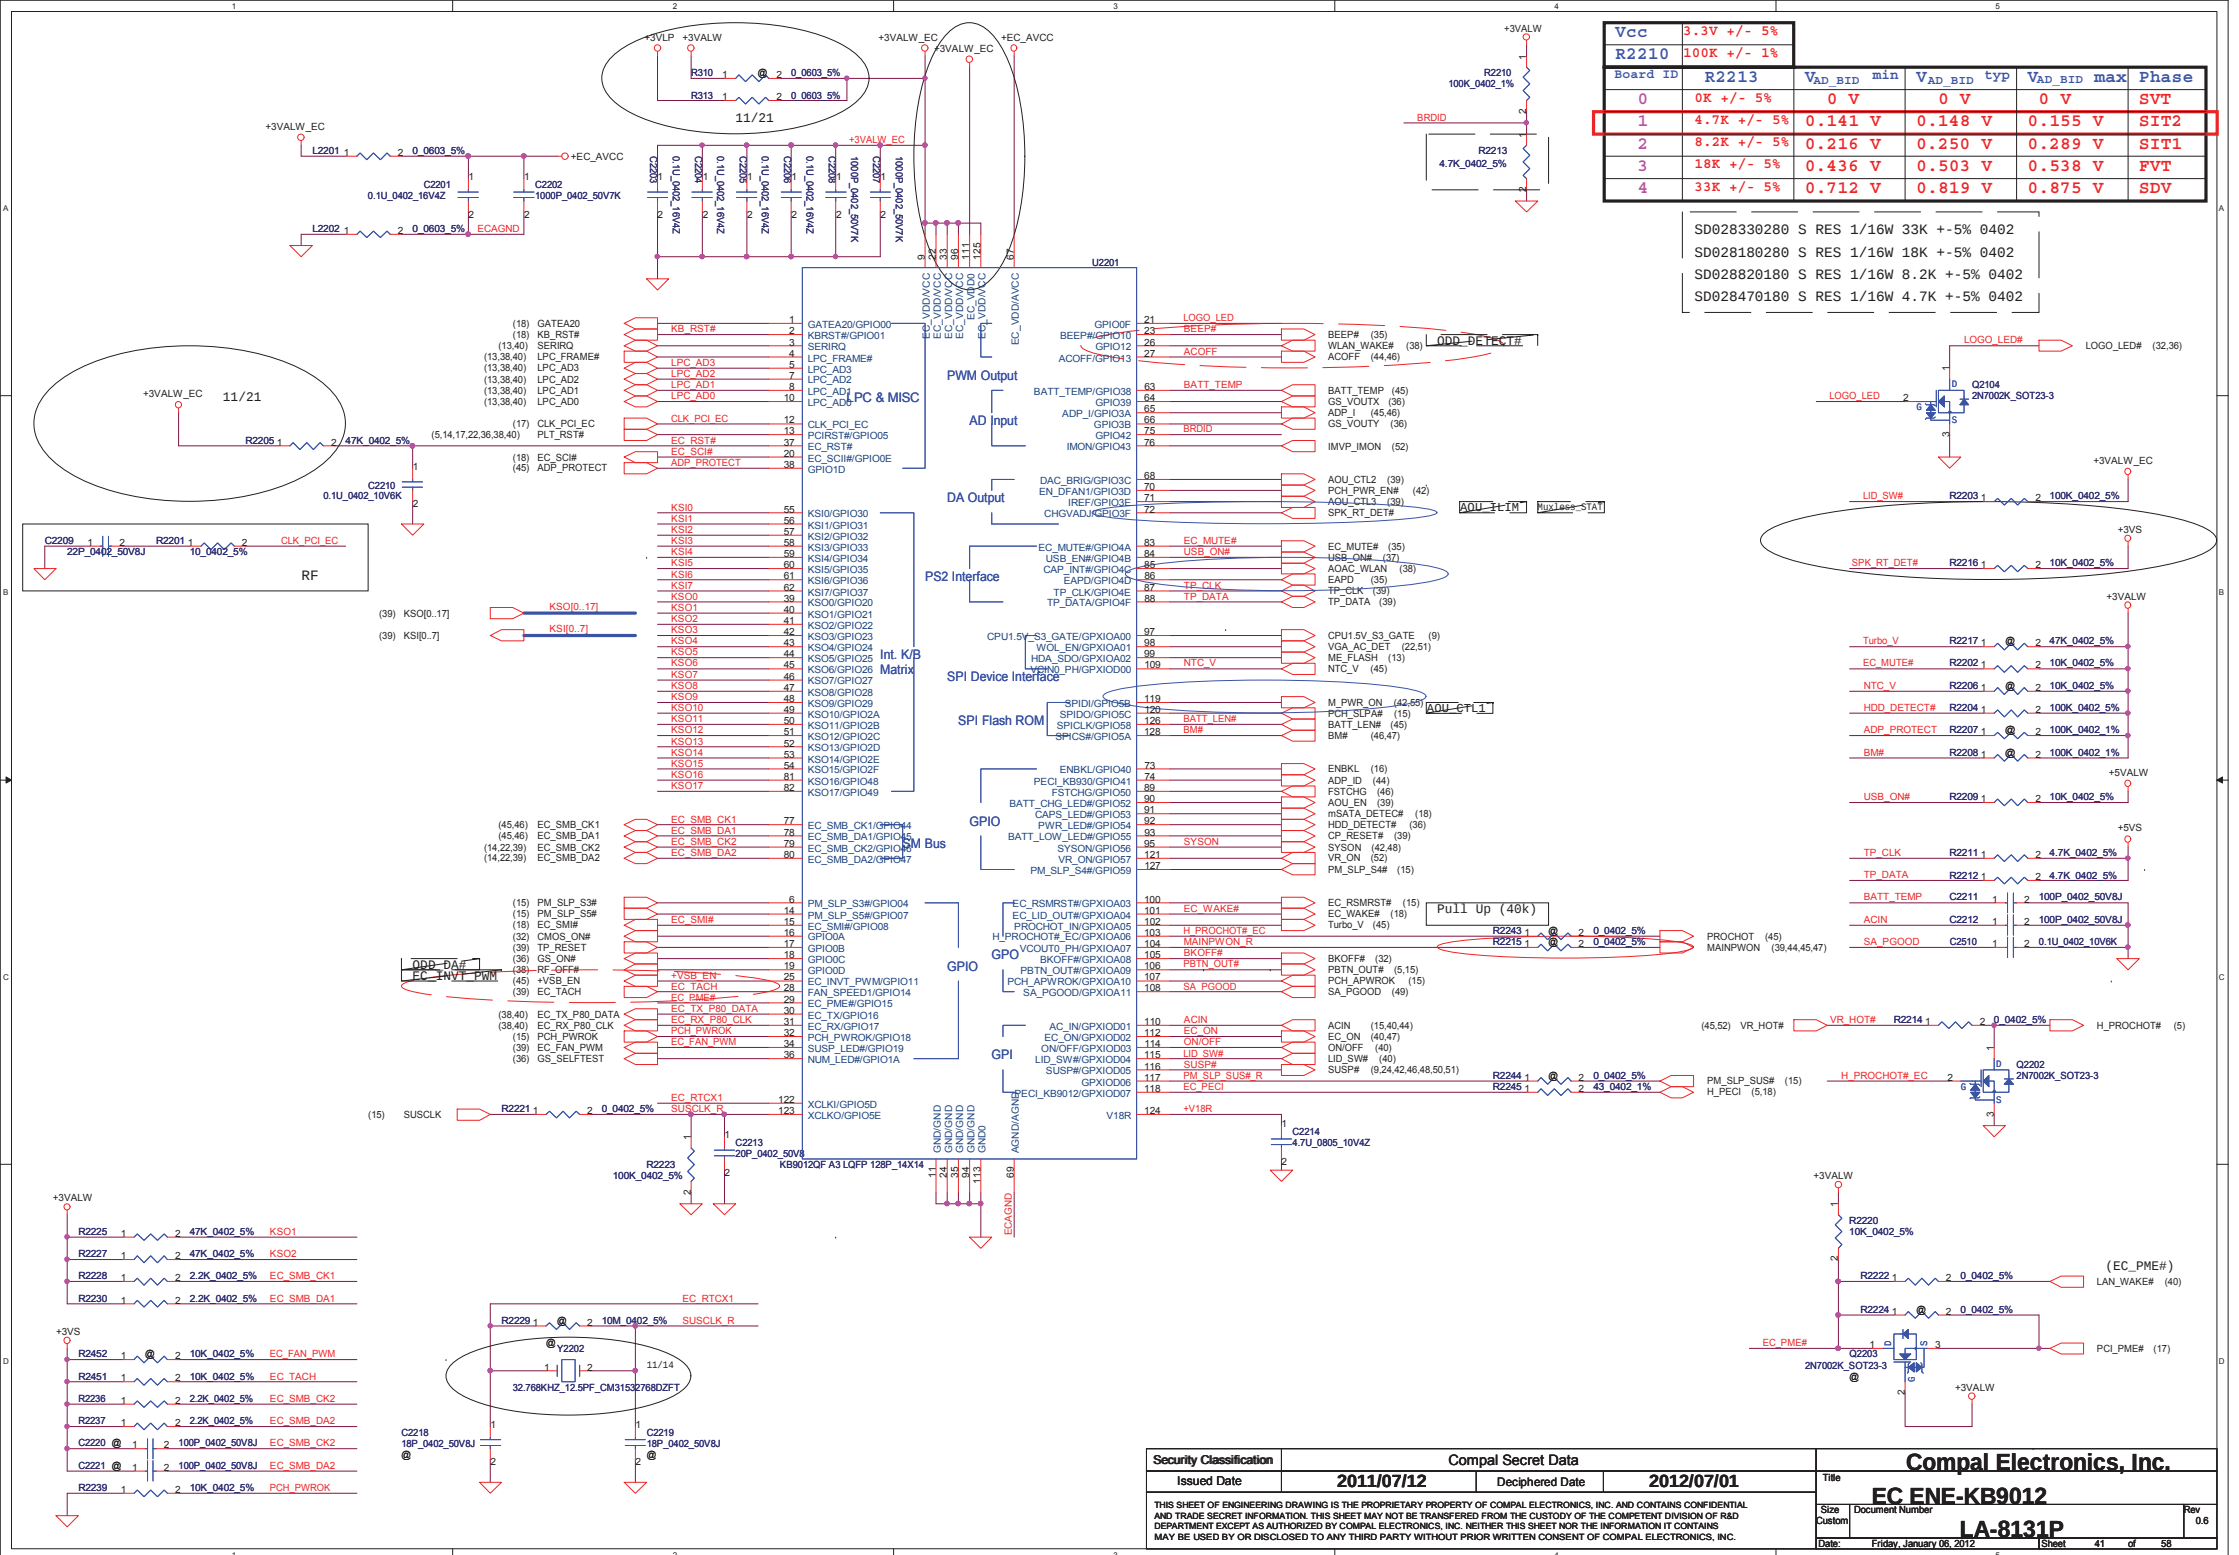


Security Classification		Compal Secret Data		Compal Electronics, Inc.		
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	EC ENE-KB9012	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RAD DEPARTMENT CREDIT AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Document Number	Rev
				Custom	LA-8131P	0.6
				Date:	Friday, January 06, 2012	Sheet 41 of 58


+5VALW TO +5VS

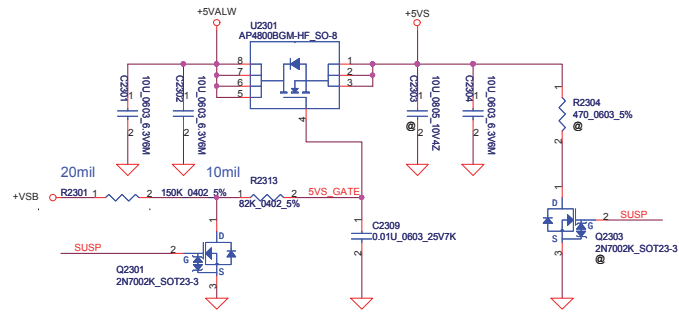

+3VALW TO +3VS


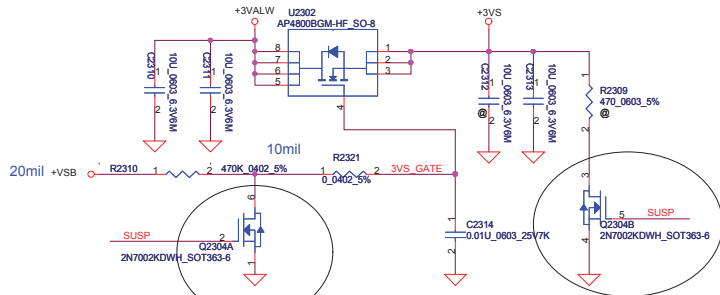


+1.5V to +1.5VS


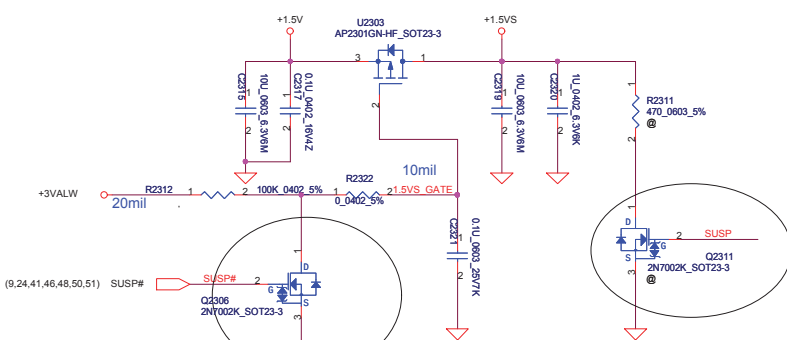


+3VALW TO +3VALW(PCH AUX Power)


Short J2301 for PCH VCCSUS3.3

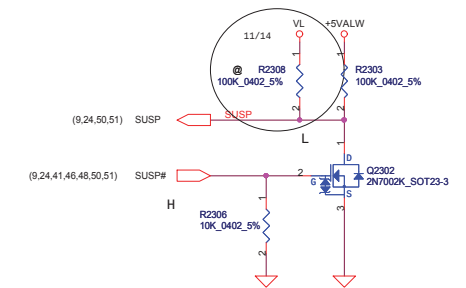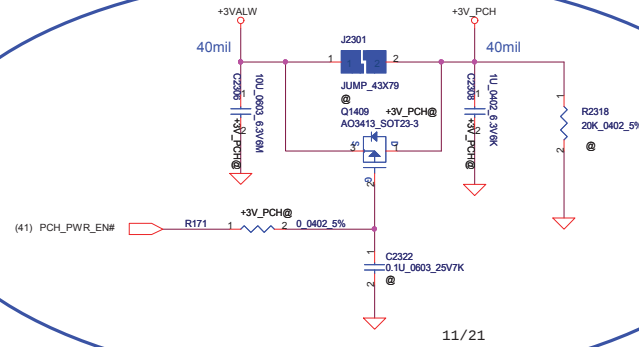


FOR SBA Function POWER(always mount)

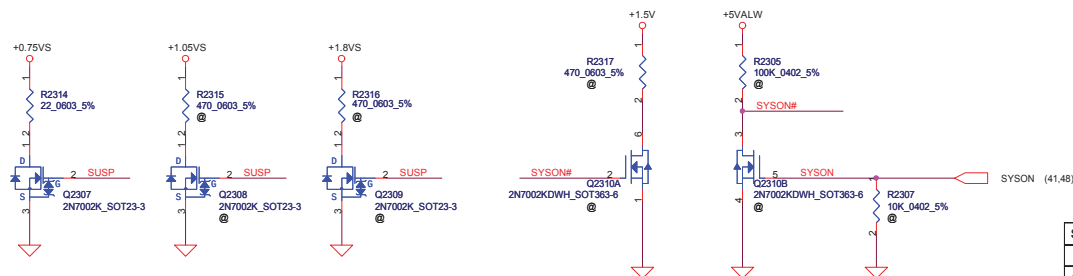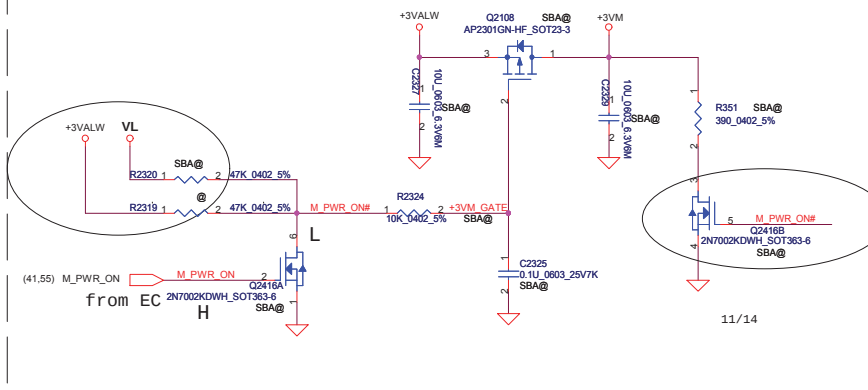

Security Classification		Compal Secret Data		Title	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Size	DC Interface
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	LA-8131P
				Date	Tuesday, January 10, 2012
				Sheet	42 of 58
				Rev	0.6

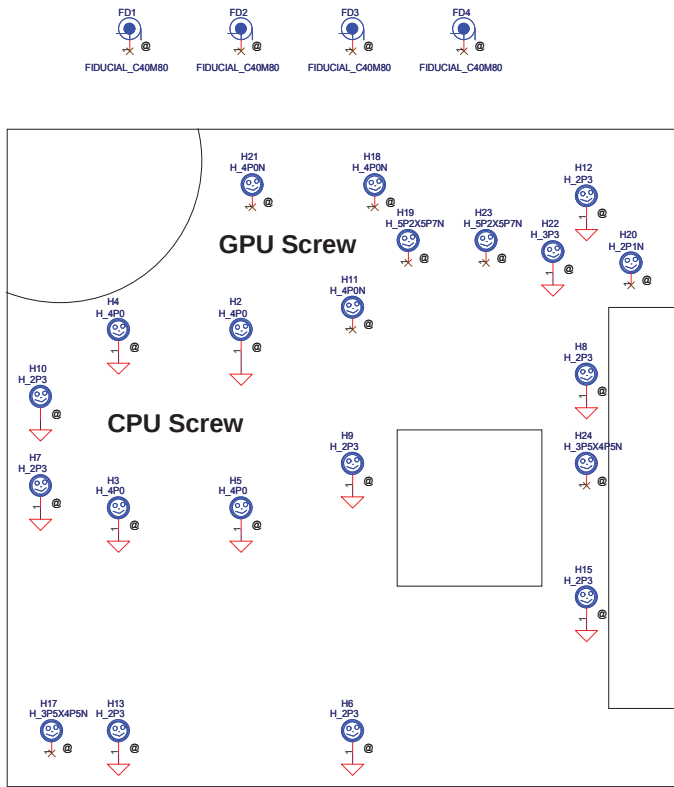

RTC
RTCRST
EC_111 pin
EC_ON
MAINPWON
+5VALW
+3VALW/VCCDSW
ON/OFF#
EC_RSMRST#
PBTN_OUT#
SLP_S5#
SLP_S4#
SYS0N
SYS0N
PCH_SLPA#
M_PWR_ON
+3VM
+1.05VM
PCH_APWROK
SLP_S3#
SUSP#
+1.5V_CPU_VDDQ
+1.8VS
+5VS
+3VS
+1.5VS
+0.75VS
+V1.05VS(VCCP)
+VCCSA
SA_P600D
VR_ON
PCH_P0K
PCH_CLKOUT
DRAMPWROK
H_CPUPWRGD
CPU_VID
CPU_CORE
VGATE
SYS_PWROK
BUF_PLT_RST#
SPI
DMI

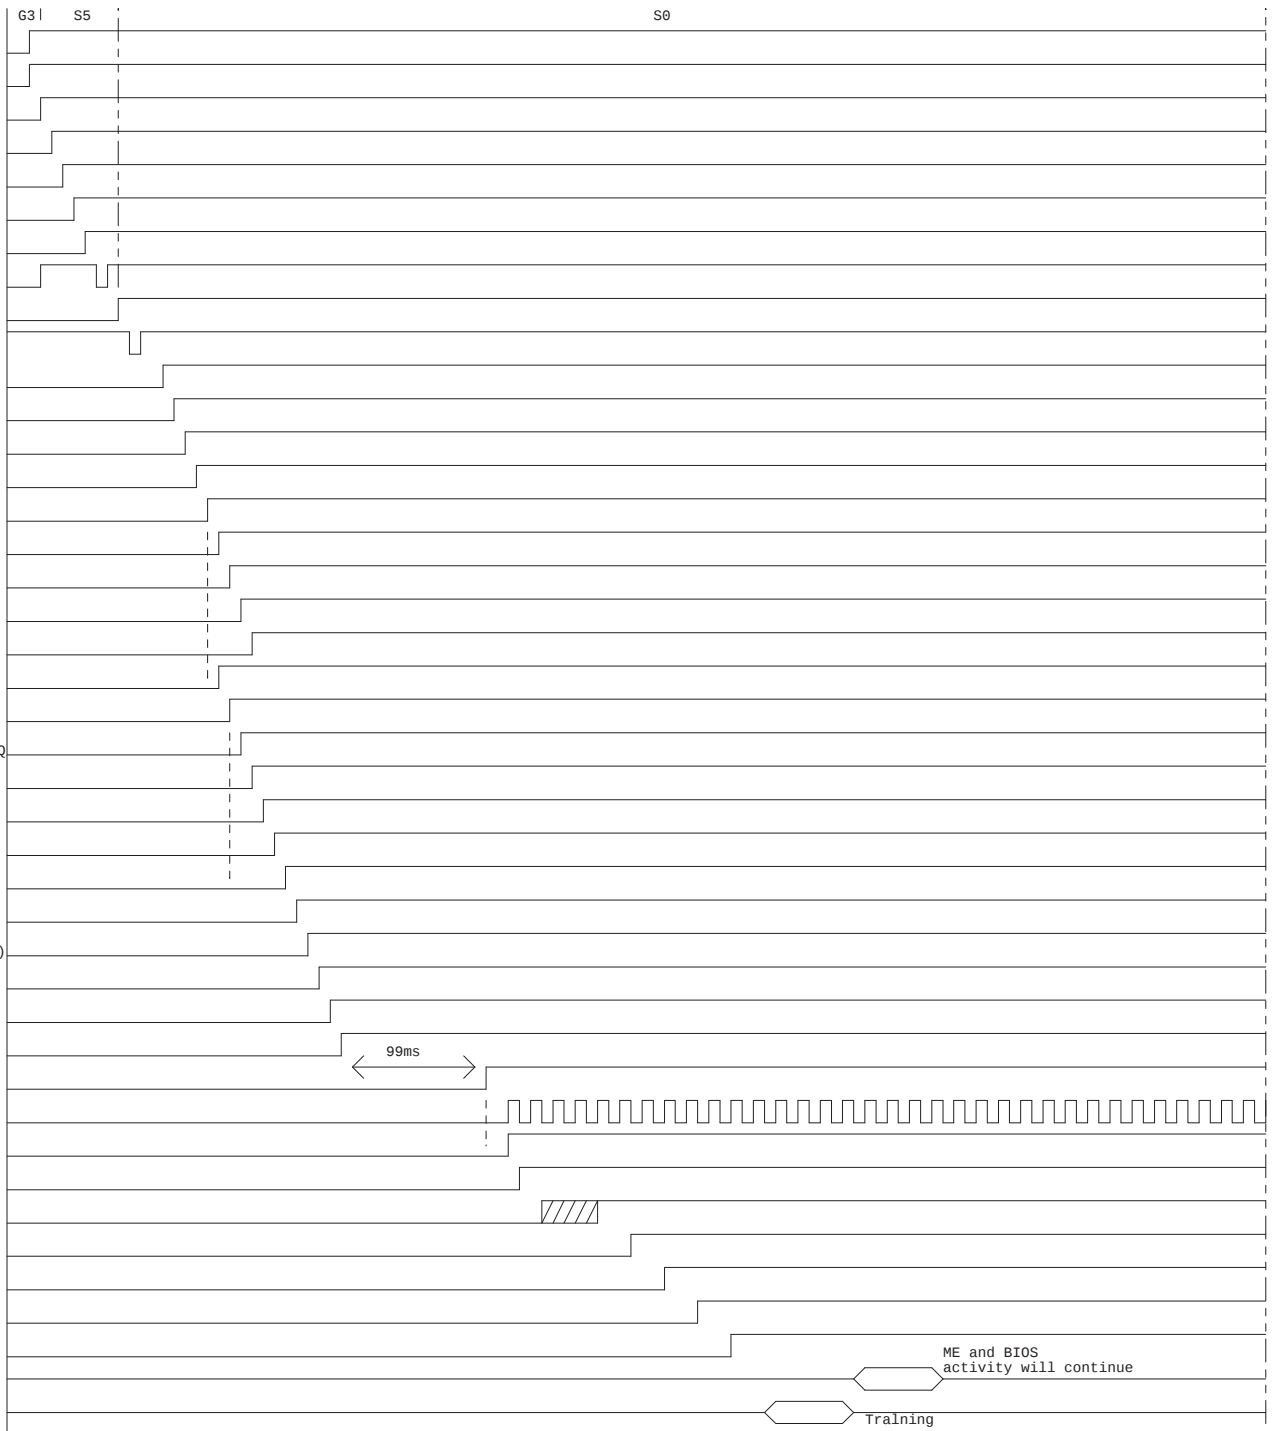

Security Classification		Compal Secret Data		Title	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Size	Document Number
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Custom	LA-8131P
				Date	Friday, January 08, 2012
				Sheet	43 of 58

ME and BIOS
activity will continue






Tralning

Compal Electronics, Inc.

Screw Hole

LA-8131P

Rev
0.6

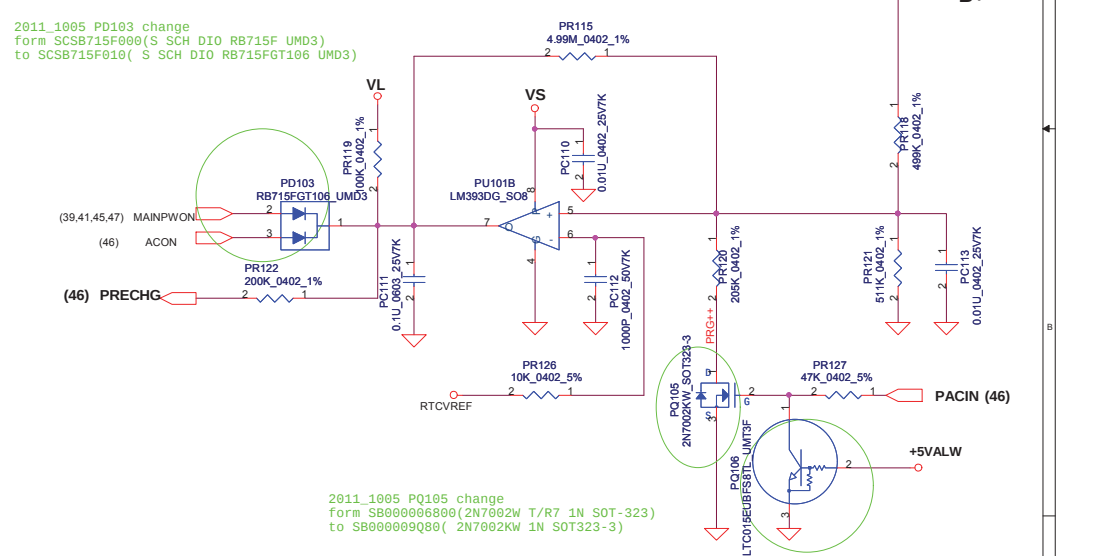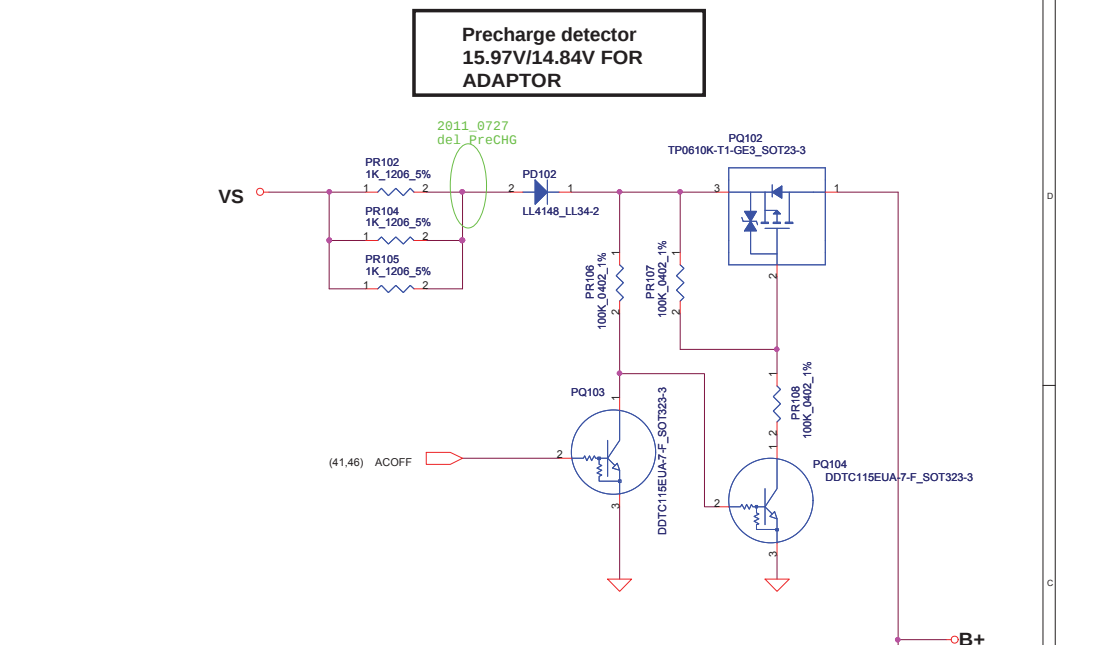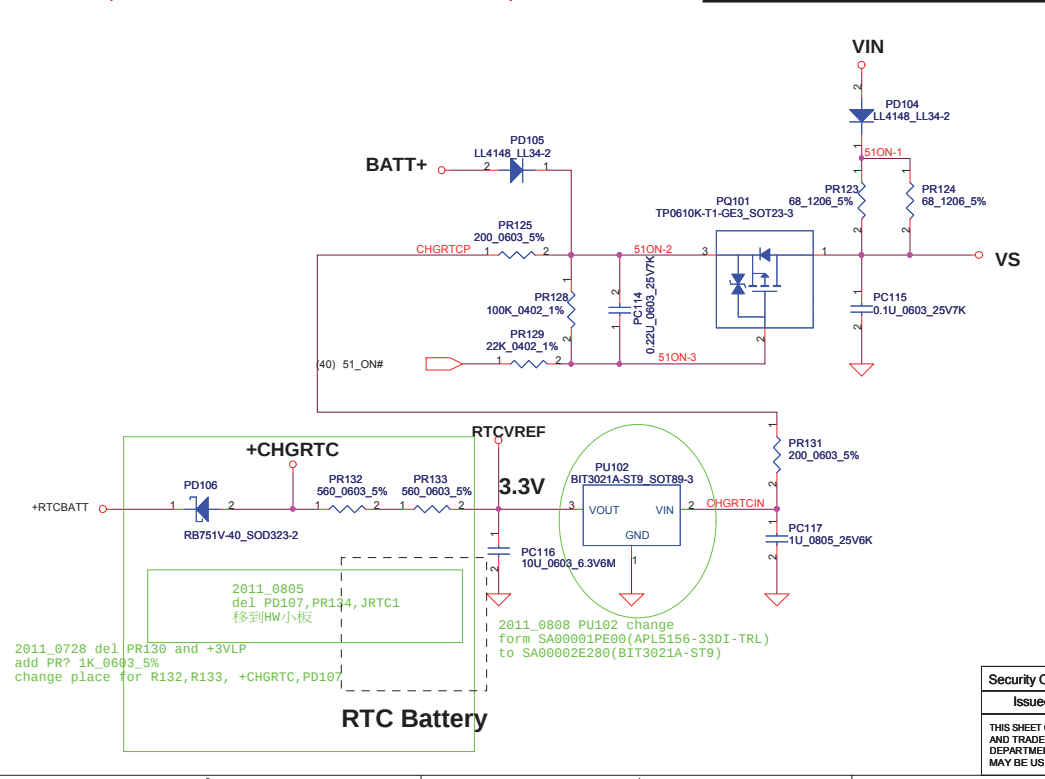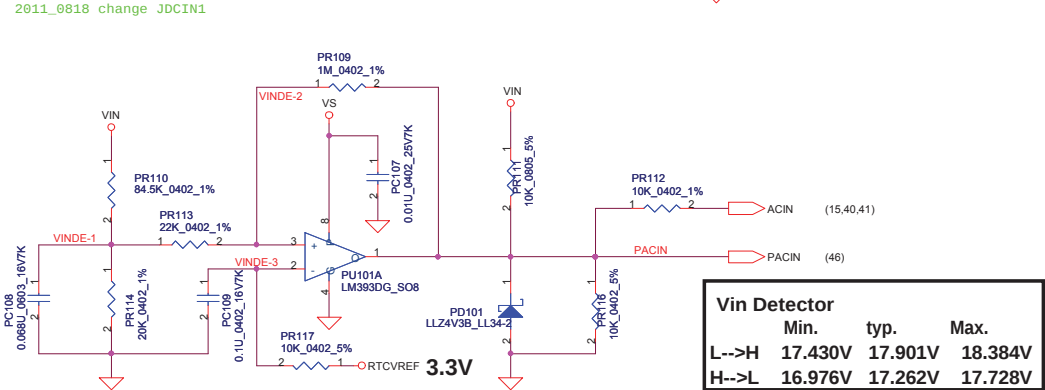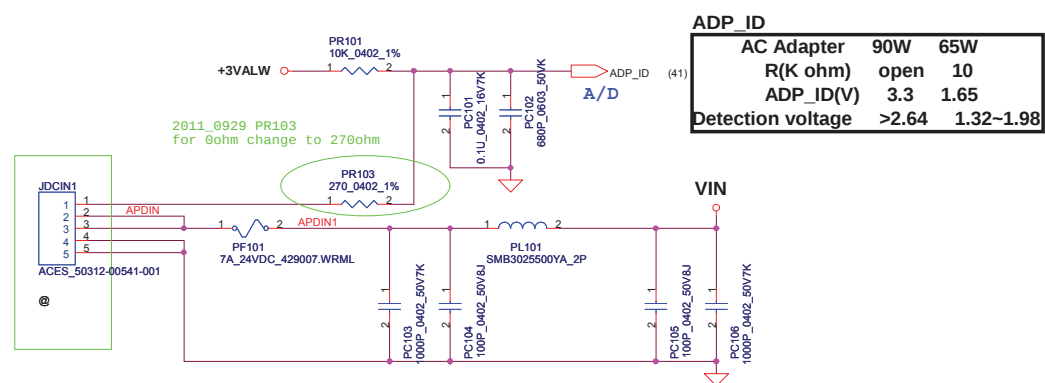

ACIN

Precharge detector			
	Min.	typ.	Max.
L-->H	14.991V	15.381V	15.782V
H-->L	13.860V	14.247V	14.621V


BATT ONLY

Precharge detector			
	Min.	typ.	Max.
L-->H	7.196V	7.349V	7.505V
H-->L	6.138V	6.214V	6.056V



For KB930 --> Keep PU201 circuit
($V_{th} = 1.25V$)


For KB9012 (Red square) --> Remove PU201 circuit, but keep PR206
PH201, PR205, PR211, PQ201, PR208, PR212

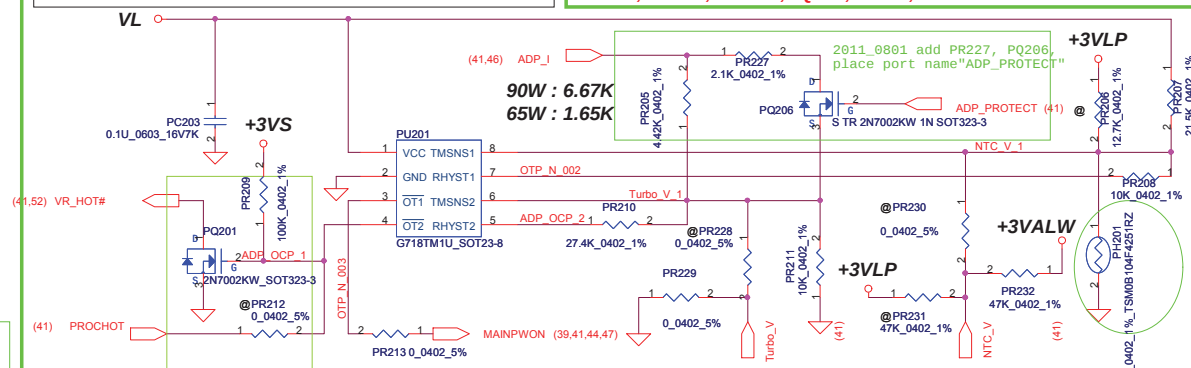

2011_1119
Change PQ201,PR209,PR212 to mount from unmount


2011_0808
PR227,PQ206
change place

```
2011_1005
PH201 form SL200000V00
100K +-1% NCP15WF104F03RC 0402
change to SL200000U00
100K +-1% TSM0B104F4251RZ 0402
```

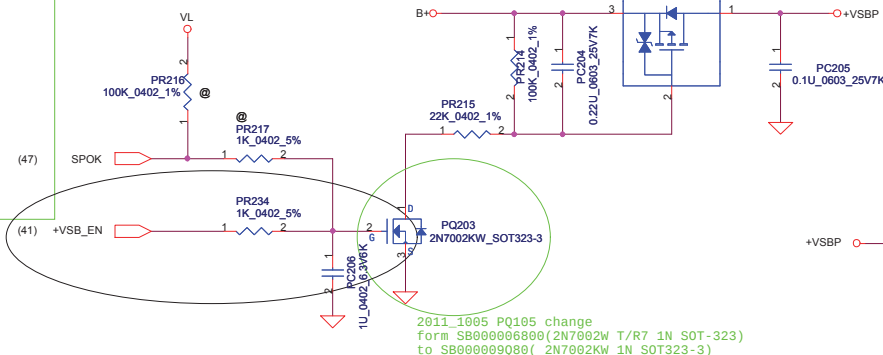


2011_1005 PQ105 change
form SB000006800(2N7002W T/R7 1N S0T-323)
to SB000009080(2N7002KW 1N S0T323-3)

Security Classification	Compal Secret Data			Compal Electronics, Inc. PWR-BATTERY CONN/OTP		
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title		
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Document Number	Rev
				Custom	LA-8133P	0.0
				Date:	Tuesday, January 10, 2012	Sheet 45 of 58




THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.


Note:
Use TPS51125 IC can remove RTC refernece LDO
Use TPS51427 IC must keep RTC refernece LDO

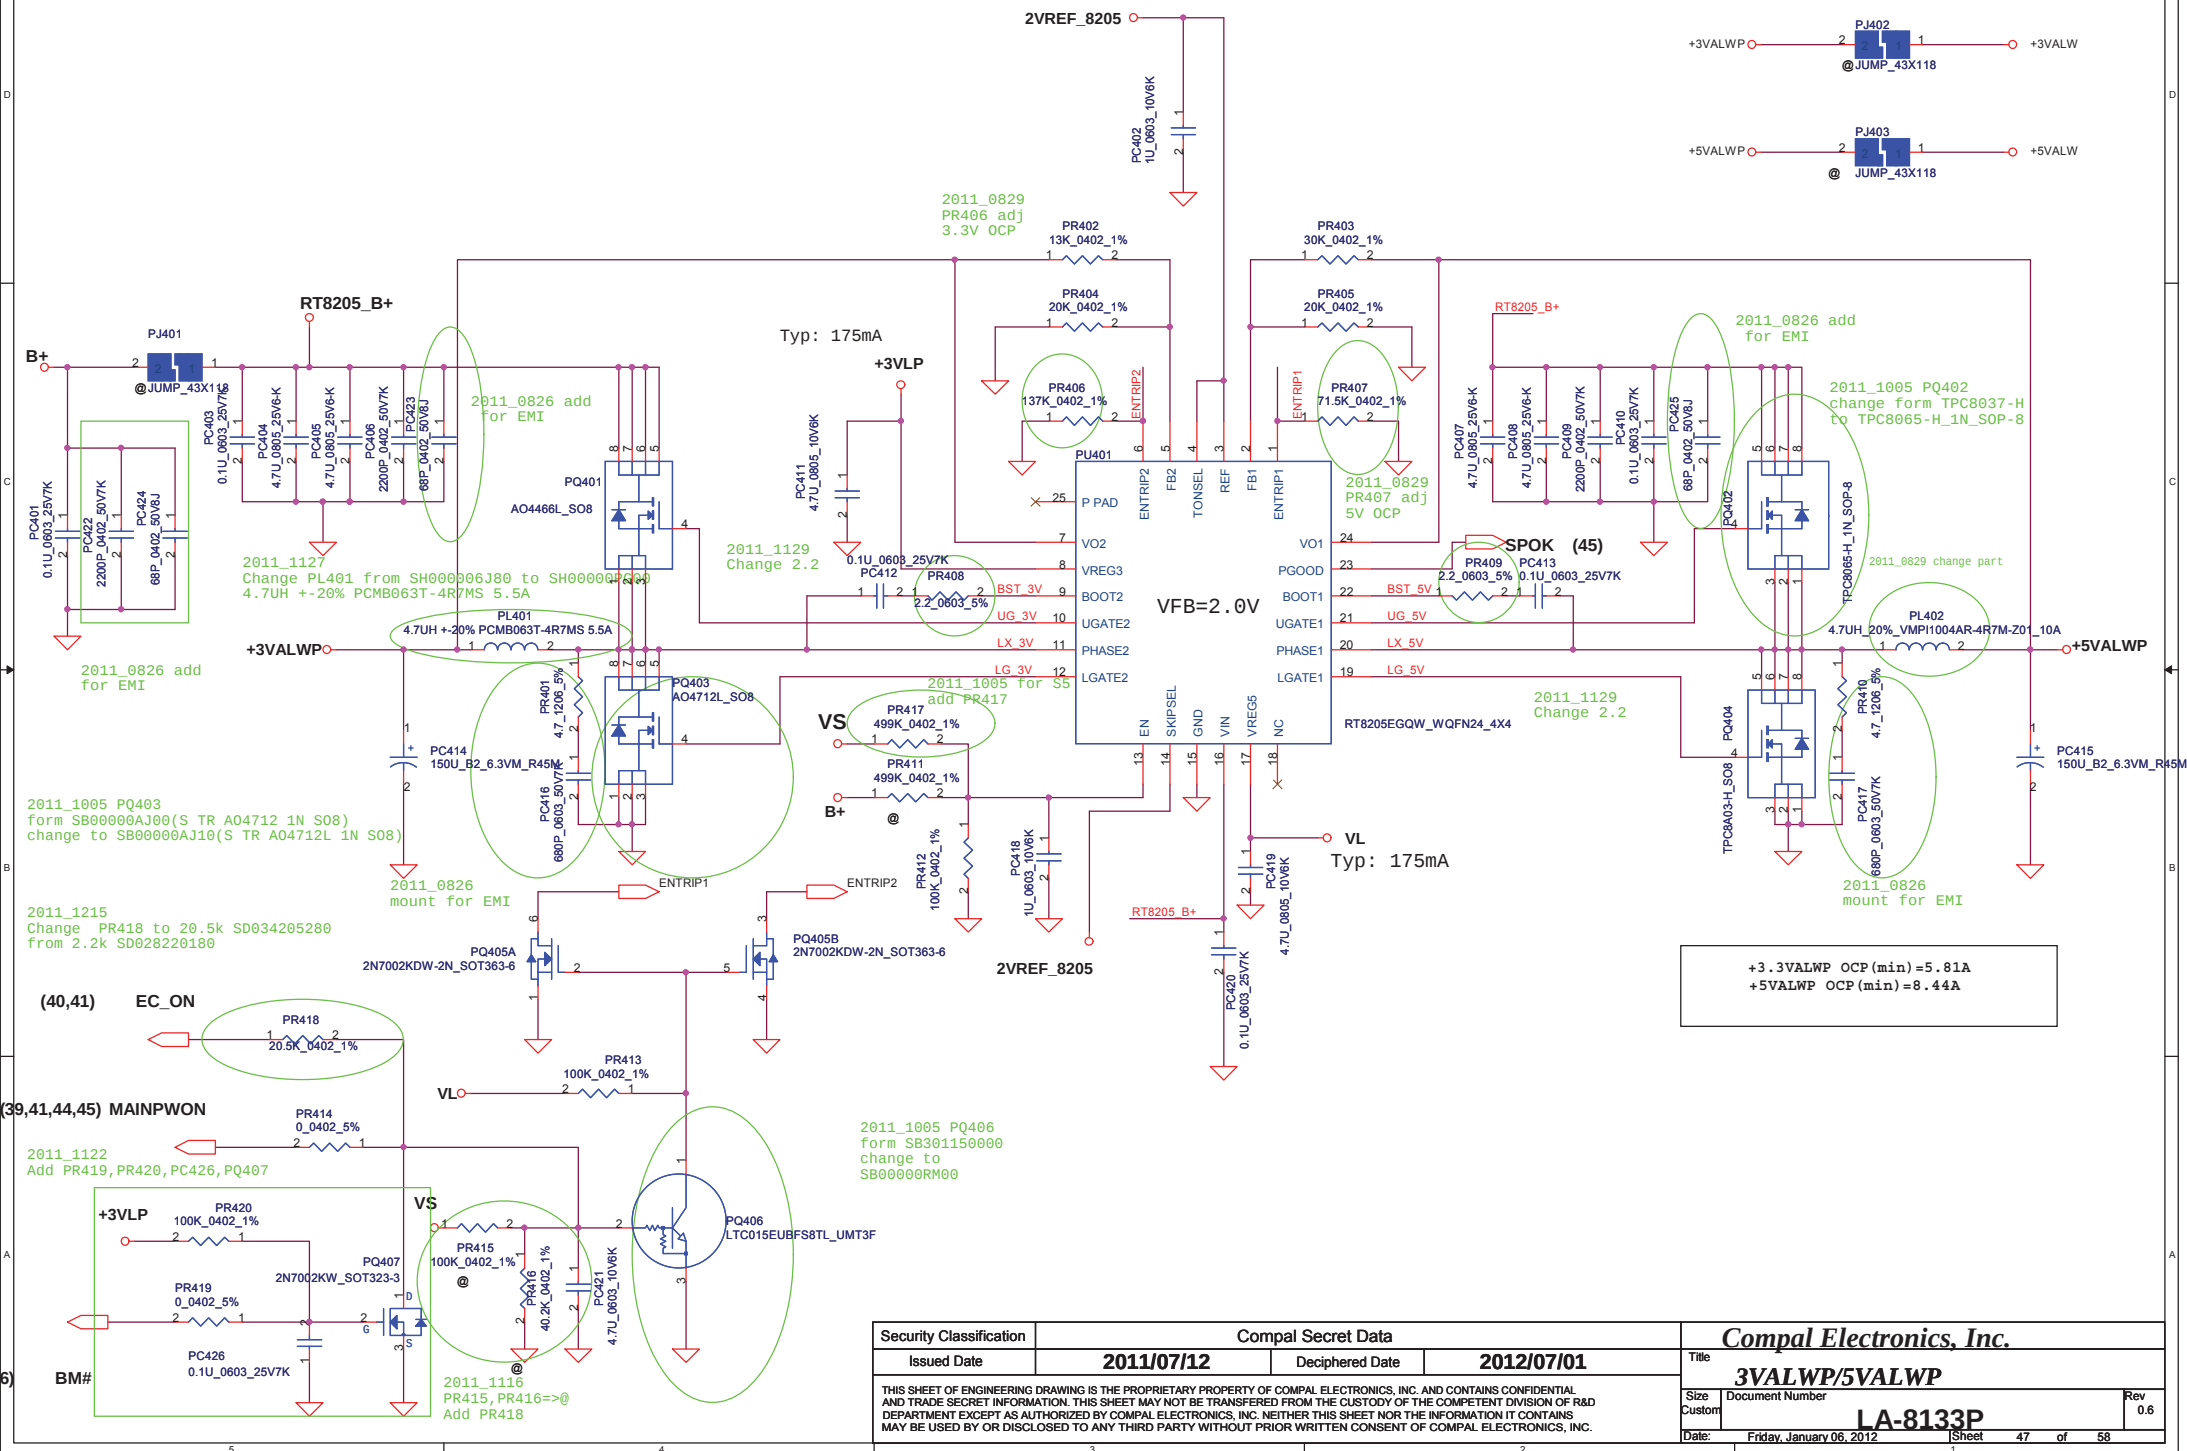

VID [0]	VID[1]	VCCSA Vout
0	0	0.9V
0	1	0.8V
1	0	0.725V
1	1	0.675V

output voltage adjustable network

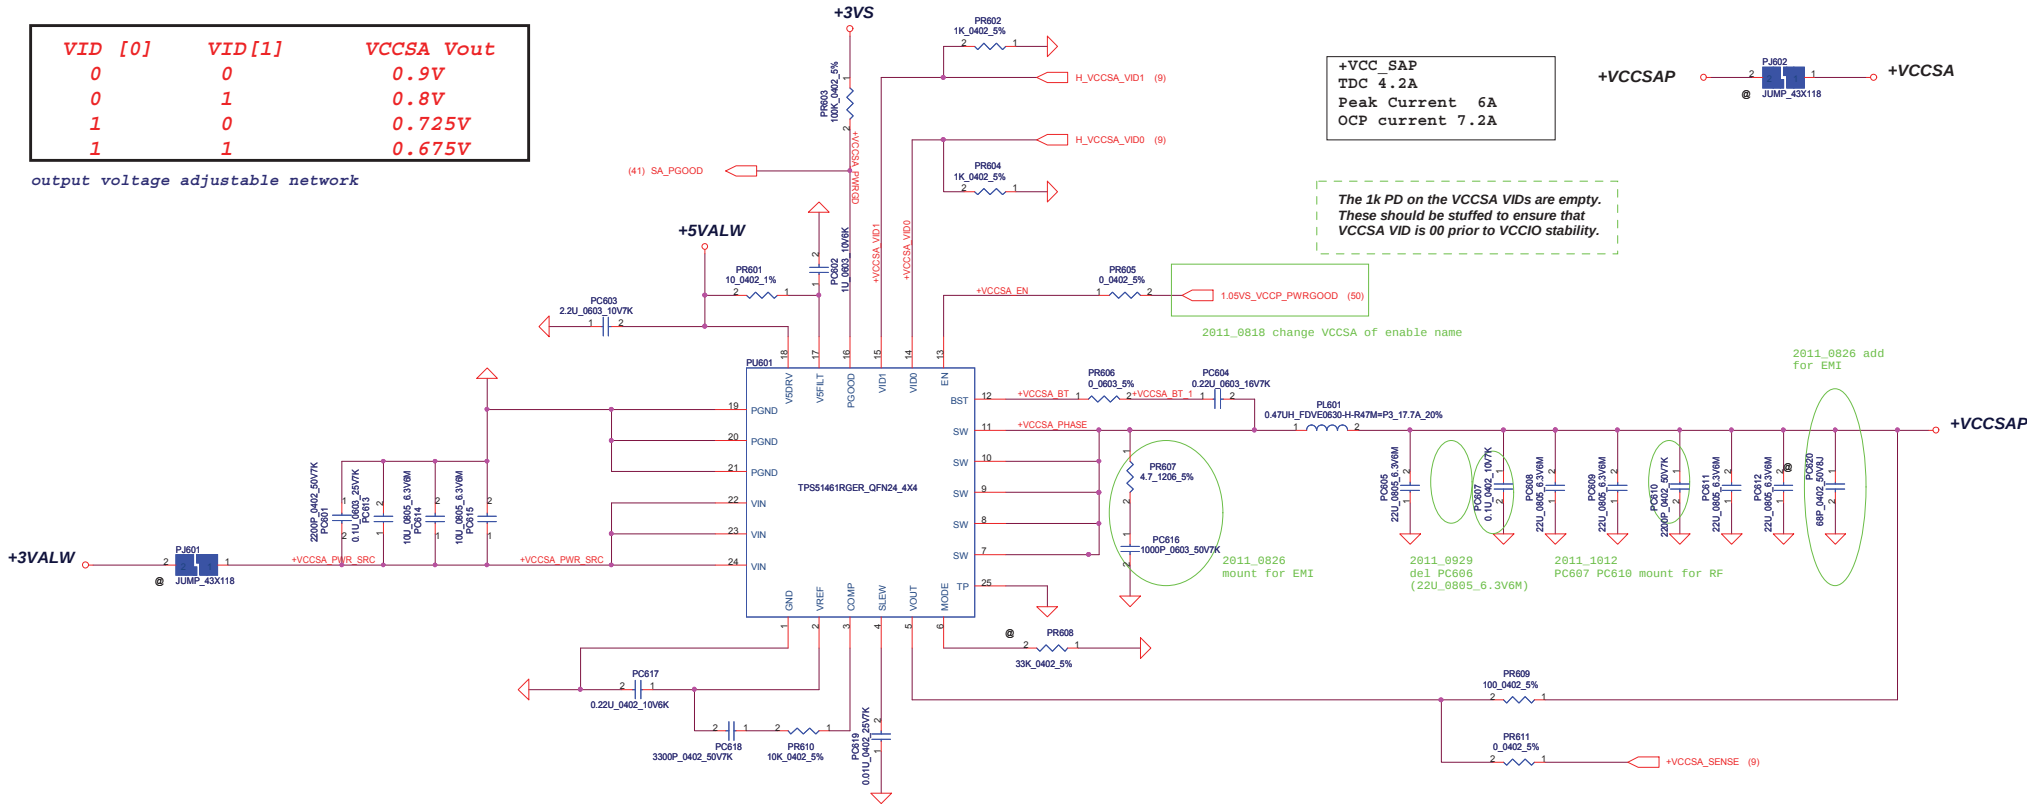

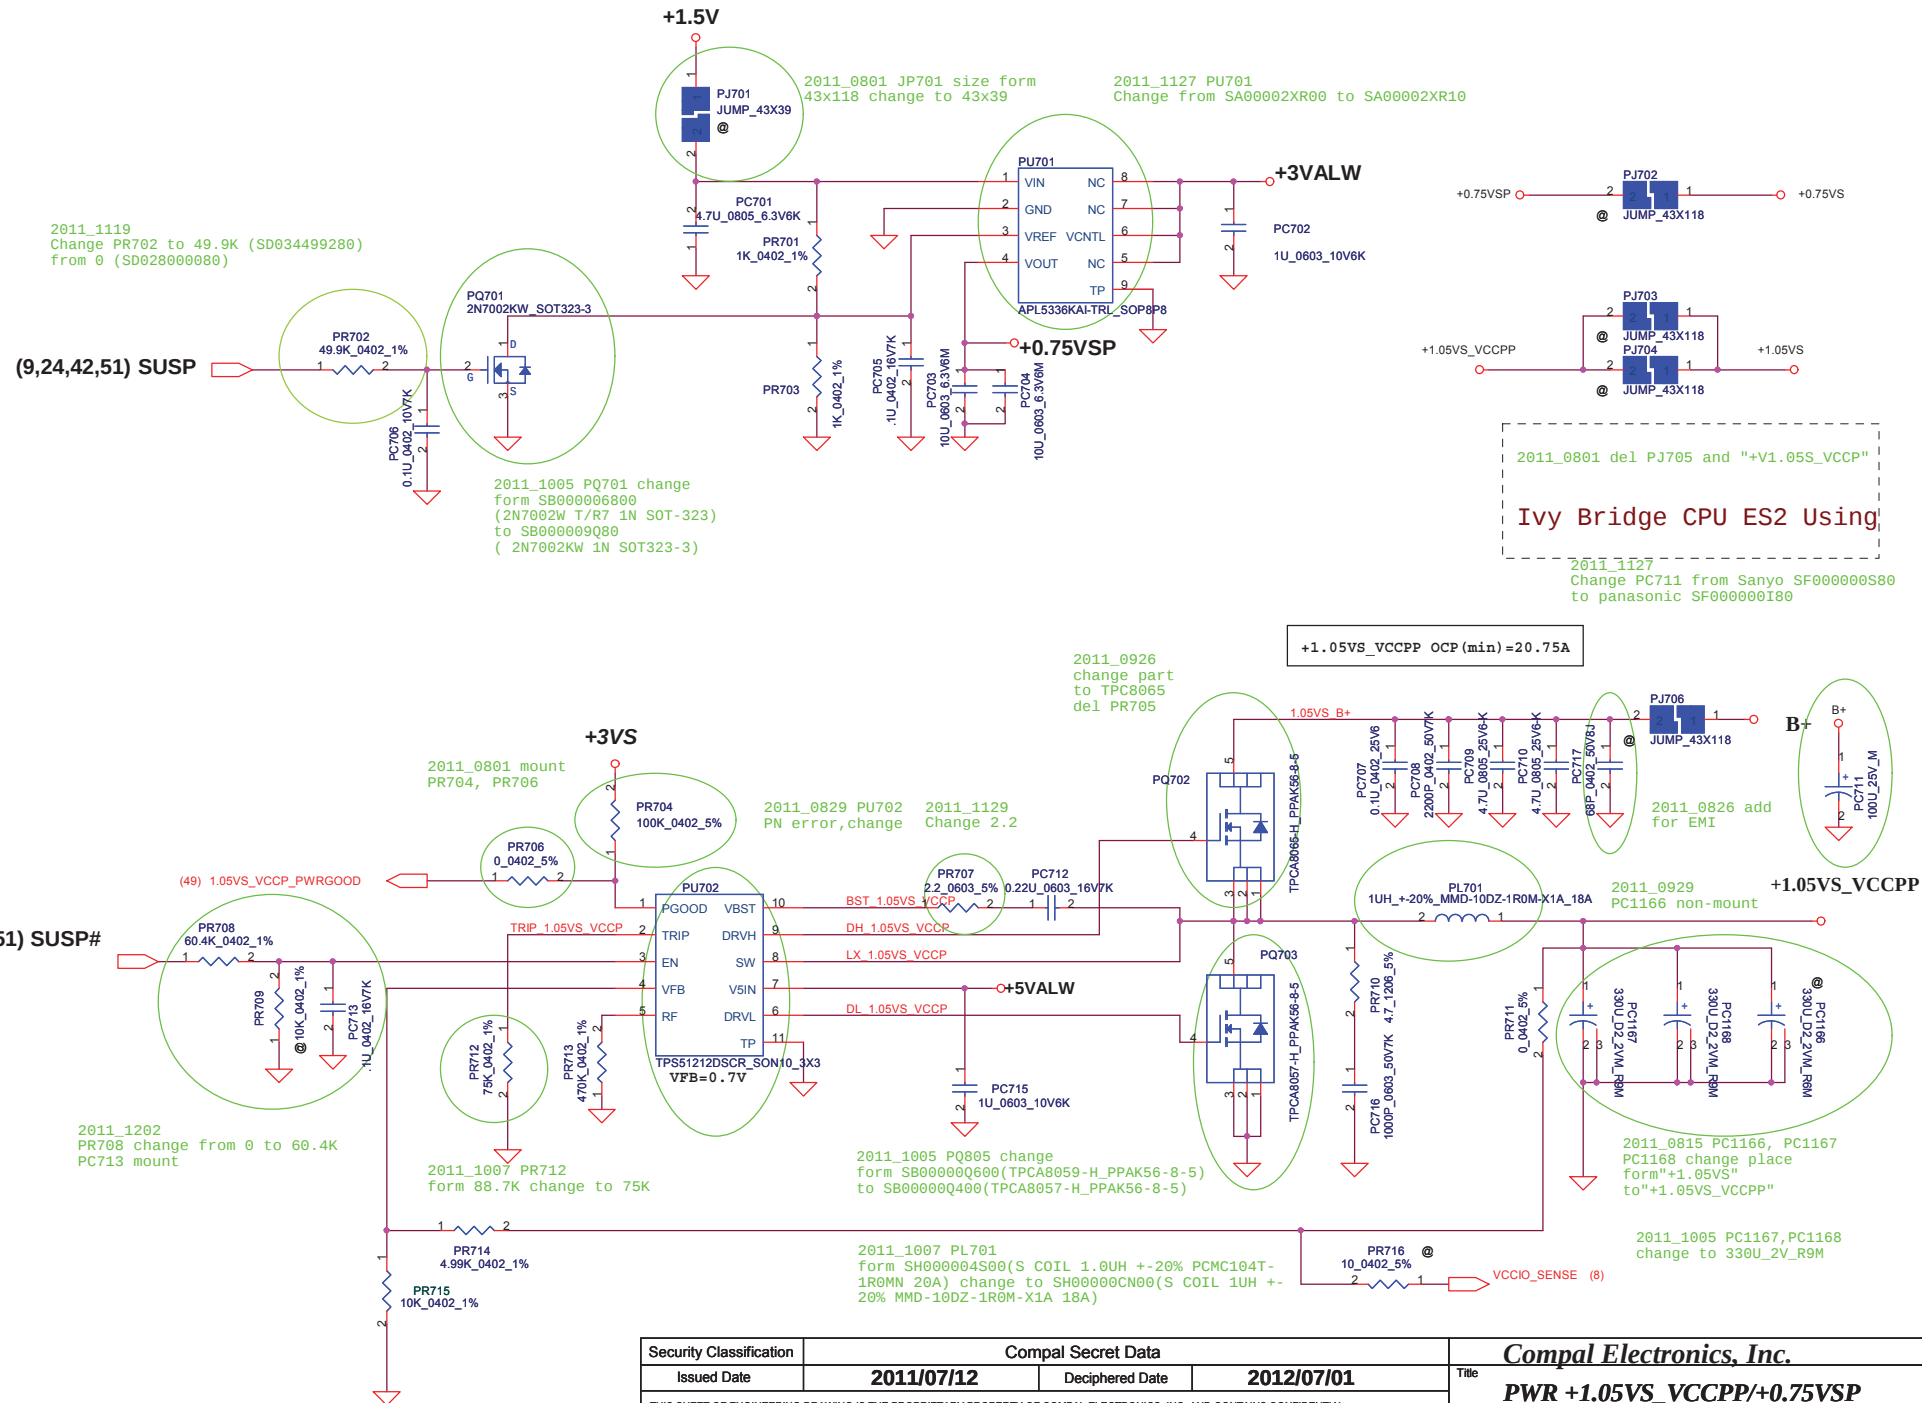

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	PWR +1.05VS_VCCPP/+0.75VSP
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Document Number
				Custom	Rev 0.6
				Date	Friday, January 06, 2012
				Sheet	50 of 58

Option for
1 phase GFX



A circuit diagram showing a +5VS power source connected to a resistor labeled PR920 0_0402 5%. The other end of the resistor is connected to a terminal labeled CSP2A.



3Phase: @
1Phase: install

Option for
2 phase CPU




A circuit diagram showing a +5VS power source connected to a resistor labeled PR935 0_0402 5%. The other end of the resistor is connected to a terminal labeled CSP3.

3Phase: @
2Phase: install

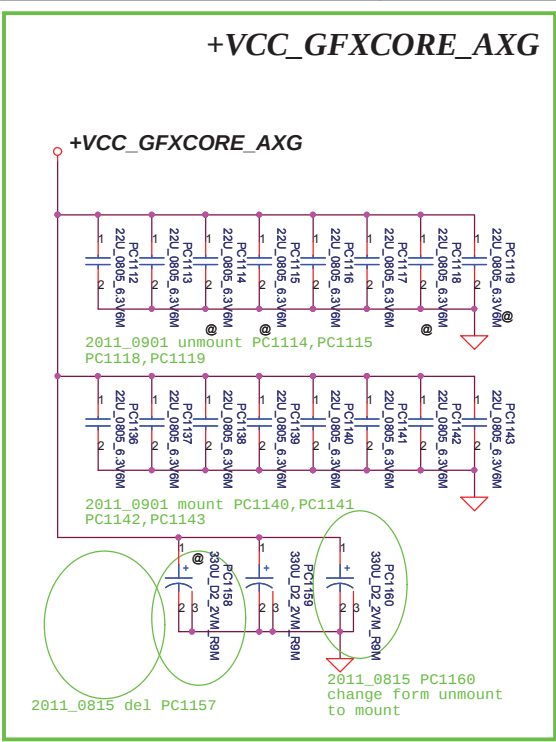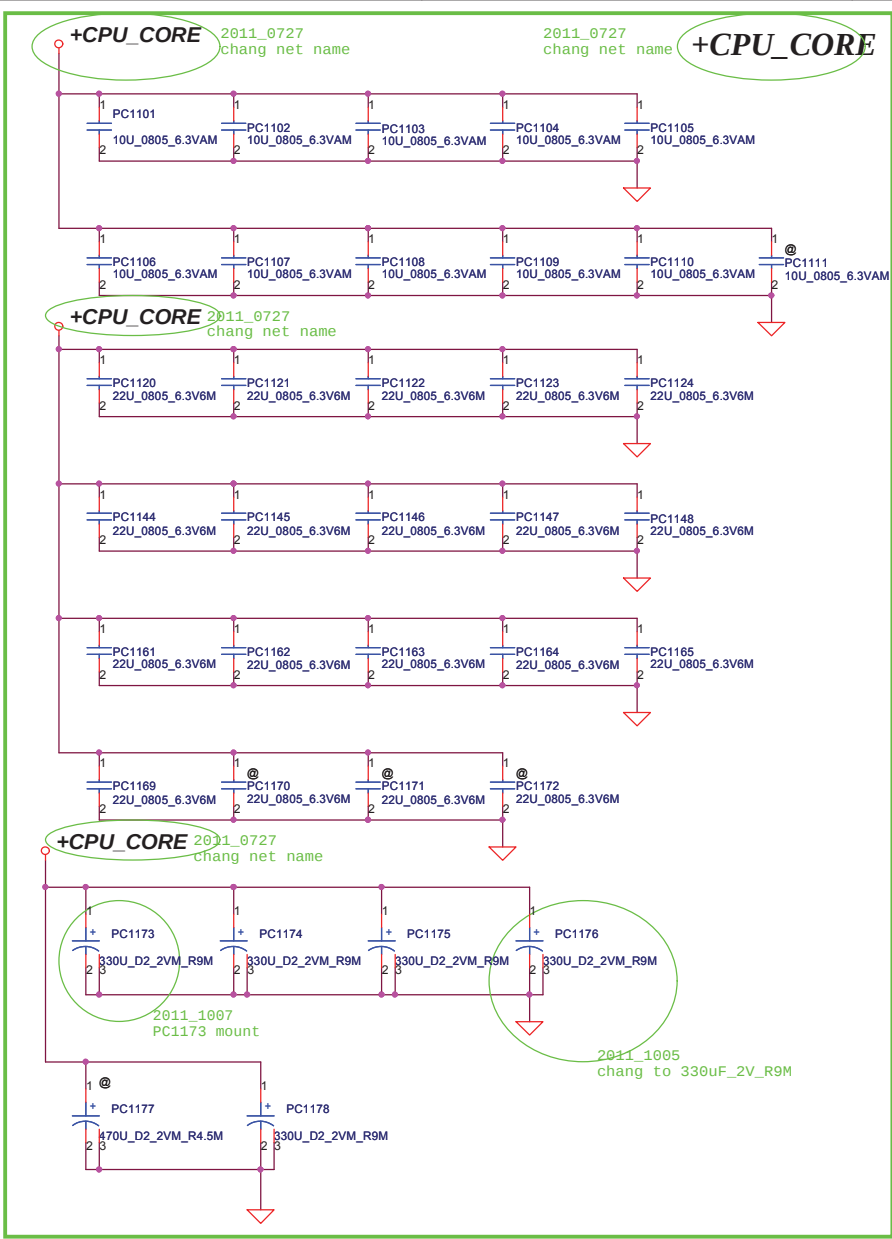

Below is 458544_CRV_PDDG_0.5 Table 5-8.

Socket Bottom	5 x 22 μ F (0805) 5 x (0805) no-stuff sites
Socket Top	7 x 22 μ F (0805) 2 x (0805) no-stuff sites

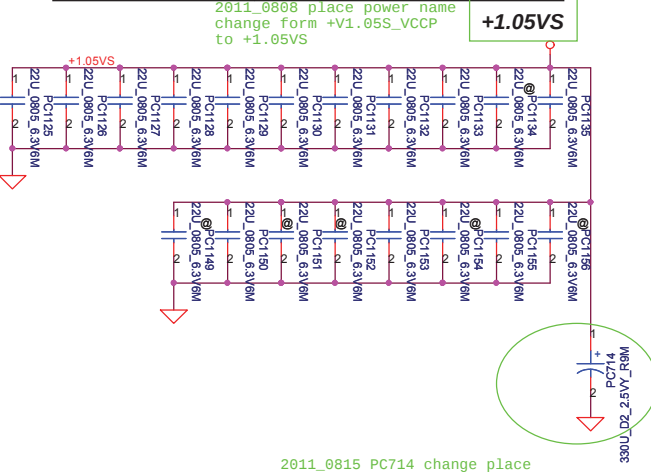


2011_0815 PC714 change place form "+1.05VS_VCCPP" to "+1.05VS"

2011_1005 PC714 change to 330uF_2V_R9M

2011_1007 PC714 form SGA00001Q802 (S POLY C 330U 2V M X LESR6M SX H1.9) change to SGA00002680 (330U_D2_2.5VY_R9M)

2011_0923 JUMP form 43X79 change to 43X79

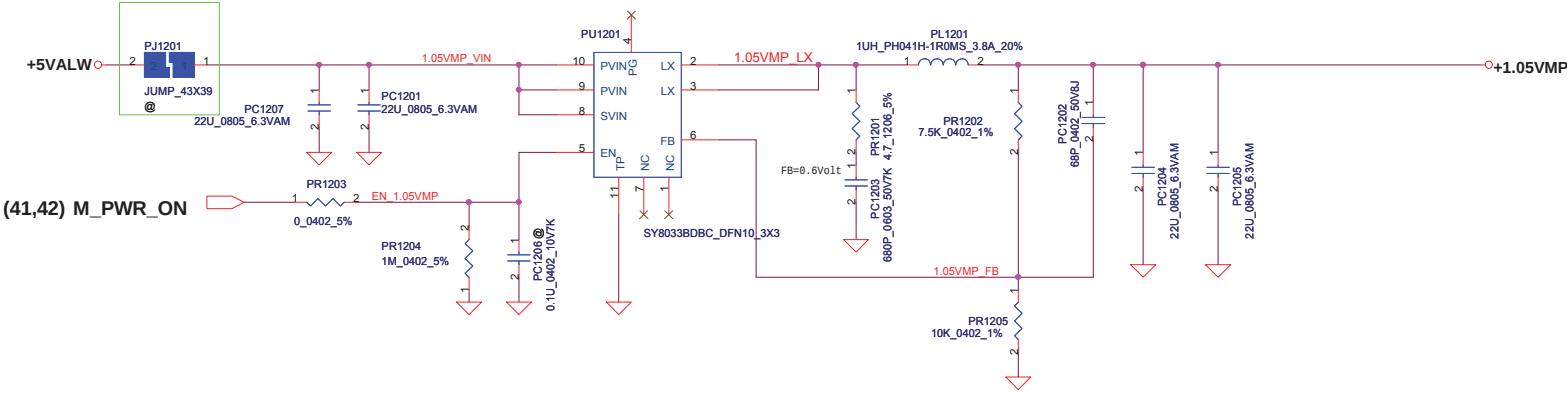


(41,42) M_PWR_ON



1.05VMP max current=1A

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date		2011/07/12	Deciphered Date	2012/07/01	Title
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.		PWR-+1.05VMP		Size	Rev
				Custom	0.6
				Document Number	LA-8133P
				Date:	Friday, January 06, 2012
				Sheet	55 of 58

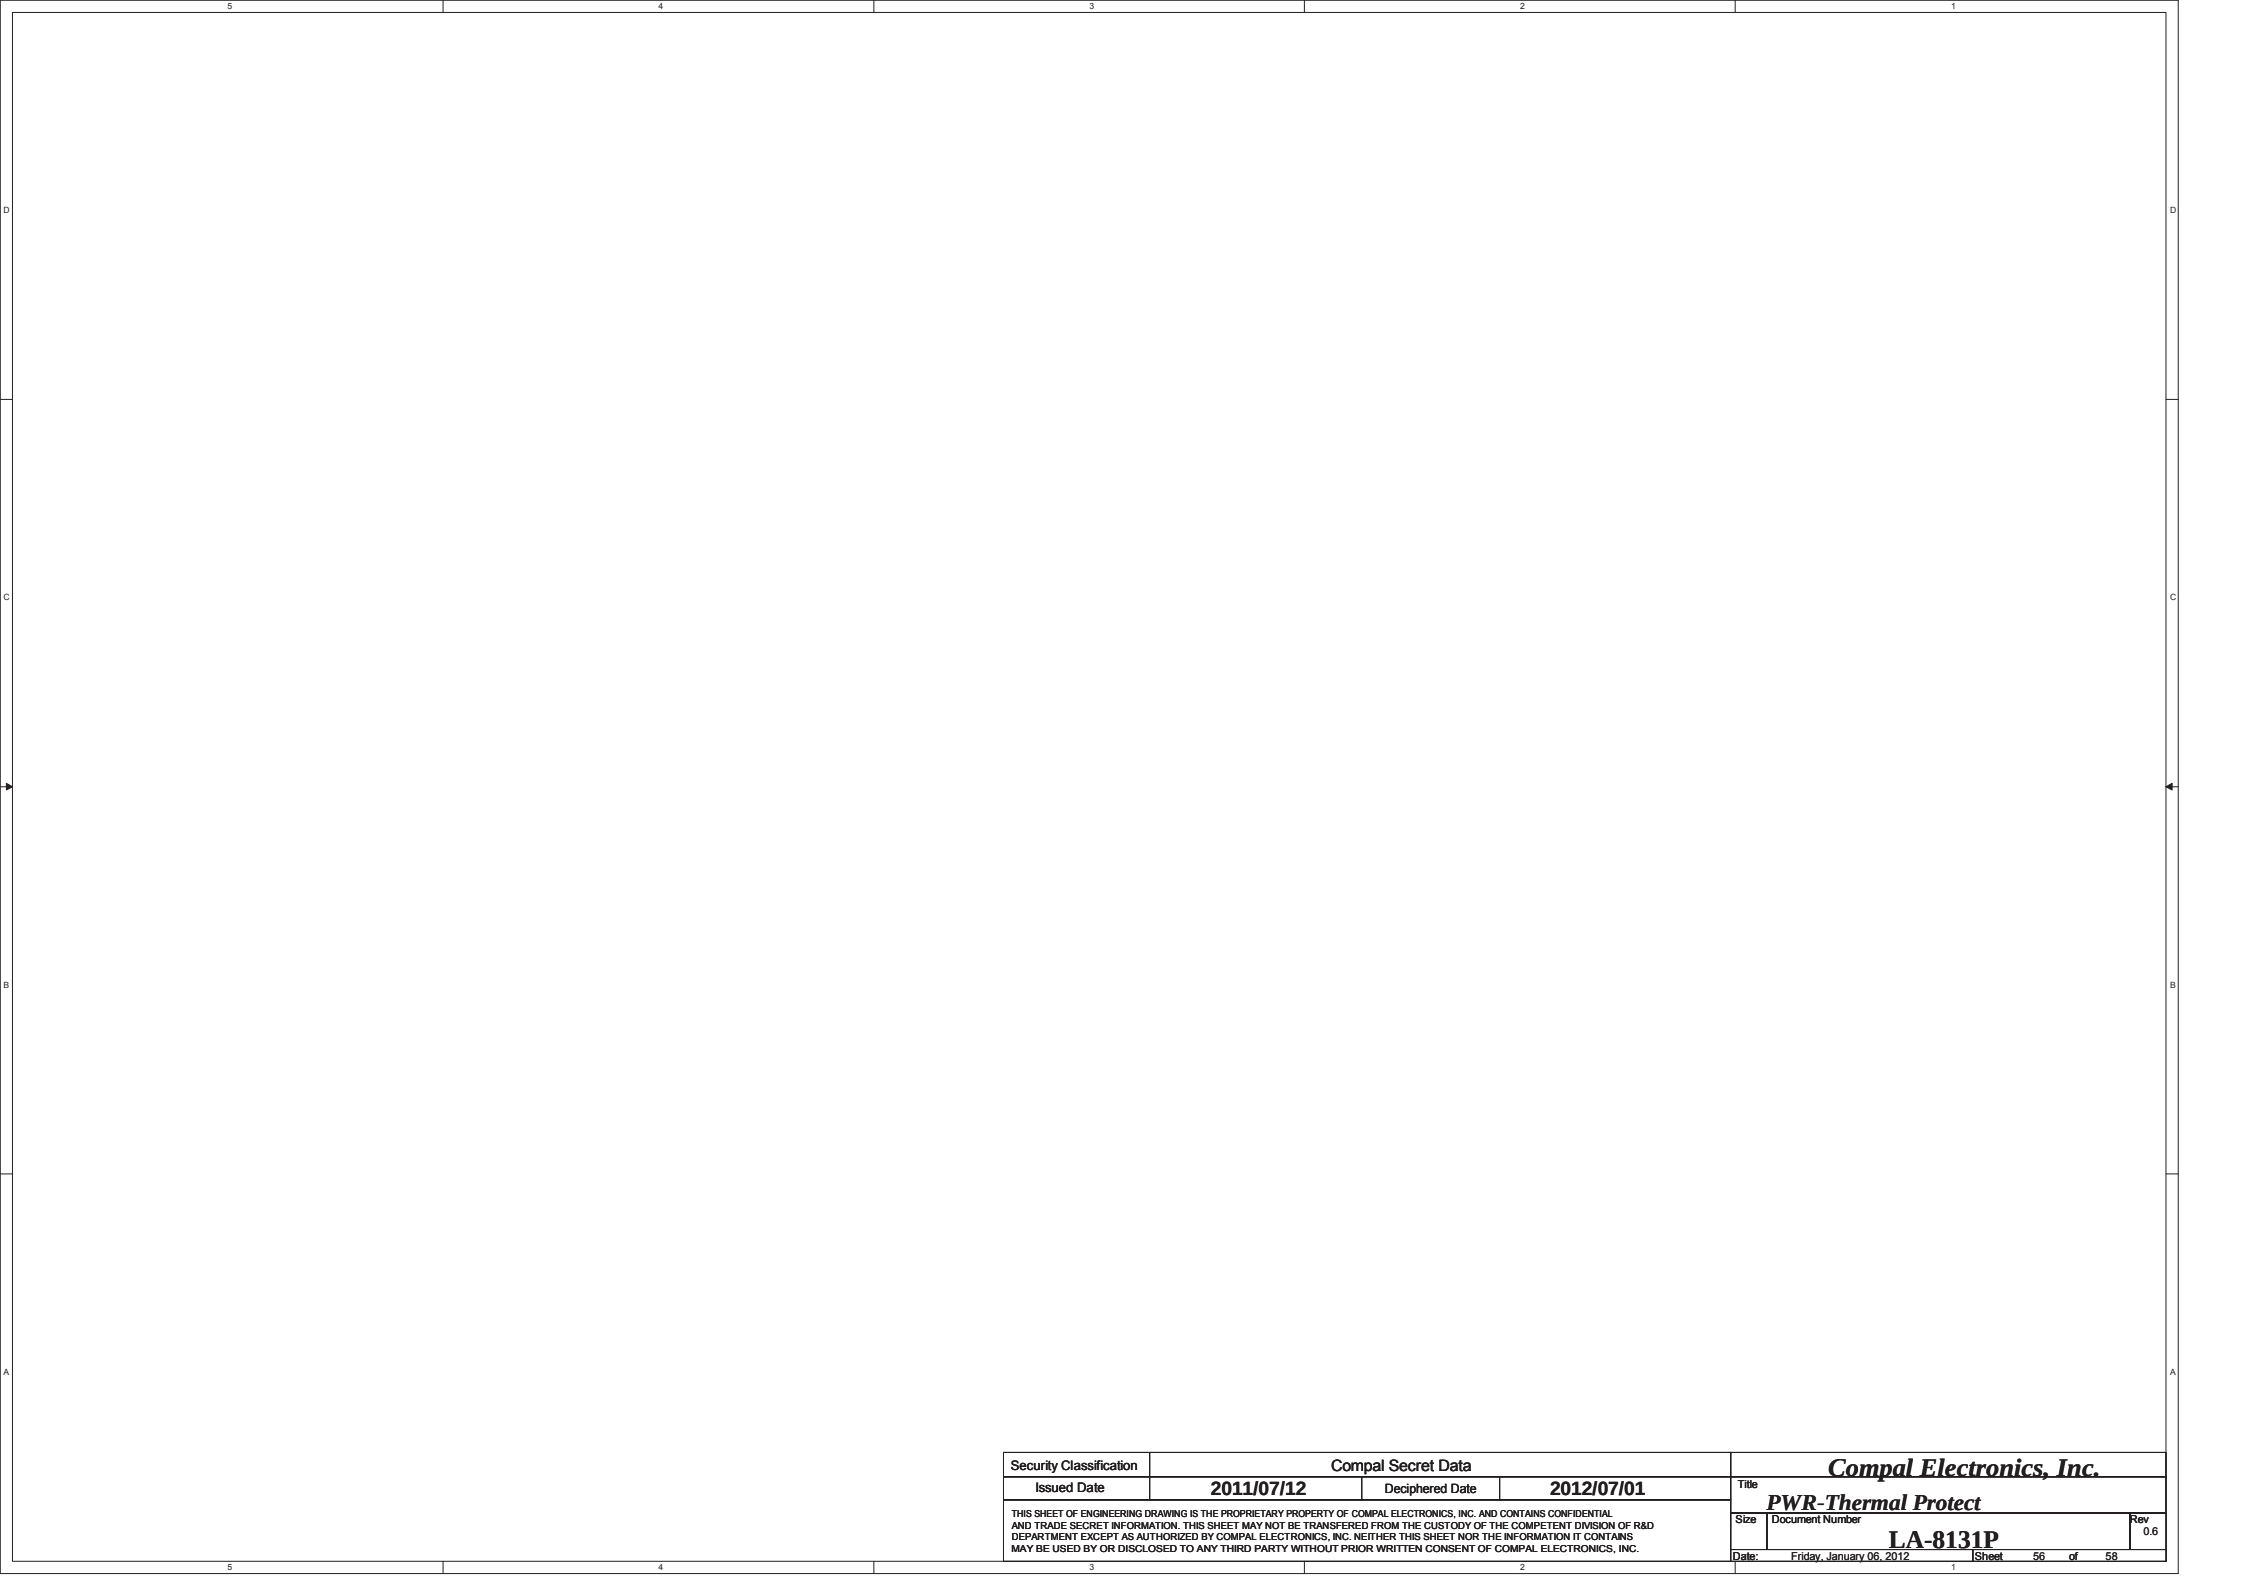

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2011/07/12	Deciphered Date	2012/07/01	Title	PWR-Thermal Protect
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Document Number
				LA-8131P	
				Date:	Friday, January 06, 2012
				Sheet	56 of 58

Version change list (P.I.R. List)

Item	Reason for change	PG#	Modify List	Date	Phase
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					

Version Change List (P.I.R. List)

Phase	Date	No.	BOM	Sch	Layout	Description	function
	2011/09/13	No1		v	v	Add C2325,C2326,C2327,C2328,C2329,R2319,R2324,Q2312	Add SBA function (+3VM) power
	2011/09/15	No2		v		Del Q2305	Del SYSYON#
	2011/09/15	No3		v		Add EC pin 119(M_PWR_ON) for SBA function	Add SBA function
	2011/09/15	No4		v		Add EC pin 120(PCH_SLP#) from PCH to EC for SBA function	Add SBA function
	2011/09/15	No5		v		Add EC pin72 (Muxless_STAT) for GPU STAT	Add Muxless_STAT function
	2011/09/15	No6		v		Del PR310, PR311, PR312, PR313, net name:"H_PROCHOT#", +3VALW.	PWR-CHARGER-BQ24727
	2011/09/15	No7	v			mount PC832	
	2011/09/15	No8		v	v	Add R2482,Q2404,C2509,R2481,R2485,Q2400,R2483,C2501	AOAC Function
	2011/09/15	No9		v	v	change net name BT_OFF# to BT_ON# and change PCH EN GPIO from GPIO34 to GPIO36 R280 from @ to mount,R282 from mount to @	BT Function
	2011/09/15	No10		v	v	change net name(Mini-Express) from BT_OFF# to WLBT_OFF# PCH EN GPIO change to GPIO34	BT Function
	2011/09/19	No11		v	v	change +3VS WLAN net name to +3VS_AOAC change +3VS_WWAN net name to +3VS_AOAC	AOAC Function
	2011/09/19	No12		v	v	Del R1010 for LVDS CONN plug high voltage	LVDS CONN
	2011/09/19	No13		v	v	R1102,R1104,R1105 from @ to mount fix MIC(ECR97236)issue	MIC function
	2011/09/19	No14		v	v	Add R2470 for 80 port function	80 port function
	2011/09/19	No15		v	v	Del R2476 Add Q2405	BT Function
	2011/09/20	No16		v	v	Add power schematic 9/15 again modify RF PC423, PC425, PC519, PC620, PC717, PC873, PC874, PC824, PC518, PC1017, PC1018, PC1019, PC422, PC516, PC517 modify POWER在VGA的PWM IC 加的零件PR809, PR870	
	2011/09/22	No17		v	v	Add U10,C589,C645 for TPM function	TPM function
	2011/09/22	No18		v	v	Add R110,R112 for SPI POWER choose(SBA function)	
	2011/09/23	No19		v	v	modify power page 44-57(PJ1201 JUMP form 43X79 change to 43X79)	
	2011/09/26	No20		v	v	change CPU footprint from TYCO 2013620-2_989P-T to TYCO 2013620-2_989P-T-A39 change PCH footprint from PANTHER-POINT_FCBGA_989P-T to PANTHER-POINT_FCBGA_989P-T-A39 change GPU footprint N13P-PES-A1_FCBGA_908P to N13P-PES-A1_FCBGA_908P-A39 change VRAM footprint K4W1G1646E-HC12_FBGA_96P to K4W1G1646E-HC12_FBGA_96P-A39	
	2011/09/26	No21		v	v	change PCH_GPIO24(R208) pull up to +3V_PCH	
	2011/09/26	No22		v		change P18 (R311,R330,R286,R329) for UMA and Optimus memon	
	2011/09/26	No23		v		change net name PCH_THRMTRIP#_R to VGA_THRMTRIP#	
	2011/09/26	No24		v	v	PQ702 change to TPC8005,Del PR705 PQ1001,PQ1002,PQ1005 change to TOC8065,Del PR1001,PR1002,PR1007	
	2011/09/26	No25		v	v	p43 change Q2304 dual channel 2n7002 to single channel Q2304,Q2305(Q2305 @) p43 change Q2306 dual channel 2n7002 to single channel Q2306,Q2311(Q2311 @)	
	2011/09/27	No27	v			modify EC Board ID R2213 to 18K	
	2011/09/27	No28		v	v	net name CX_GPIO0 connect to U1101 pin 38	
	2011/09/27	No29		v	v	Add C2152,C2153,D2113 for ESD	
	2011/09/27	No30		v	v	change NVIDIA N13M ROM_SCLK from 15K PU to 5K PU	
	2011/09/27	No31		v	v	change ESD part D2401,D2403,D2405 power from +5VALW to +USB VCCA	
	2011/09/27	No32		v	v	Add C2108 for GPU_CLKREQA	
	2011/09/27	No33				Add Q2406 , modify R2401,Change PCH_GPIO19 to ODD_DET#,for zero power ODD	
	2011/09/27	No34				change WLBT_OFF# to PCH_GPIO34	
	2011/09/27	No35				change PCH_GPIO34 to WLBT_OFF#(mini card pin5)	
	2011/09/27	No36				change BT_ON# connect to WLBT_OFF#(mini card pin51)	
	2011/09/28	No37				C76 , R1123 , c1131 , R2201,C2209 C84,C85 from @ to mount for RF team	
	2011/09/29	No38				R1529 change to 15K	
	2011/09/29	No39				Add CONN JDB3 fo debug	
	2011/09/29	No40				Add R2460,R2438,R2471,R2472,R2475,R2476 for PS8520B	
	2011/09/29	No41				change D2403 ,D2401 power to +USB_VCCB,and del D2403 ,D2401,D2405 Pin3 net	
	2011/09/29	No42				change power schematic del PC606 (22U_0805_6.3V6M) PR855.1 net change form +VGA_CORE to +VGA_COREP PR827 mount change to 0(non-mount) PR839 for 47Kohm change to 147Kohm PR103 for 0ohm change to 270ohm PC1166 non-mount,PC1173 non-mount,PC1158 non-mount	
	2011/09/29	No43					
	2011/09/29	No44				Add Q2313,C2305,C2306,C2307,C2308,R2318,R2320,R2320,C2322 for +3V_PCH change CRT CONN to DC061109231(footprint pin modify) Add PR954,PR955	
	2011/09/29	No45				Add H16,H27 change Q2304,Q2305 to Q2304 modify PTH H11,H18 ,H21 Del T10 for SUS_STAT(SLP_S3# 走不出来)	
	2011/10/04	No46				reserve R352,R353 for SATA re-drive PS-8131B change net name fron WLBT_OFF to WLBT_OFF_5# modify PCH_GPIO34 connect to BT_ON# for BT module modify PCH_GPIO36 from BT_ON# connect to WLBT_OFF_51# for mini card BT combo module changr Q2301 to 2N7002	
	2011/10/05	No47				Del R2469,T49,T45,T41,T37,T36,T28,T26 for ME 限高0 changer power net +3VS_FP to +3VS update power schematics P44-P57	
	2011/10/06	No48				change Q1202 part to SB000007H10. change JCARD1 PN to SP02000H810 footprint: ACES_87213-1400G_14P change some CONN part NO. for ME CONN list Add D2416	

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date		2011/07/12	Deciphered Date	2012/07/01	
Title		PIR (EE)		LA-8133P	
Size		Document Number	Rev		0.6
Date		Friday, January 06, 2012	Sheet	58	of 58