

Compal Confidential

NEW70 / 80 / 90 / 50 <LA-5892P> M/B Schematics Document PEW51 <LA-5892P> M/B Schematics Document

Intel Arrandale Processor with DDRIII + Ibex Peak-M

2010-06-09
REV:1.0

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2010/04/15	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Rev	C
				Document Number	401826
Date: Tuesday, June 22, 2010				Sheet	1 of 49


Compal Confidential

Model Name NEW70 / 80 / 90 / 50

File Name : LA-5892P

ZZZ
DA20C900200
PCB NEW70 LA-5892P

ZZZ1
R00000003HM
HDMI+HDCP LOGO

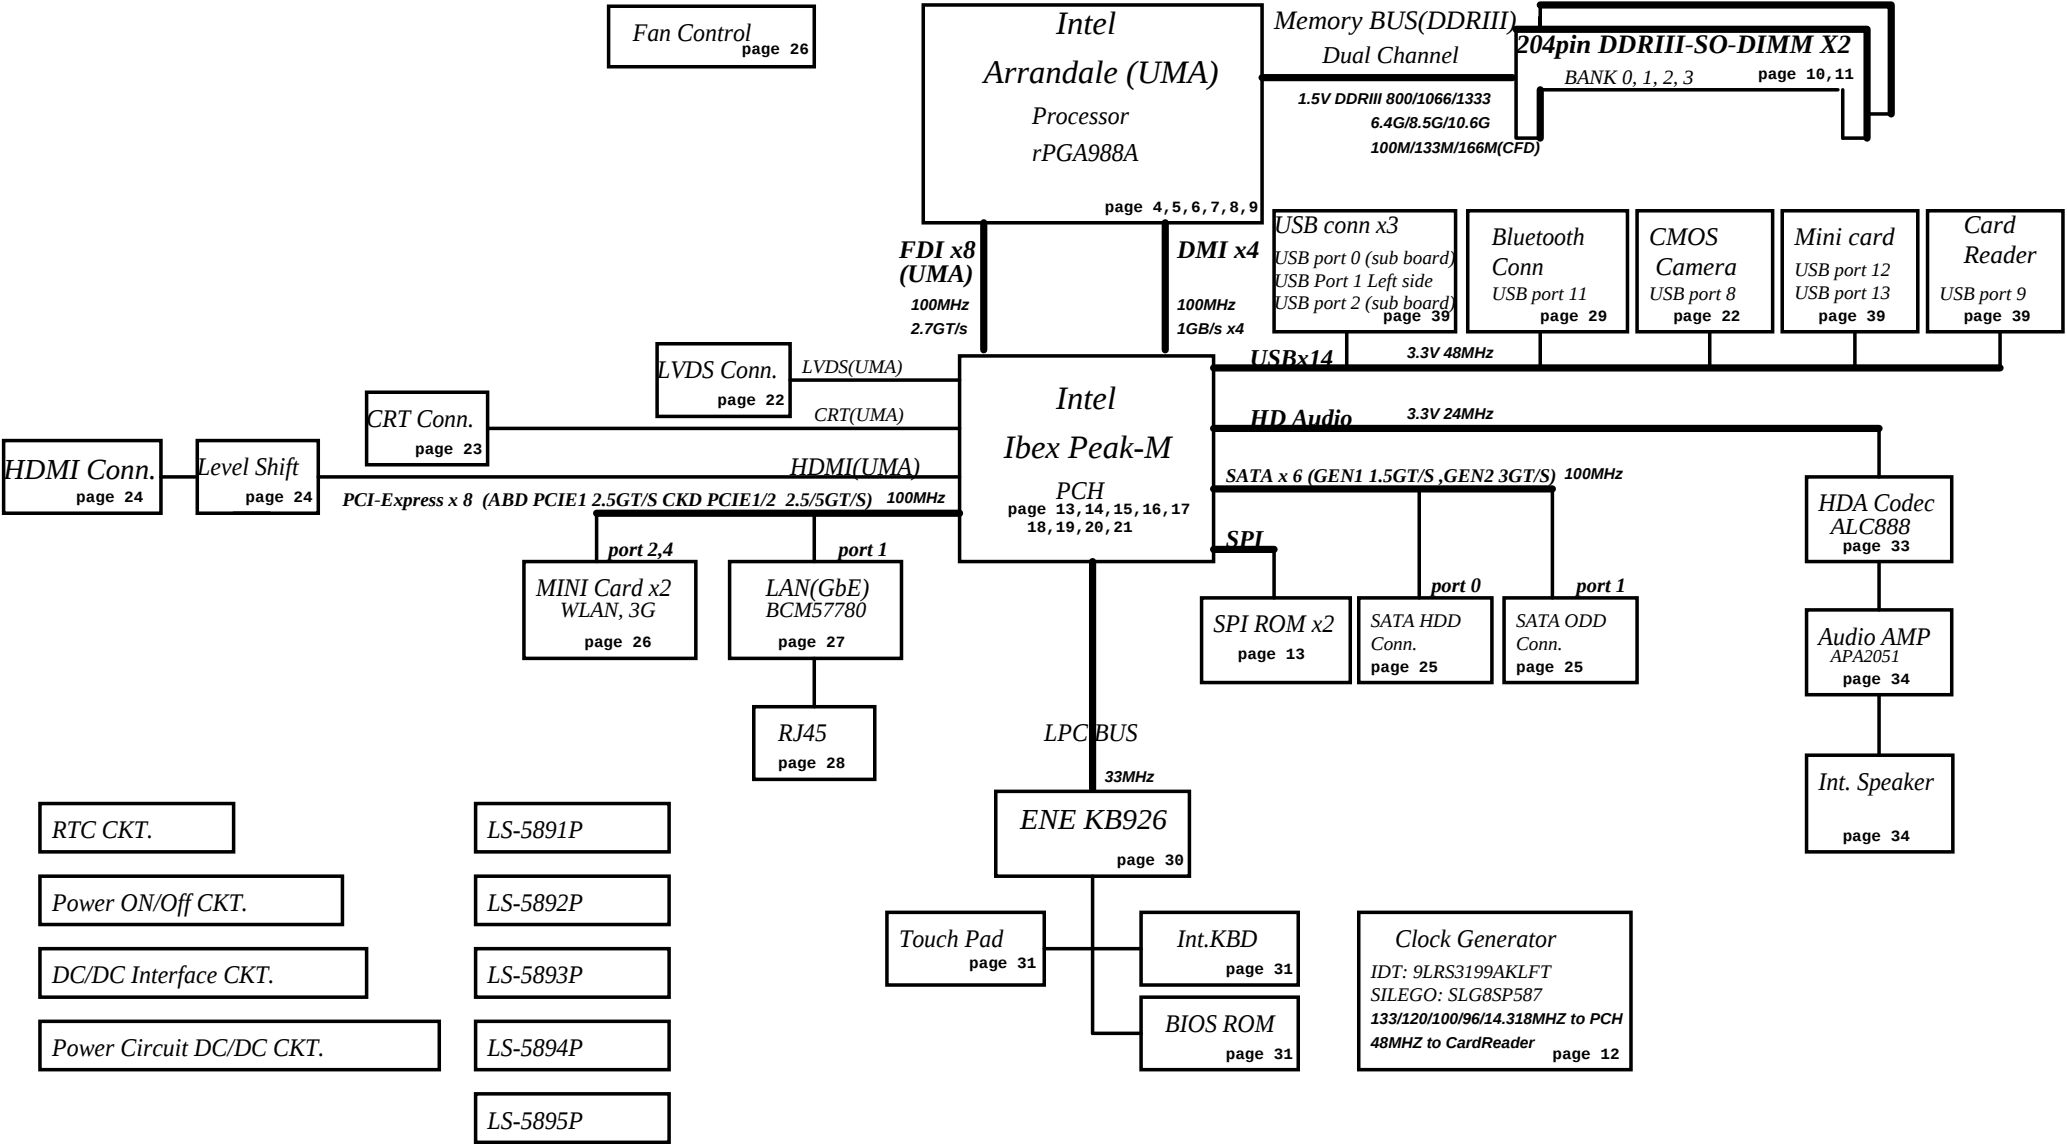

Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2009/5/12	Deciphered Date	2010/04/15	Title	SCHEMATICS,MB A5892	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826	Rev C
				Date:	Tuesday, June 22, 2010	Sheet 2 of 49

Voltage Rails

Power Plane	Description	S1	S3	S5
VIN	Adapter power supply (19V)	N/A	N/A	N/A
B+	AC or battery power rail for power circuit.	N/A	N/A	N/A
+CPU_CORE	Core voltage for CPU	ON	ON	OFF
+0.75VS	0.75V switched power rail for DDR terminator	ON	OFF	OFF
+1.05VS	1.05V switched power rail for PCH	ON	OFF	OFF
+1.05VS_VTT	1.05V switched power rail (1.05 for AUB CPU)	ON	OFF	OFF
+1.5V	1.5V power rail for DDRIII	ON	ON	OFF
+1.5VS	1.5V switched power rail	ON	OFF	OFF
+1.8VS	1.8V switched power rail	ON	OFF	OFF
+3VALW	3.3V always on power rail	ON	ON	ON*
+3V_LAN	3.3V power rail for LAN	ON	ON	ON*
+3VS	3.3V switched power rail	ON	OFF	OFF
+5VALW	5V always on power rail	ON	ON	ON*
+5VS	5V switched power rail	ON	OFF	OFF
+5V	5V power rail for PCH	ON	ON	ON
+VSB	VSB always on power rail	ON	ON	ON*
+RTCVCC	RTC power	ON	ON	ON

Note : ON* means that this power plane is ON only with AC power available, otherwise it is OFF.

External PCI Devices

Device	IDSEL#	REQ#/GNT#	Interrupts
--------	--------	-----------	------------

EC SM Bus1 address

Device	Address	Device	Address
Smart Battery	0001 011X b		

EC SM Bus2 address

Ibex SM Bus address

Device	Address
Clock Generator (9LRS3199AKLFT, SLG8SP587)	1101 0010b
DDR DIMM0	1001 000Xb
DDR DIMM2	1001 010Xb

STATE	SIGNAL	SLP_S1#	SLP_S3#	SLP_S4#	SLP_S5#	+VALW	+V	+VS	Clock
Full ON		HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON
S1(Power On Suspend)		LOW	HIGH	HIGH	HIGH	ON	ON	ON	LOW
S3 (Suspend to RAM)		LOW	LOW	HIGH	HIGH	ON	ON	OFF	OFF
S4 (Suspend to Disk)		LOW	LOW	LOW	HIGH	ON	OFF	OFF	OFF
S5 (Soft OFF)		LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF

Project ID / Board ID Table for EC-AD channel

Vcc	3.3V +/- 5%					
Ra/Rc	100K +/- 5%					
	Rb / Rd	VAD_BID min	VAD_BID typ	VAD_BID max	Board ID	Project ID
0	0	0 V	0 V	0 V	0.1	NEWX0
1	8.2K +/- 5%	0.216 V	0.250 V	0.289 V	0.2	PEW51
2	18K +/- 5%	0.436 V	0.503 V	0.538 V	0.3	
3	33K +/- 5%	0.712 V	0.819 V	0.875 V	1.0	
4	56K +/- 5%	1.036 V	1.185 V	1.264 V		
5	100K +/- 5%	1.453 V	1.650 V	1.759 V		
6	200K +/- 5%	1.935 V	2.200 V	2.341 V		
7	NC	2.500 V	3.300 V	3.300 V		


BTO Option Table	
BTO Item	BOM Structure
HDMI	HDMI@
3G	3G@
9050@	NEW90 / NEW50
7080@	NEW70 / NEW80
For NEWX0 ID	NEWX0@
For PEW51 ID	PEW51@


BOM Config


USB Port Table



USB 2.0	USB 1.1	Port	4 External USB Port	3 External USB Port
EHCI1	UHCI0	0	Ext1 USB	Ext1 USB
		1	Ext3 HS USB	Ext3 HS USB
		2	Ext2 USB	Ext2 USB
	UHCI1	3		
		4		
	UHCI2	5		
		6		
	UHCI3	7		
EHCI2	UHCI4	8	Camera	Camera
		9	Card Reader	Card Reader
	UHCI5	10	SIM CARD	SIM CARD
		11	Blue Tooth	Blue Tooth
	UHCI6	12	1st Min-Card	1st Min-Card
		13	2st Min-Card	2st Min-Card

Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2009/08/01	Deciphered Date	2010/08/01	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date:	Tuesday, June 22, 2010
				Sheet	3 of 49


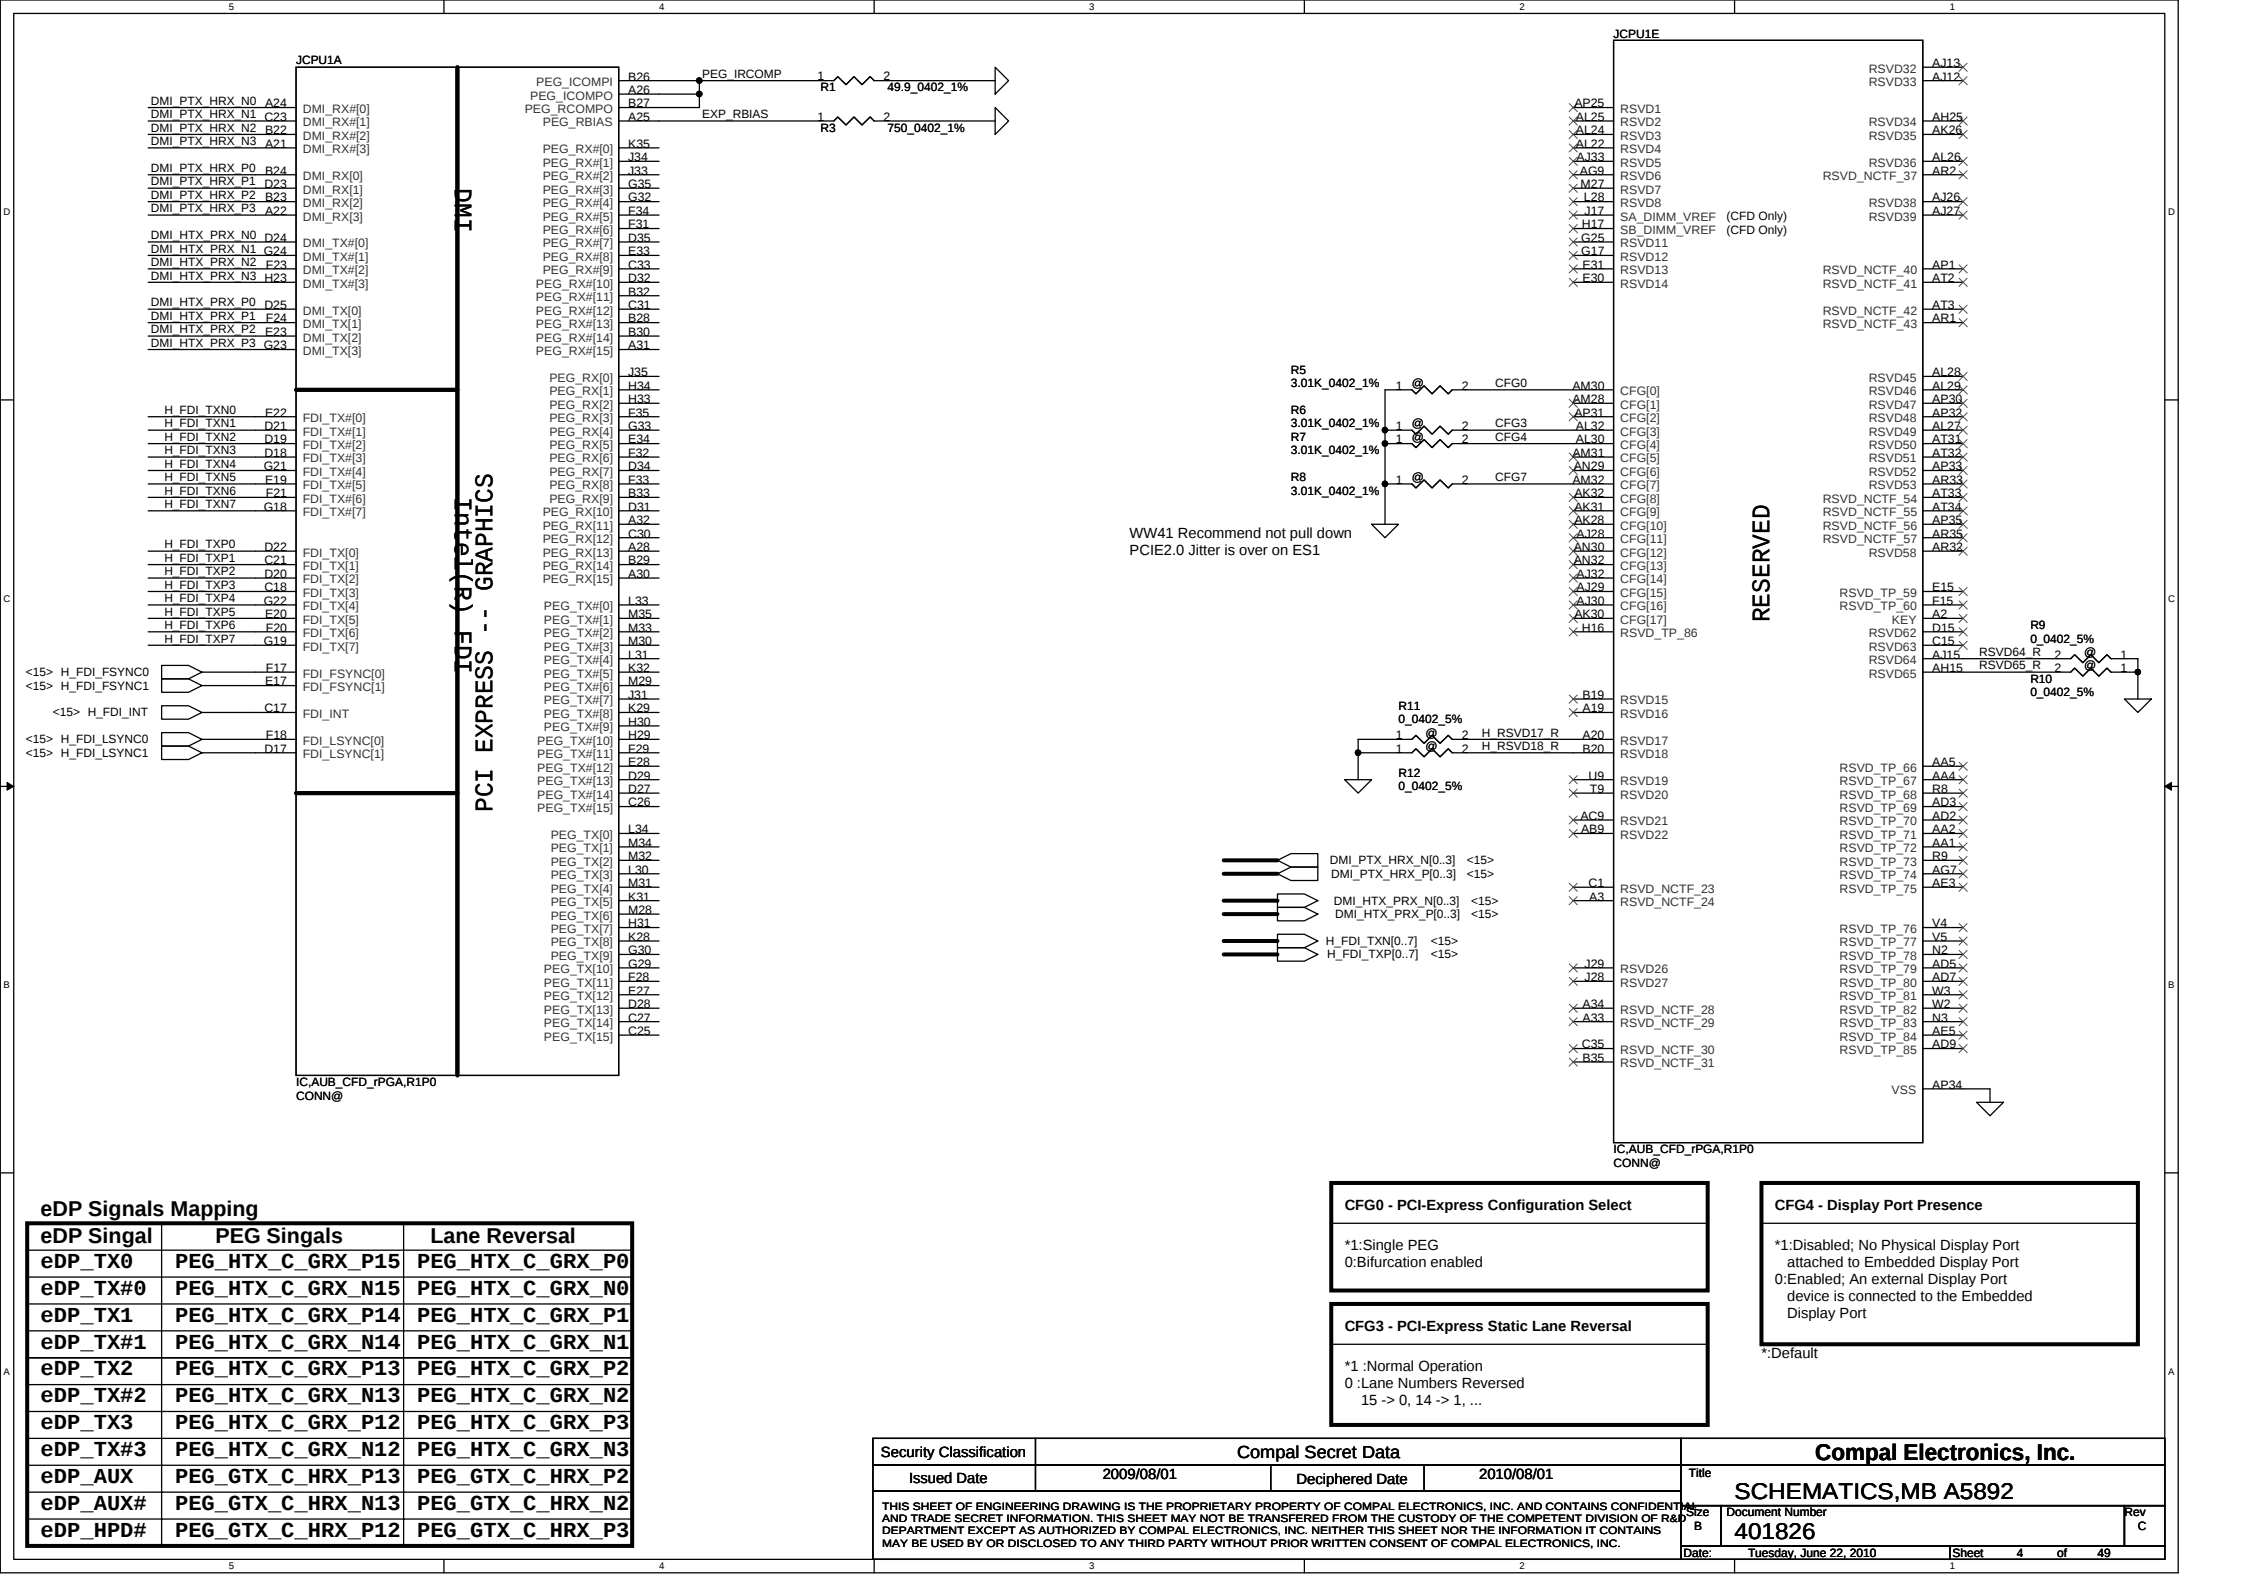


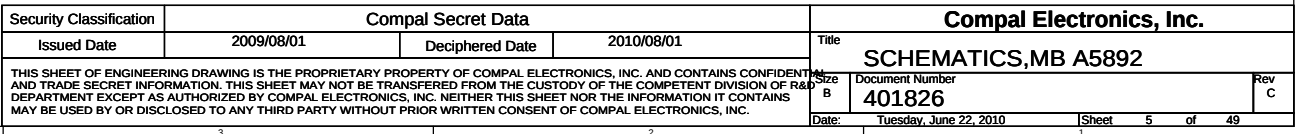

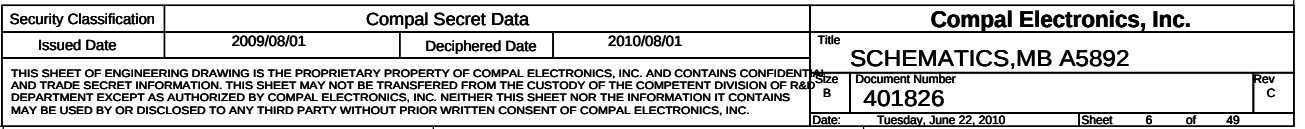


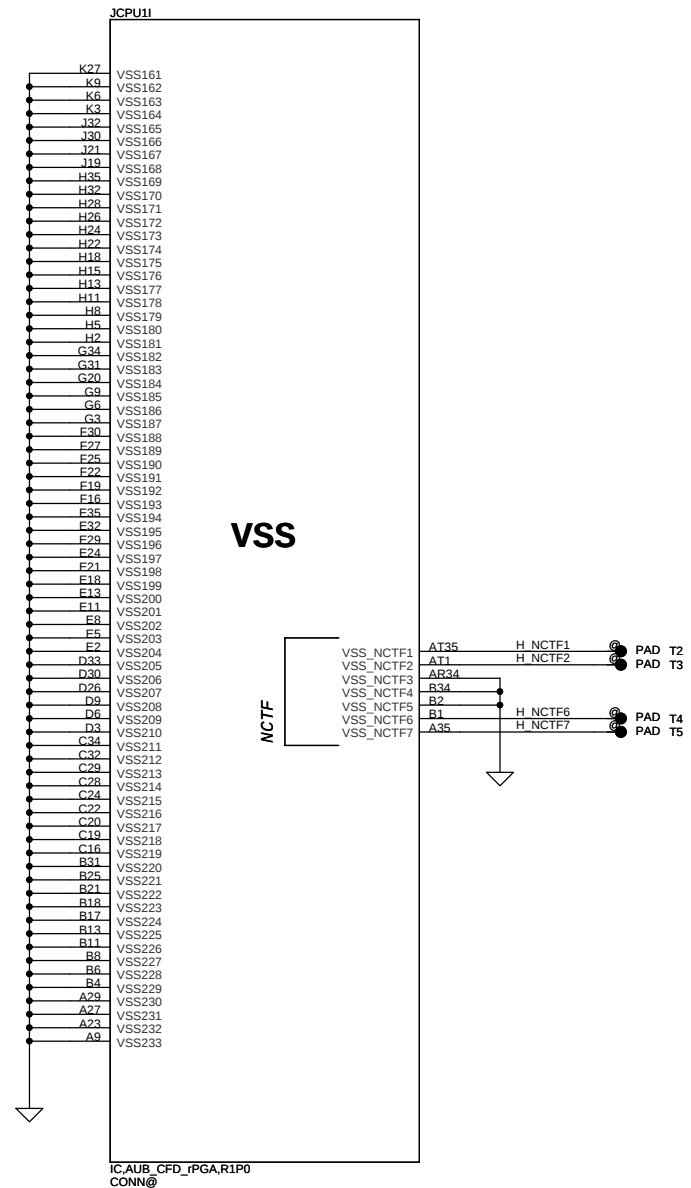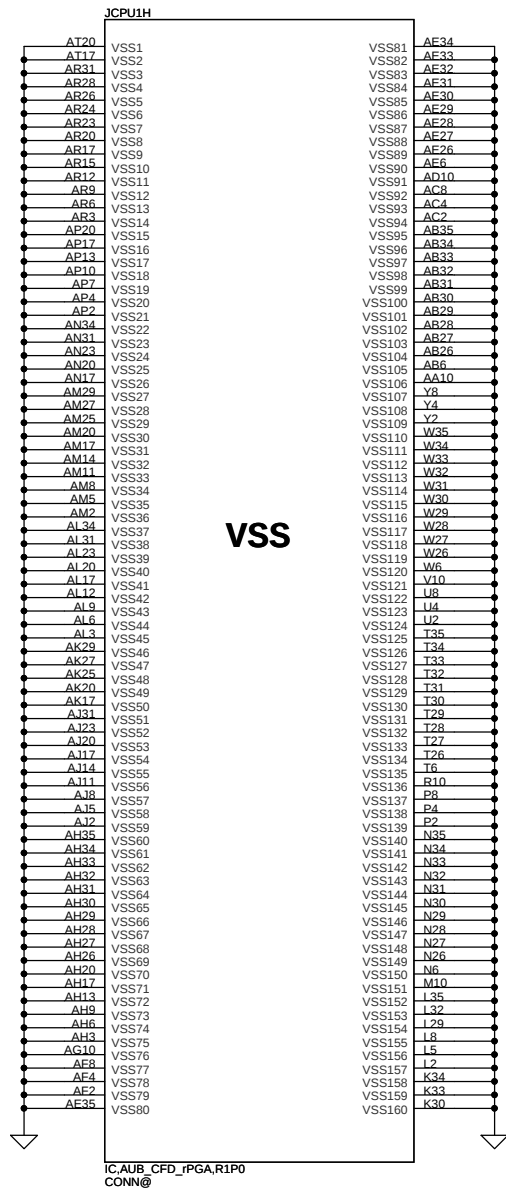


Security Classification		Compal Secret Data				Compal Electronics, Inc.				
Issued Date		2009/08/01		Deciphered Date		2010/08/01		Title		
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.						SCHEMATICS,MB A5892				
						Size	Document Number			Rev
						Cust	401826			C
Date:						Tuesday, June 22, 2010		Sheet	9 of 49	





Layout Note:
Place near JDIMM1

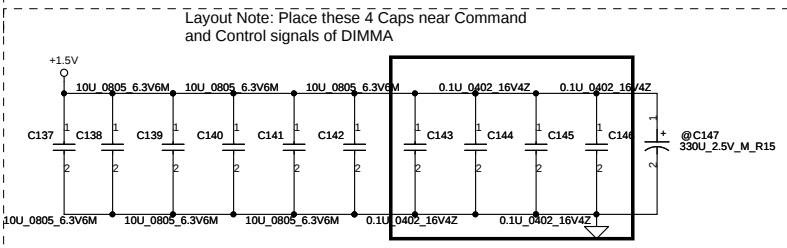

Layout Note:
Place near JDIMM1.203 & JDIMM1.204




<6> DDR_A_DQS#[0..7]
<6> DDR_A_DQ[0..63]
<6> DDR_A_DM[0..7]
<6> DDR_A_DQS[0..7]
<6> DDR_A_MA[0..15]

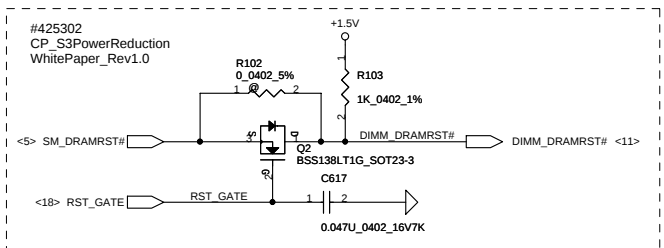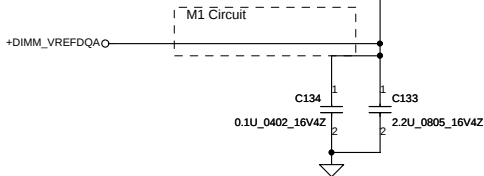

<6> DDR_A_CKE0
<6> DDR_A_BS2
<6> DDR_A_BS0
<6> DDR_A_WE#
<6> DDR_A_CAS#
<6> DDR_A_CS1#


DDR A D32
DDR A D33
DDR A D34
DDR A D35
DDR A D40
DDR A D41
DDR A D42
DDR A D43
DDR A D48
DDR A D49
DDR A D50
DDR A D51
DDR A D56
DDR A D57
DDR A D58
DDR A D59

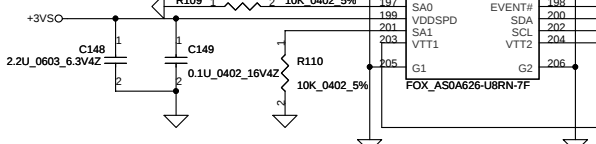

JDIMM1
VREF_DQ
VSS2
DQ0
DQ1
VSS4
DM0
VSS5
DQ2
DQ3
VSS7
DQ8
DQ9
VSS9
DQS#1
DQS1
VSS11
DQ10
DQ11
VSS13
DQ16
DQ17
VSS15
DQS#2
DQS2
VSS18
DQ18
DQ19
VSS20
DQ24
DQ25
VSS22
DM3
VSS23
DQ26
DQ27
VSS25






DDR A CKE1
DDR A MA15
DDR A MA14
DDR A MA11
DDR A MA7
DDR A MA6
DDR A MA4
DDR A MA2
DDR A MA0
DDR A CLK1
DDR A CLK1#
DDR A BS1
DDR A_RAS#
DDR A_CS#
DDR A_ODT0
DDR A_ODT1

DDR A D36
DDR A D37
DDR A DM4
DDR A D38
DDR A D39
DDR A D44
DDR A D45
DDR A DQ5#5
DDR A DQ55
DDR A D46
DDR A D47
DDR A D52
DDR A D53
DDR A DM6
DDR A D54
DDR A D55
DDR A D60
DDR A D61
DDR A DQ5#7
DDR A DQ57
DDR A D62
DDR A D63
PM_EXTTs#0 1
D_CK_SDATA
D_CK_SCLK
D_CK_SCLK






DDR3 SO-DIMM A
Change to Reverse Type
8mm High




Security Classification				Compal Secret Data				Title			
Issued Date				Deciphered Date				Document Number			
2009/08/01				2010/08/01				401826			
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PRIOR WRITTEN PERMISSION OF COMPAL ELECTRONICS, INC.				DATE: Tuesday, June 22, 2010				Sheet 10 of 49			

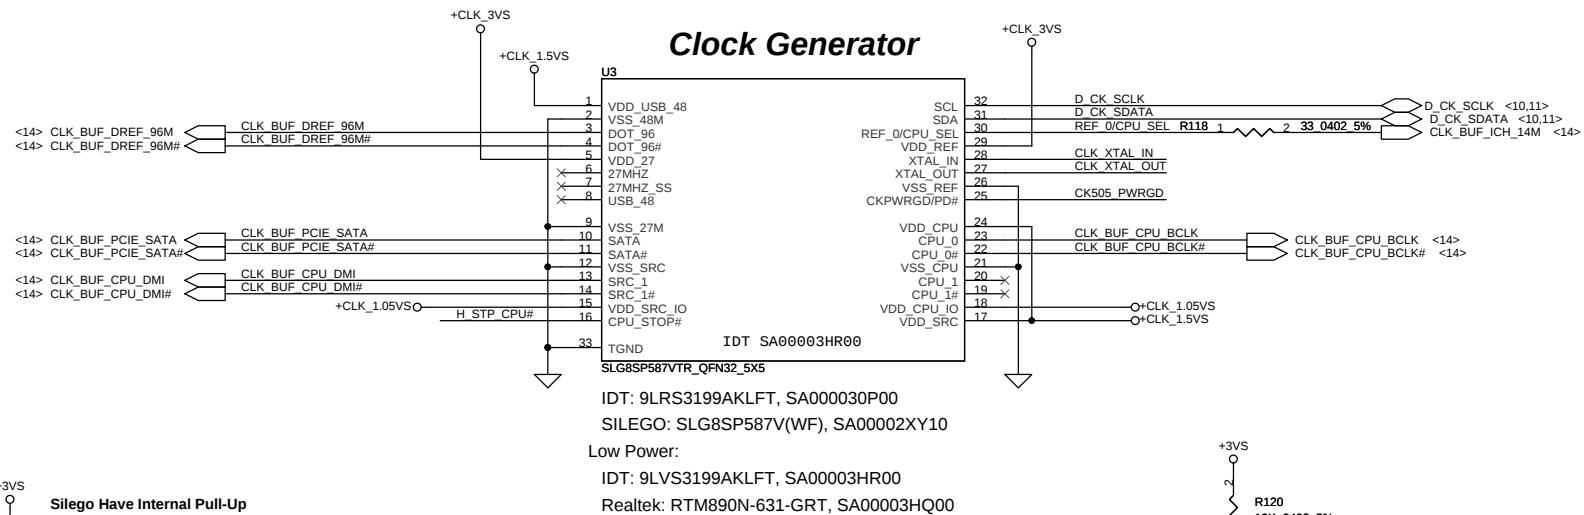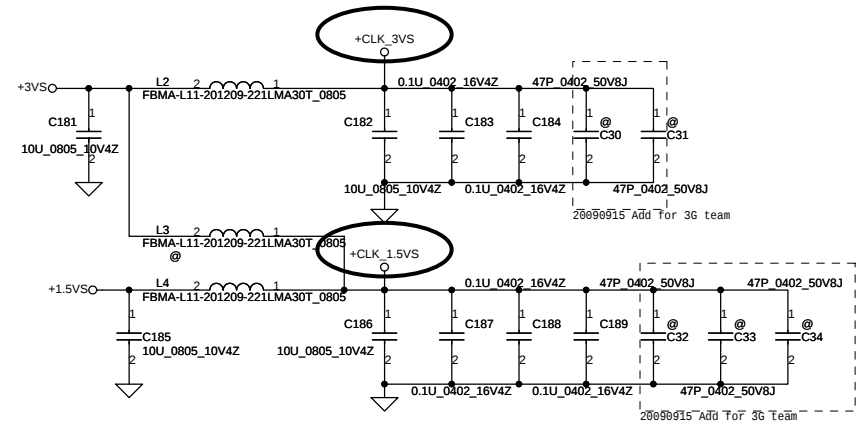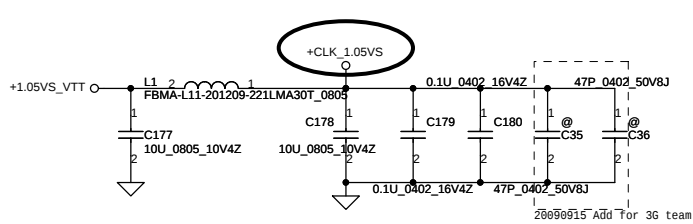

PIN 30	CPU_0	CPU_1
0 (Default)	133MHz	133MHz
1	100MHz	100MHz

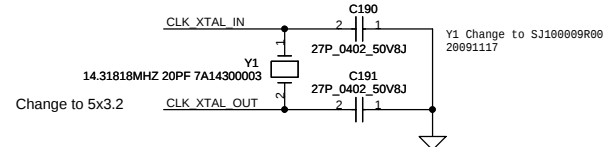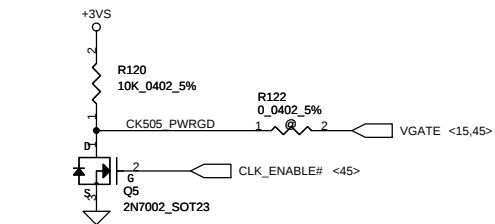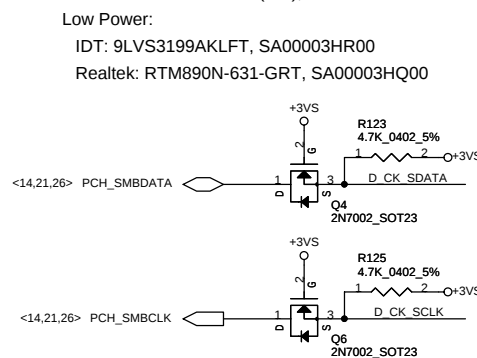




Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/08/01	Deciphered Date	2010/08/01	Title	SCHEMATICS, MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date	Tuesday, June 22, 2010
				Sheet	12 of 49



If GPIO33 pull down, ME will not working. For factory update ME, pull down resistor pull under door.

Components: R140 (100K_0402_5%), Q7 (2N7002_SOT23)

GPIO33 has a weak internal pull-up
NOTE: Asserting the GPIO33 low on the rising edge of PWROK will also halt Intel Management Engine after chipset bringup and disable runtime Intel Management Engine features. This is a debug mode and must not be asserted after manufacturing/ debug.


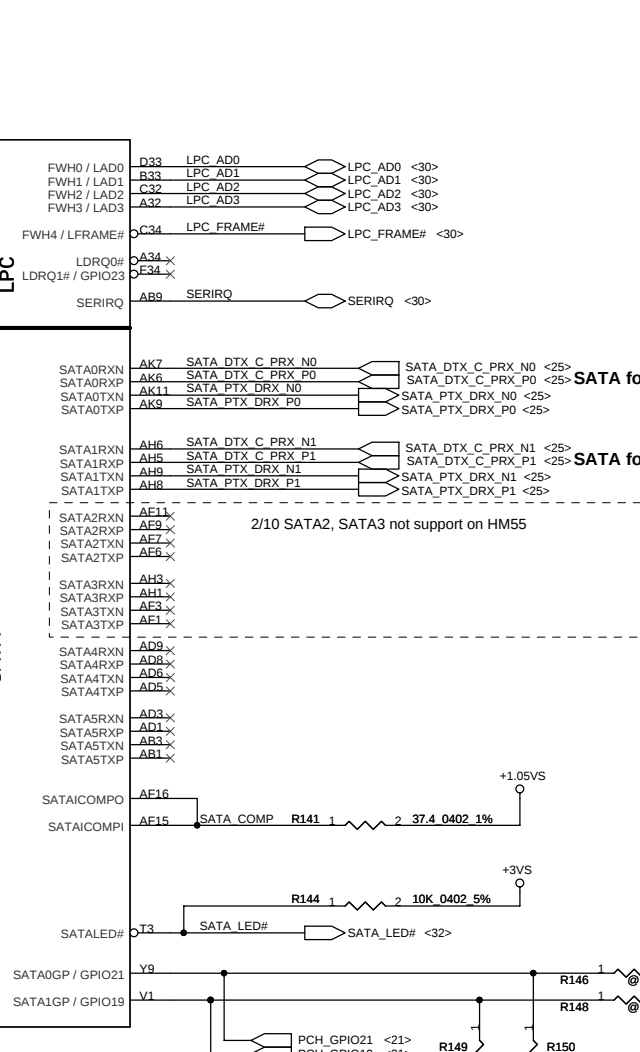
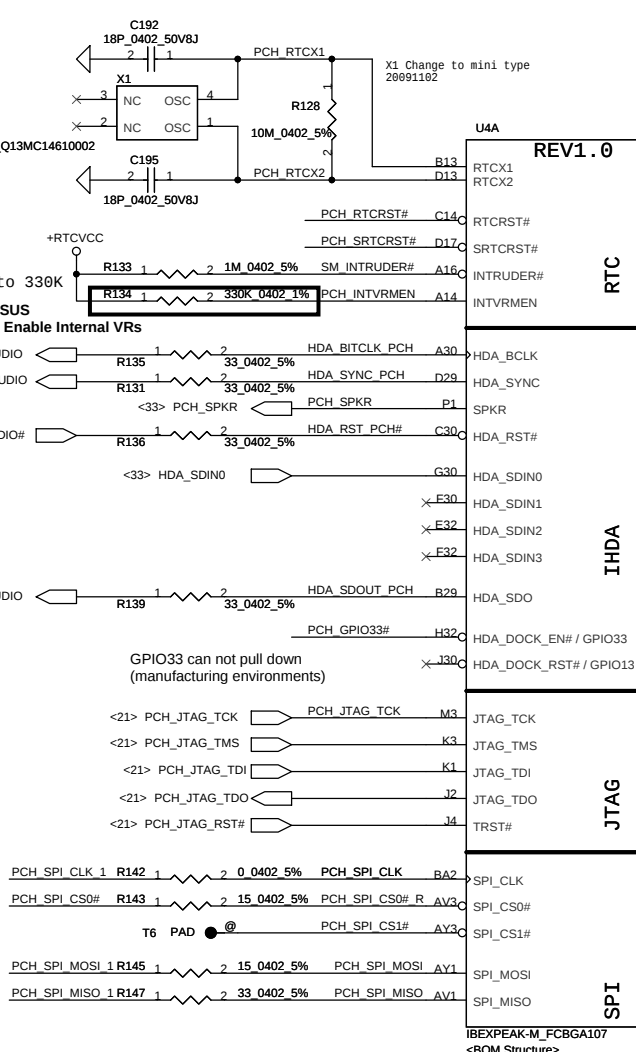


20090923 Update
2008 Intel MOW36/MOW50
TDO:
Reserved on ES1 Sample
Mount R516, R517 on ES2 Sample
MP mount R689, R690,
R691, R692 and remove
others

GPIO21	Project
0	NEW70/90
1	NEW71/91

<4> DMI_HTX_PRX_N[0..3] DMI_HTX_PRX_N[0..3]
<4> DMI_HTX_PRX_P[0..3] DMI_HTX_PRX_P[0..3]
<4> DMI_PTX_HRX_N[0..3] DMI_PTX_HRX_N[0..3]
<4> DMI_PTX_HRX_P[0..3] DMI_PTX_HRX_P[0..3]

<4> H_FDI_TXN[0..7] H_FDI_TXN[0..7]
<4> H_FDI_TXP[0..7] H_FDI_TXP[0..7]













DMI_HTX_PRX_N0 BC24
DMI_HTX_PRX_N1 BJ22
DMI_HTX_PRX_N2 AW20
DMI_HTX_PRX_N3 BJ20
DMI_HTX_PRX_P0 BD24
DMI_HTX_PRX_P1 BC22
DMI_HTX_PRX_P2 BA20
DMI_HTX_PRX_P3 BG20
DMI_PTX_HRX_N0 BE22
DMI_PTX_HRX_N1 BE21
DMI_PTX_HRX_N2 BD20
DMI_PTX_HRX_N3 BE18
DMI_PTX_HRX_P0 BD22
DMI_PTX_HRX_P1 BH21
DMI_PTX_HRX_P2 BC20
DMI_PTX_HRX_P3 BD18

DMIORXN
DMI1RXN
DMI2RXN
DMI3RXN
DMIORXP
DMI1RXP
DMI2RXP
DMI3RXP
DMIOTXN
DMI1TXN
DMI2TXN
DMI3TXN
DMIOTXP
DMI1TXP
DMI2TXP
DMI3TXP

REV1.0
DMI
FDI

FDI_RXN0 BA18
FDI_RXN1 BH17
FDI_RXN2 BJ16
FDI_RXN3 BJ16
FDI_RXN4 BA16
FDI_RXN5 BE14
FDI_RXN6 BA14
FDI_RXN7 BC12
FDI_RXP0 BB18
FDI_RXP1 BE17
FDI_RXP2 BC16
FDI_RXP3 BG16
FDI_RXP4 AW16
FDI_RXP5 BD14
FDI_RXP6 BB14
FDI_RXP7 BD12

FDI_INT B114
FDI_FSYNC0 BE13
FDI_FSYNC1 BH13
FDI_LSYNC0 B112
FDI_LSYNC1 BG14
H_FDI_INT <4>
H_FDI_FSYNC0 <4>
H_FDI_FSYNC1 <4>
H_FDI_LSYNC0 <4>
H_FDI_LSYNC1 <4>



System Power Management

10/2 Intel suggestion change to 10K
CH751H-40PT_SOD323-2
U6 change to SA000000H00
NC7SZ08P5X_NL_SC70-5

IBEXPEAK-M_FCBGA107
<BOM Structure>

IBEXPEAK-M_FCBGA107
<BOM Structure>

IBEXPEAK-M_FCBGA107
<BOM Structure>

IBEXPEAK-M_FCBGA107
<BOM Structure>

IBEXPEAK-M_FCBGA107
<BOM Structure>

IBEXPEAK-M_FCBGA107
<BOM Structure>


IBEXPEAK-M_FCBGA107
<BOM Structure>

IBEXPEAK-M_FCBGA107
<BOM Structure>


IBEXPEAK-M_FCBGA107
<BOM Structure>

WAKE# J12
PCH_CLKRUN# Y1
PCH_GPIO61 P8
PCH_SUSCLK E3
PM_SLP_S5# E4
PM_SLP_S4# H7
PM_SLP_S3# E12
PM_SLP_M# K8
PM_SLP_DSW# N2
H_PM_SYNC B110
PM_SLP_LAN# E6


32.768KHZ ouput for remove EC crystal
20091103

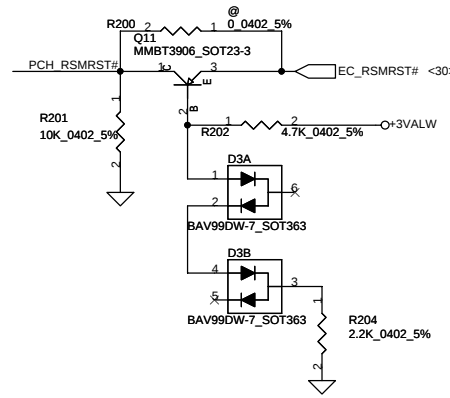



Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/08/01	Deciphered Date	2010/08/01	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size	Document Number
				Custom	401826
				Date	Tuesday, June 22, 2010
				Sheet	15 of 49
				Rev	C

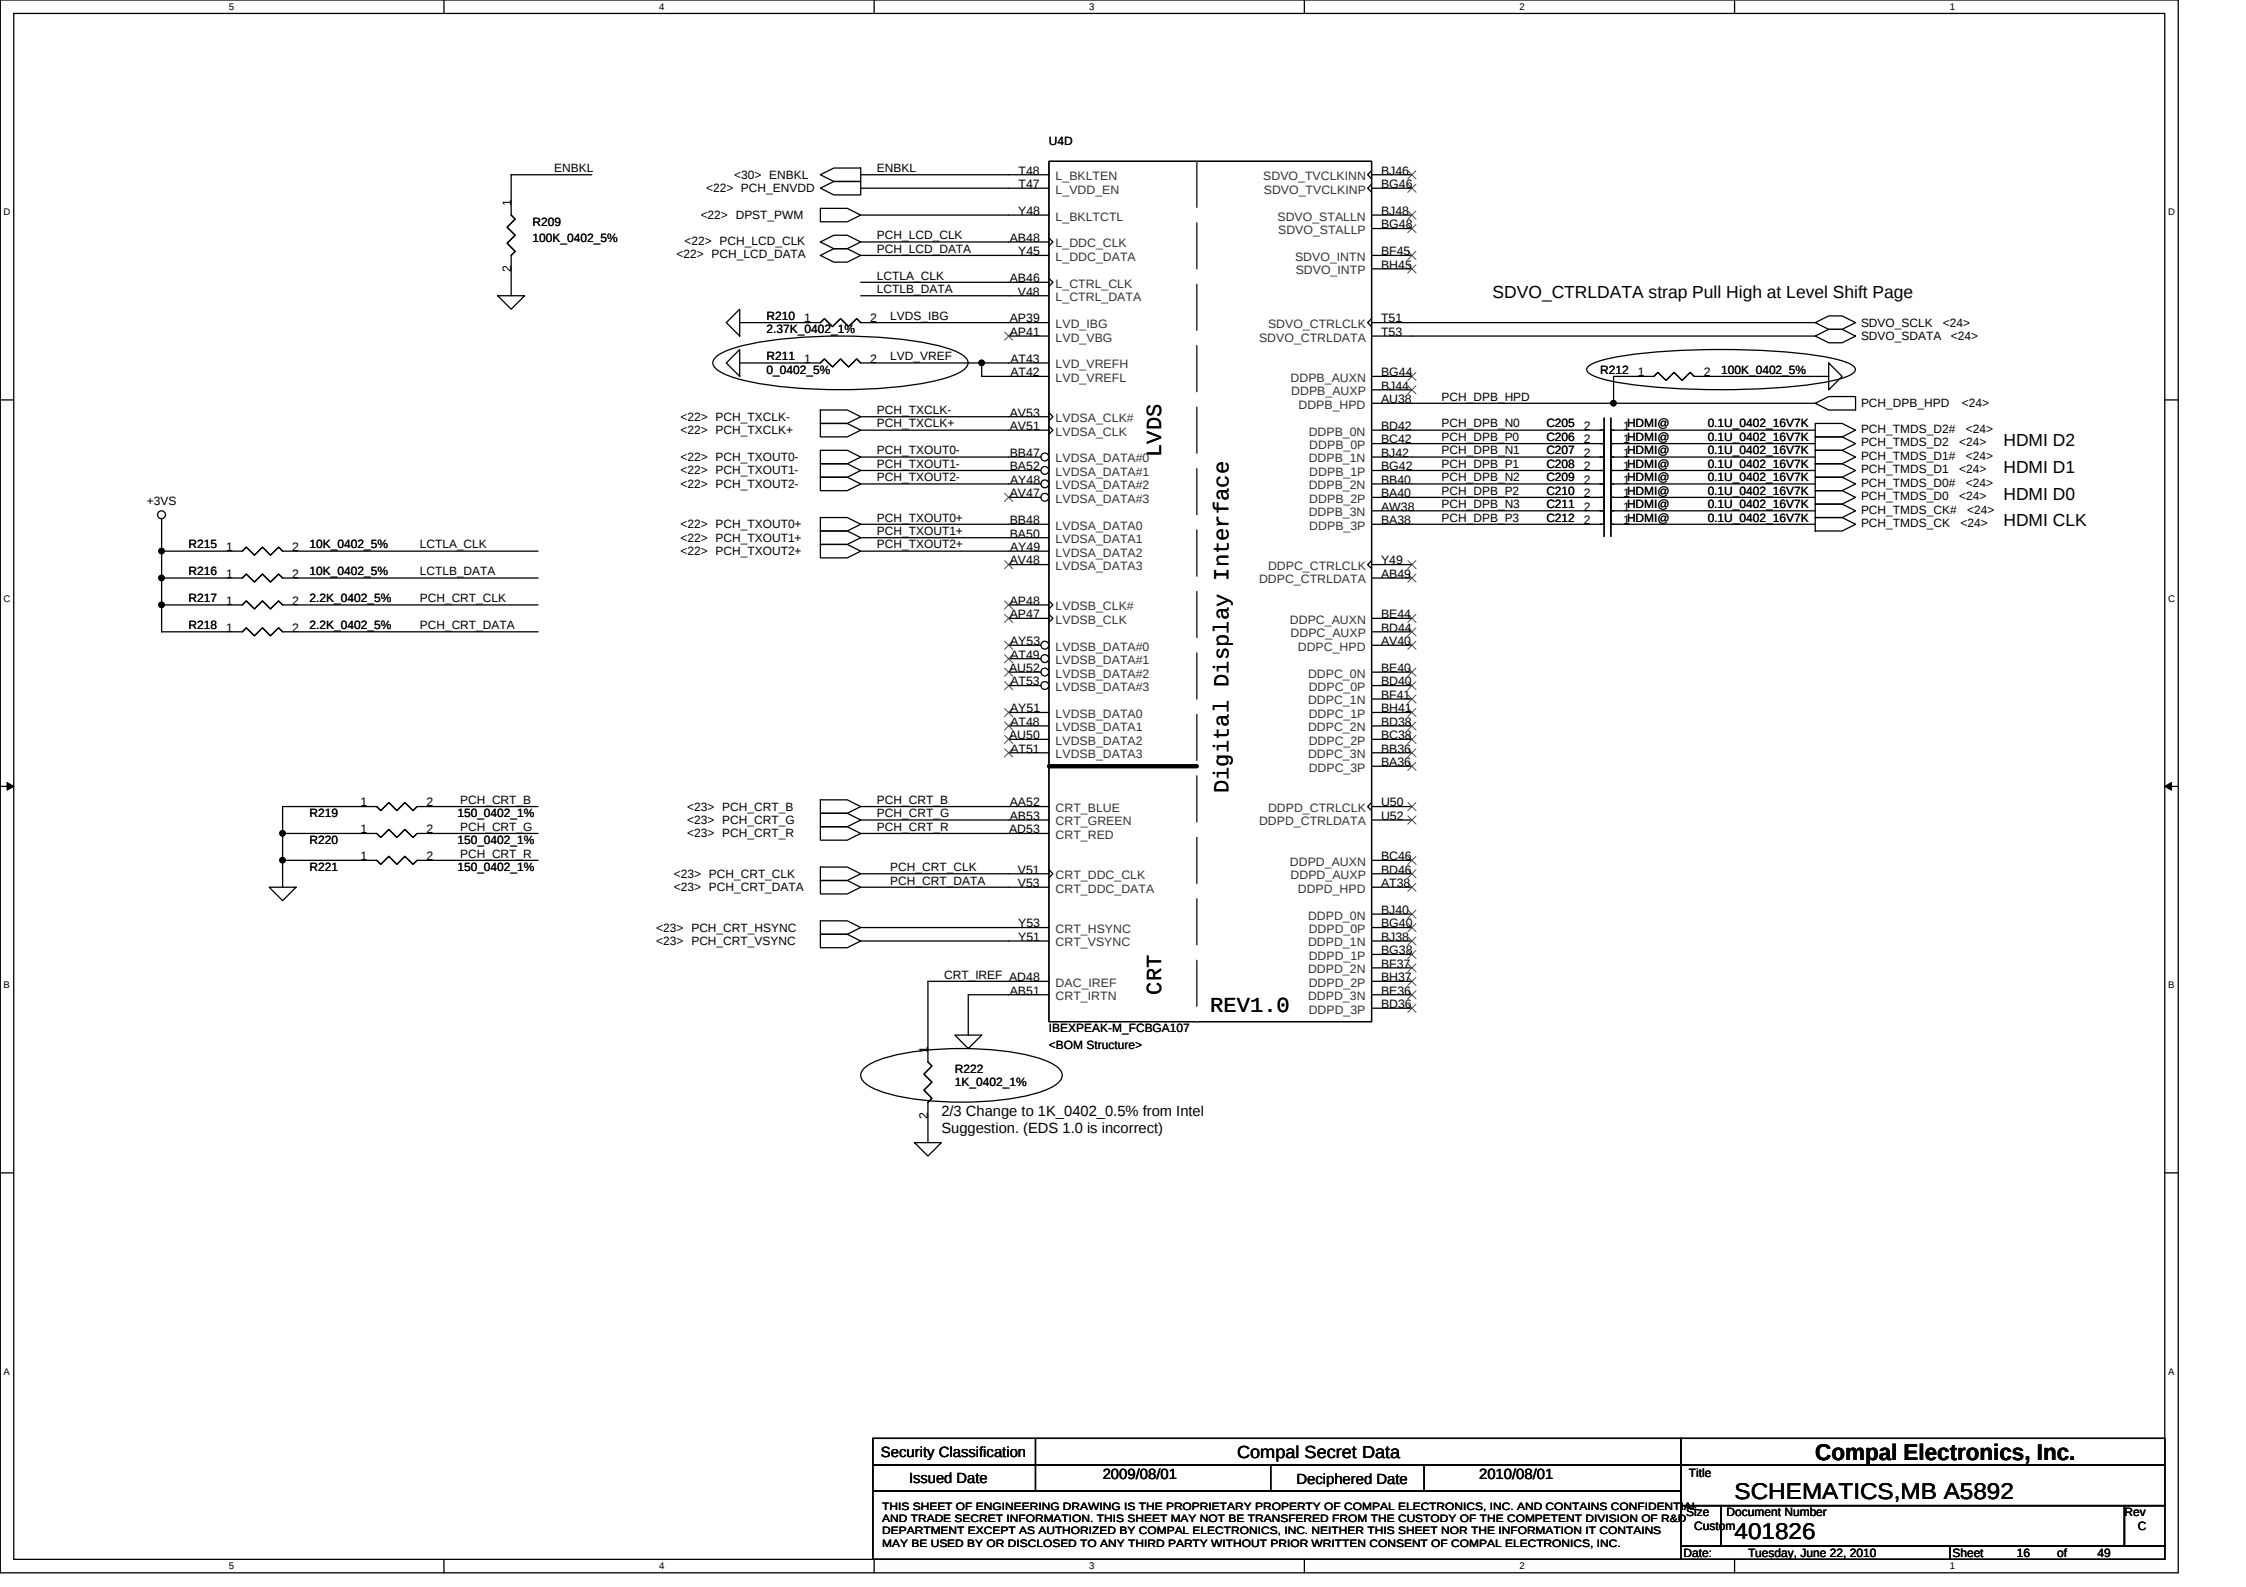

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/08/01	Deciphered Date	2010/08/01	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date	Tuesday, June 22, 2010
				Sheet	16 of 49
				Rev	C

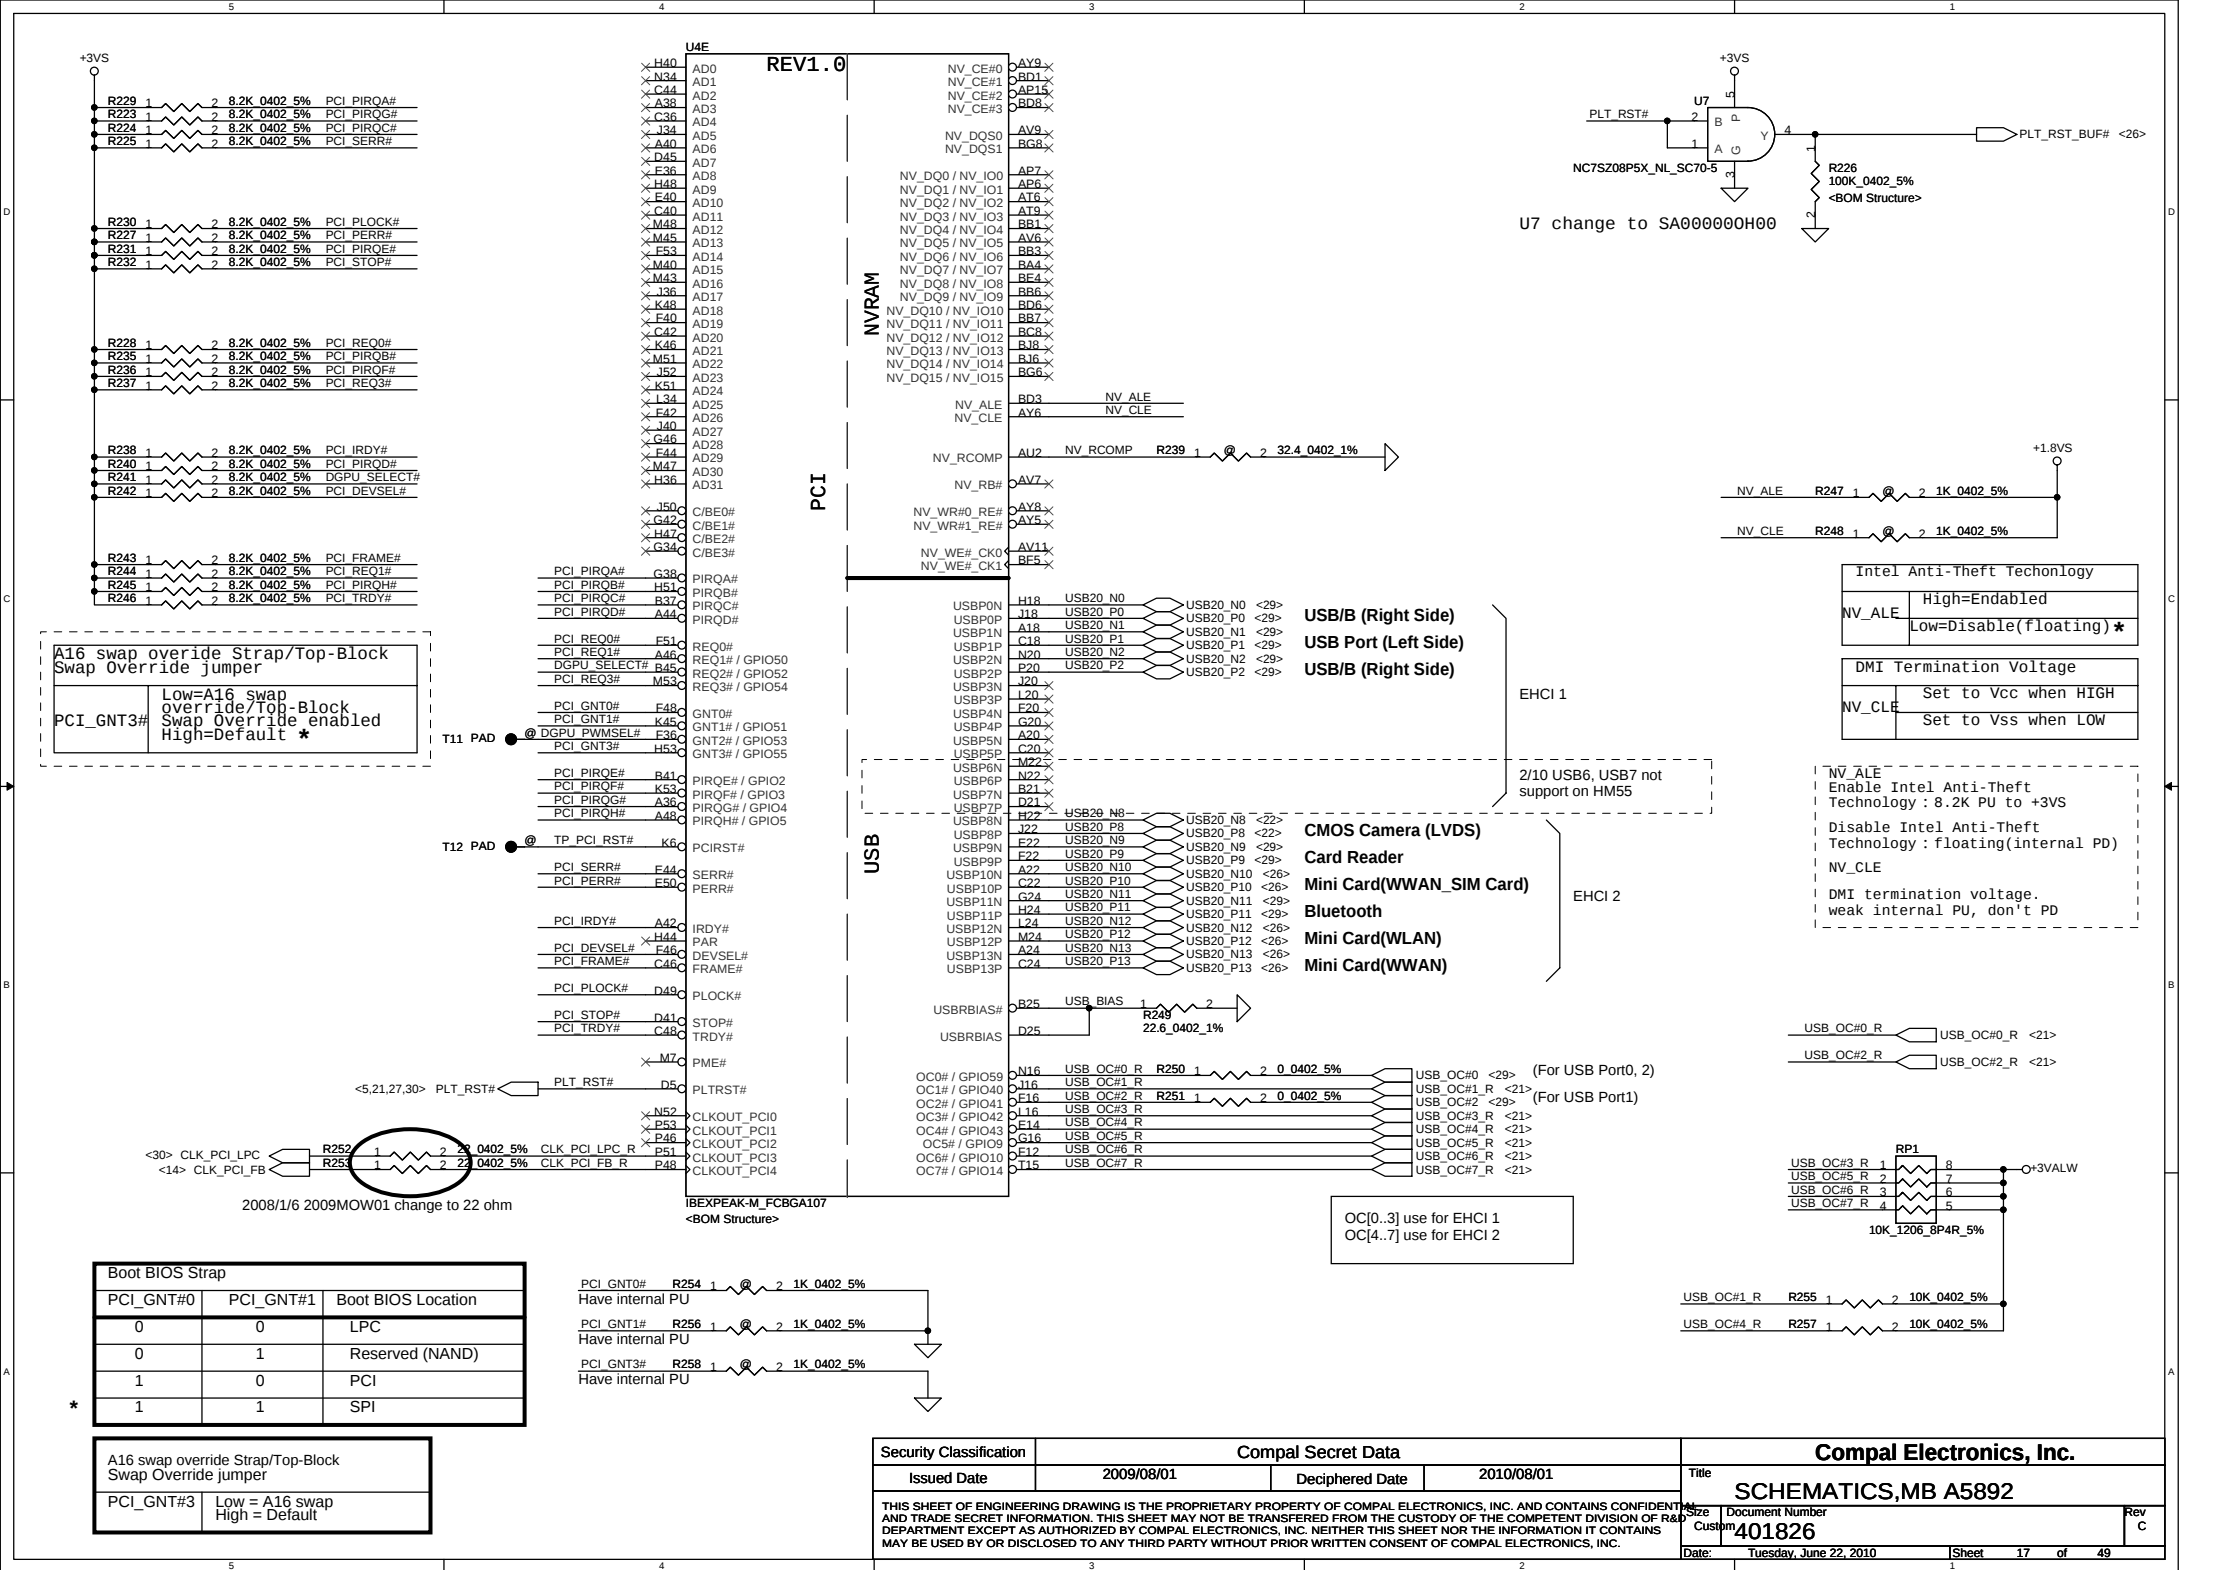

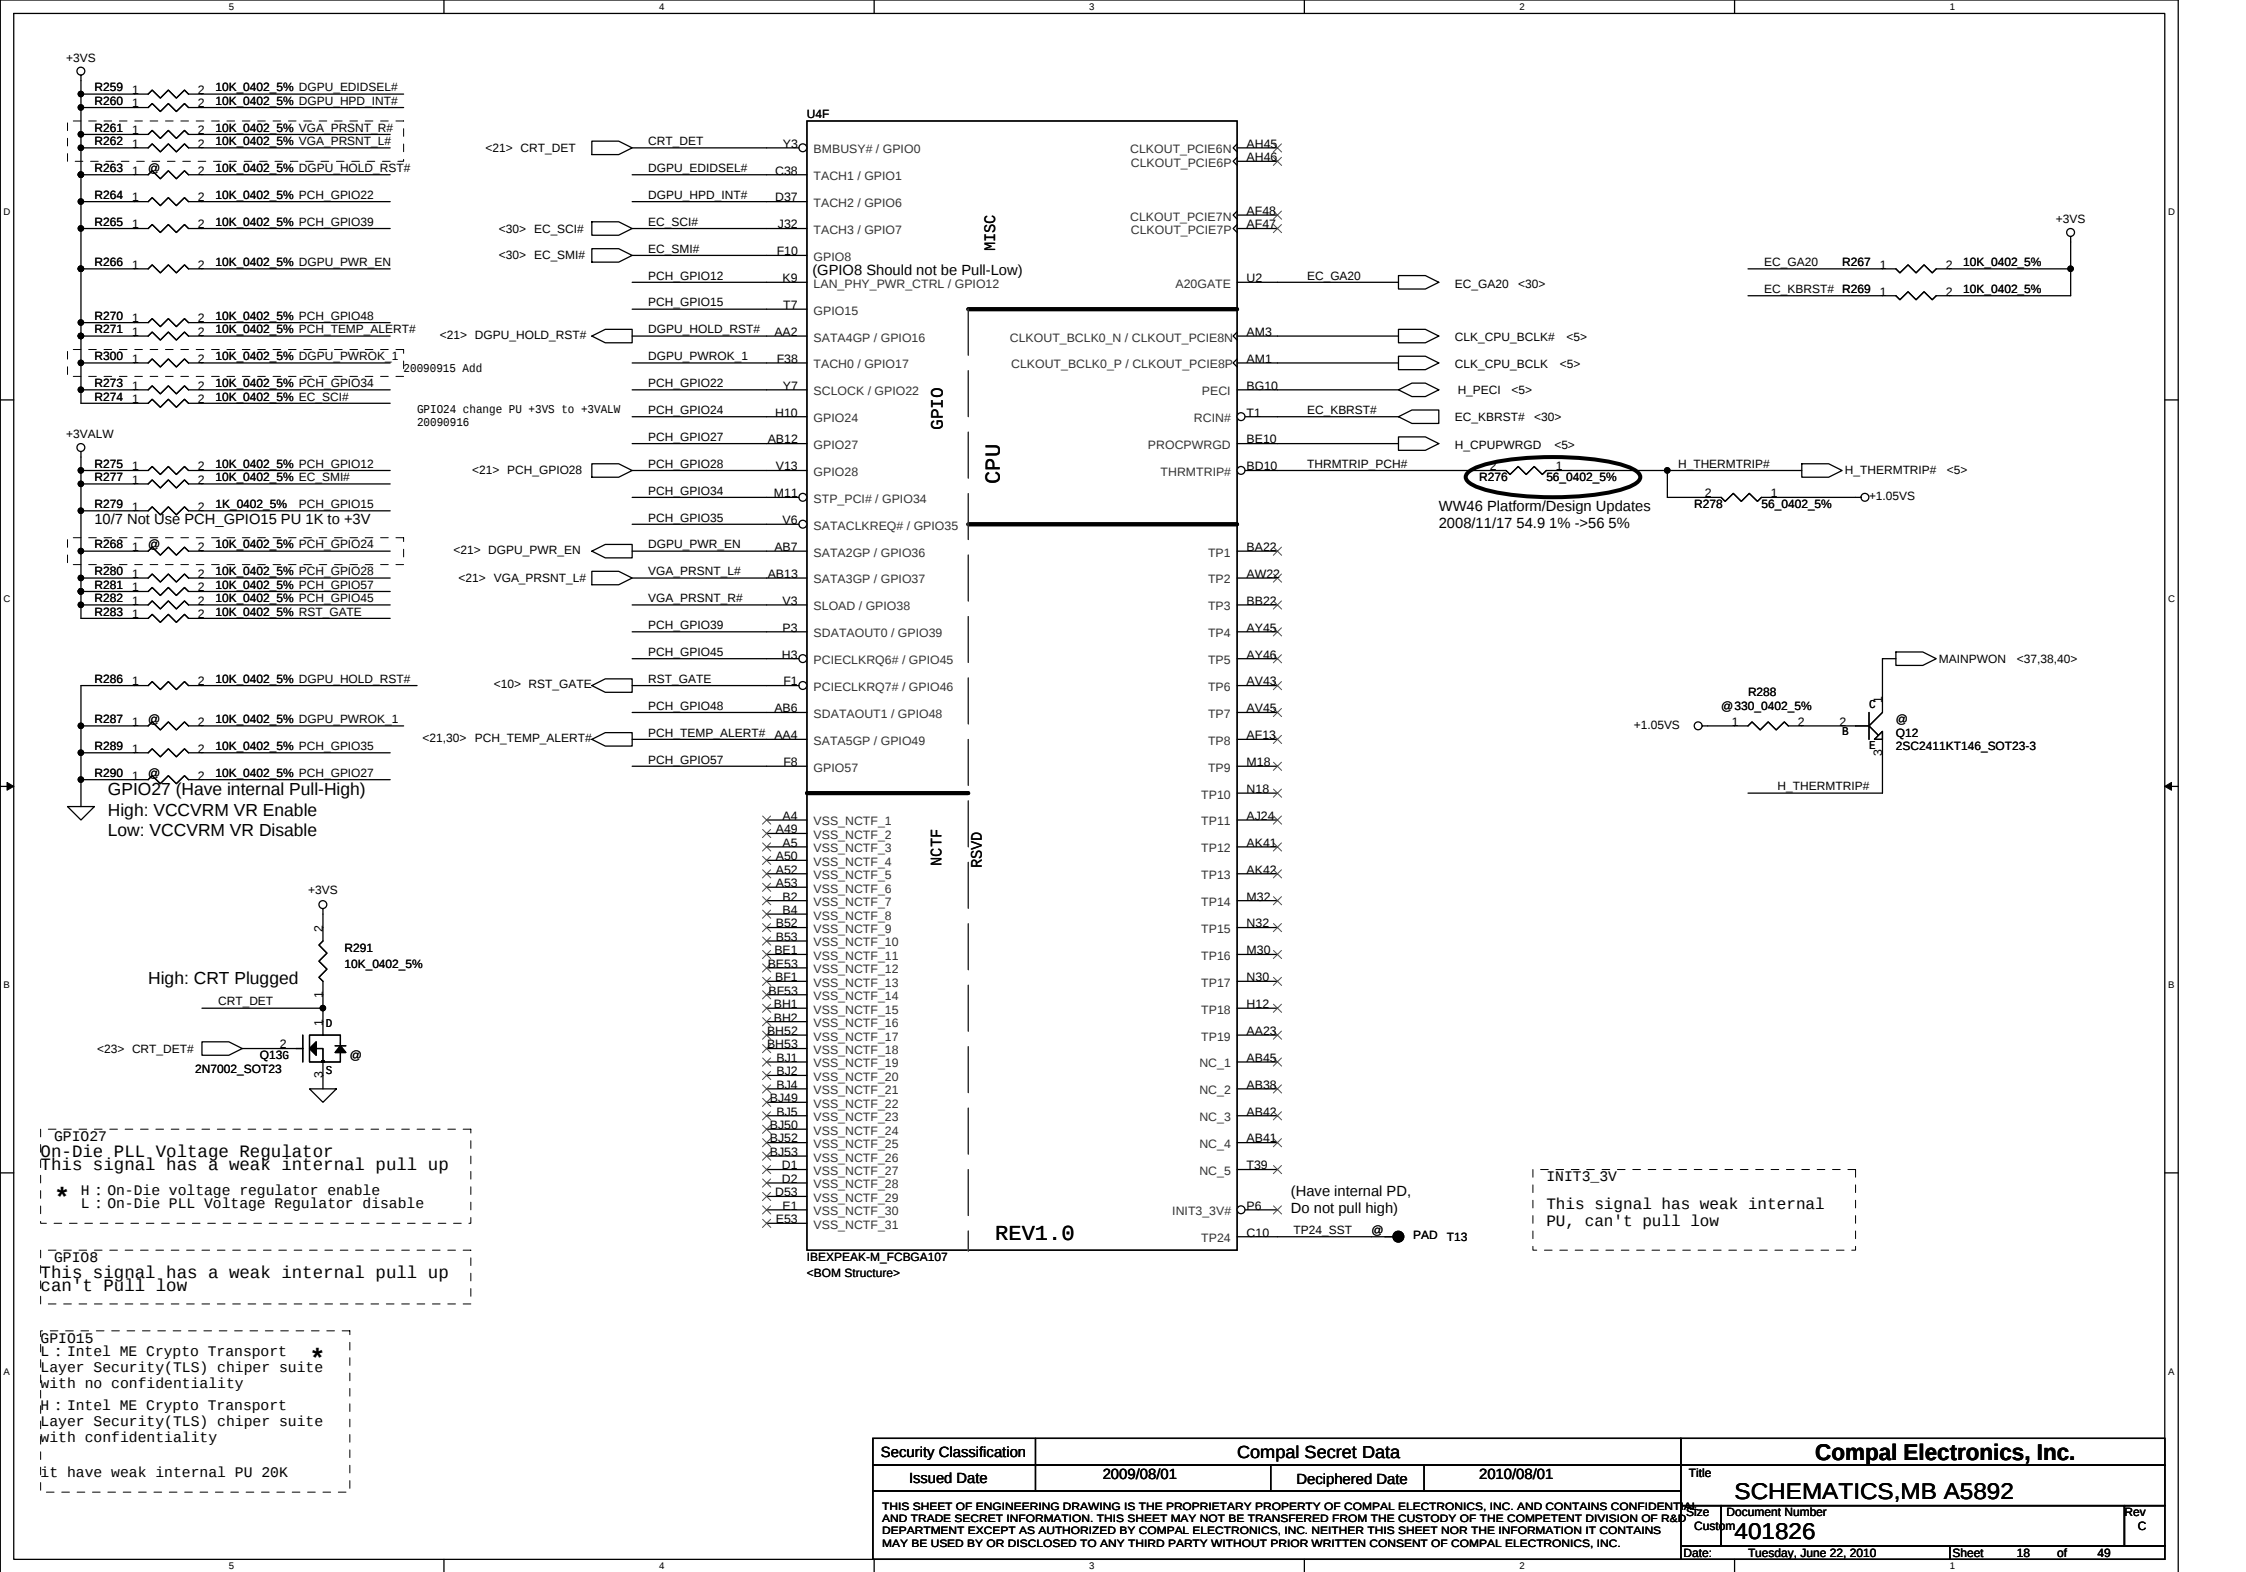



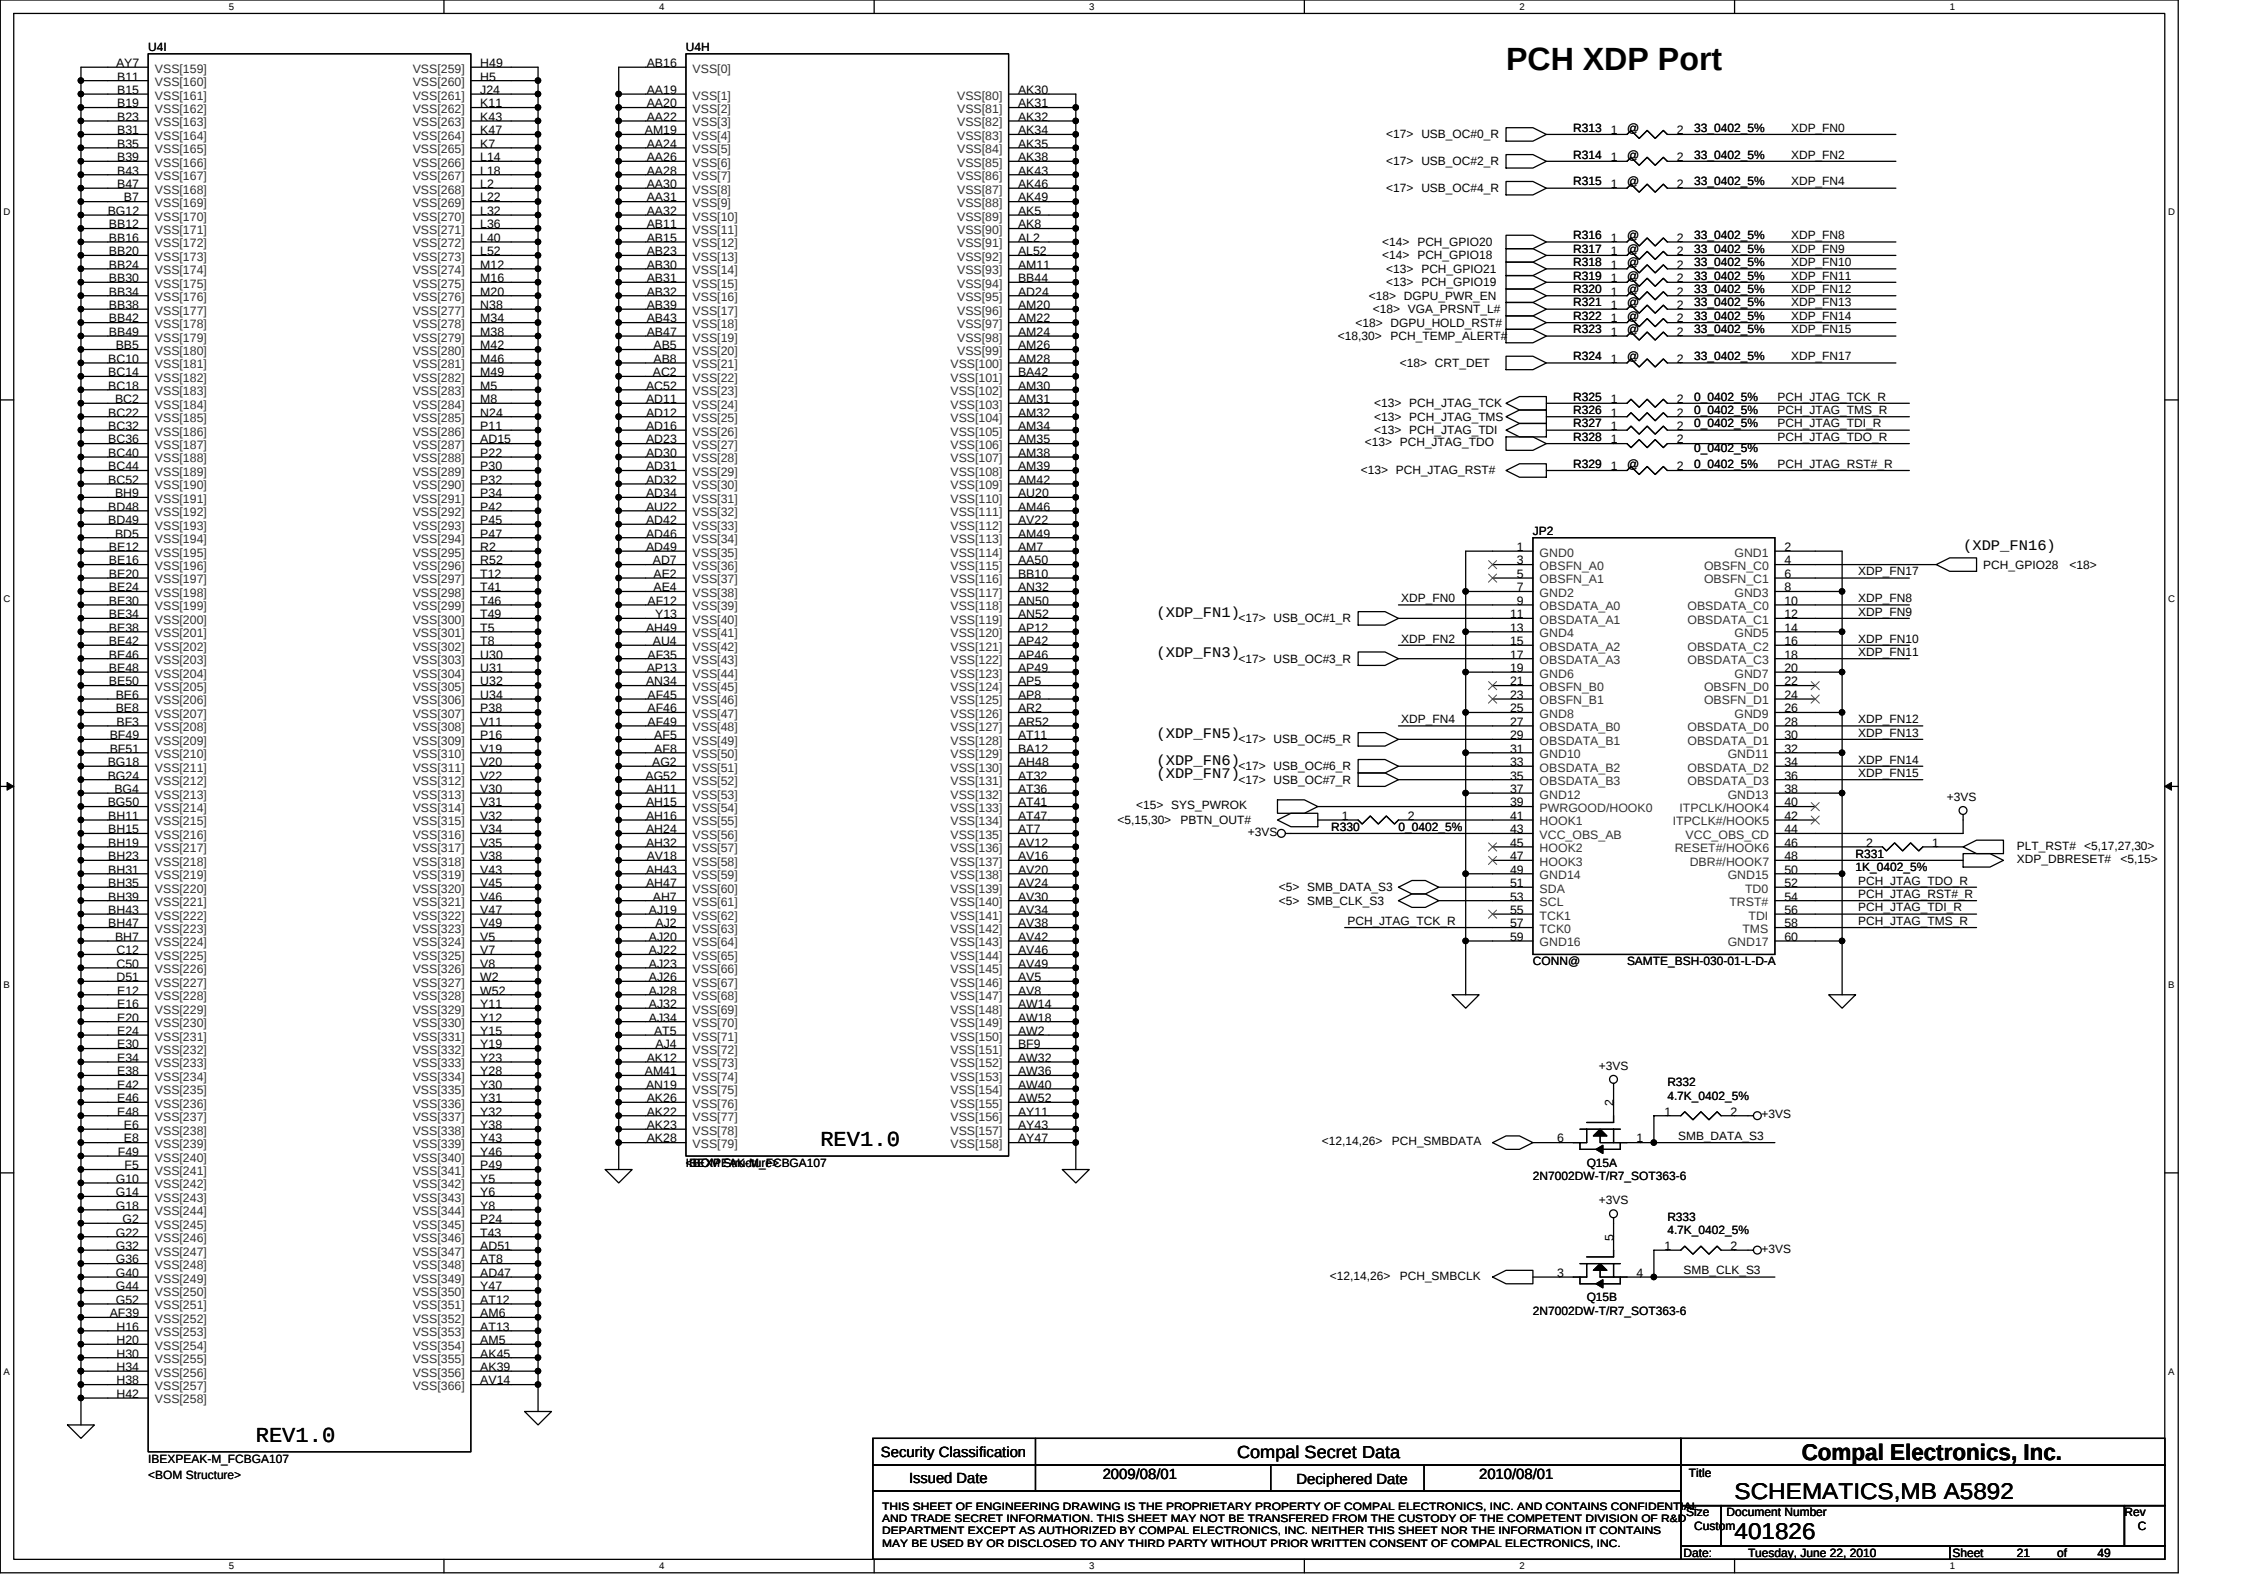


LCD POWER CIRCUIT

W=60mils


Q17 change to SB934130020

W=60mils

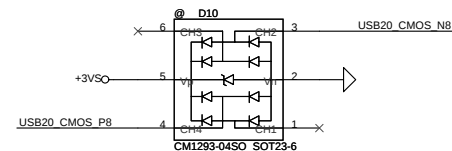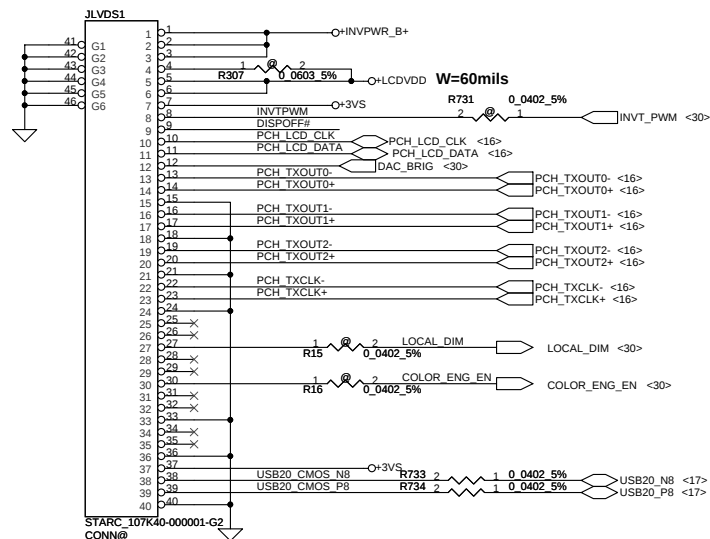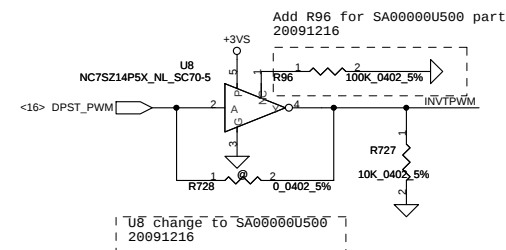







Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2010/04/15	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Doc No	
				Cust No	401826
				Date:	Tuesday, June 22, 2010
				Sheet	22 of 49

CRT Connector


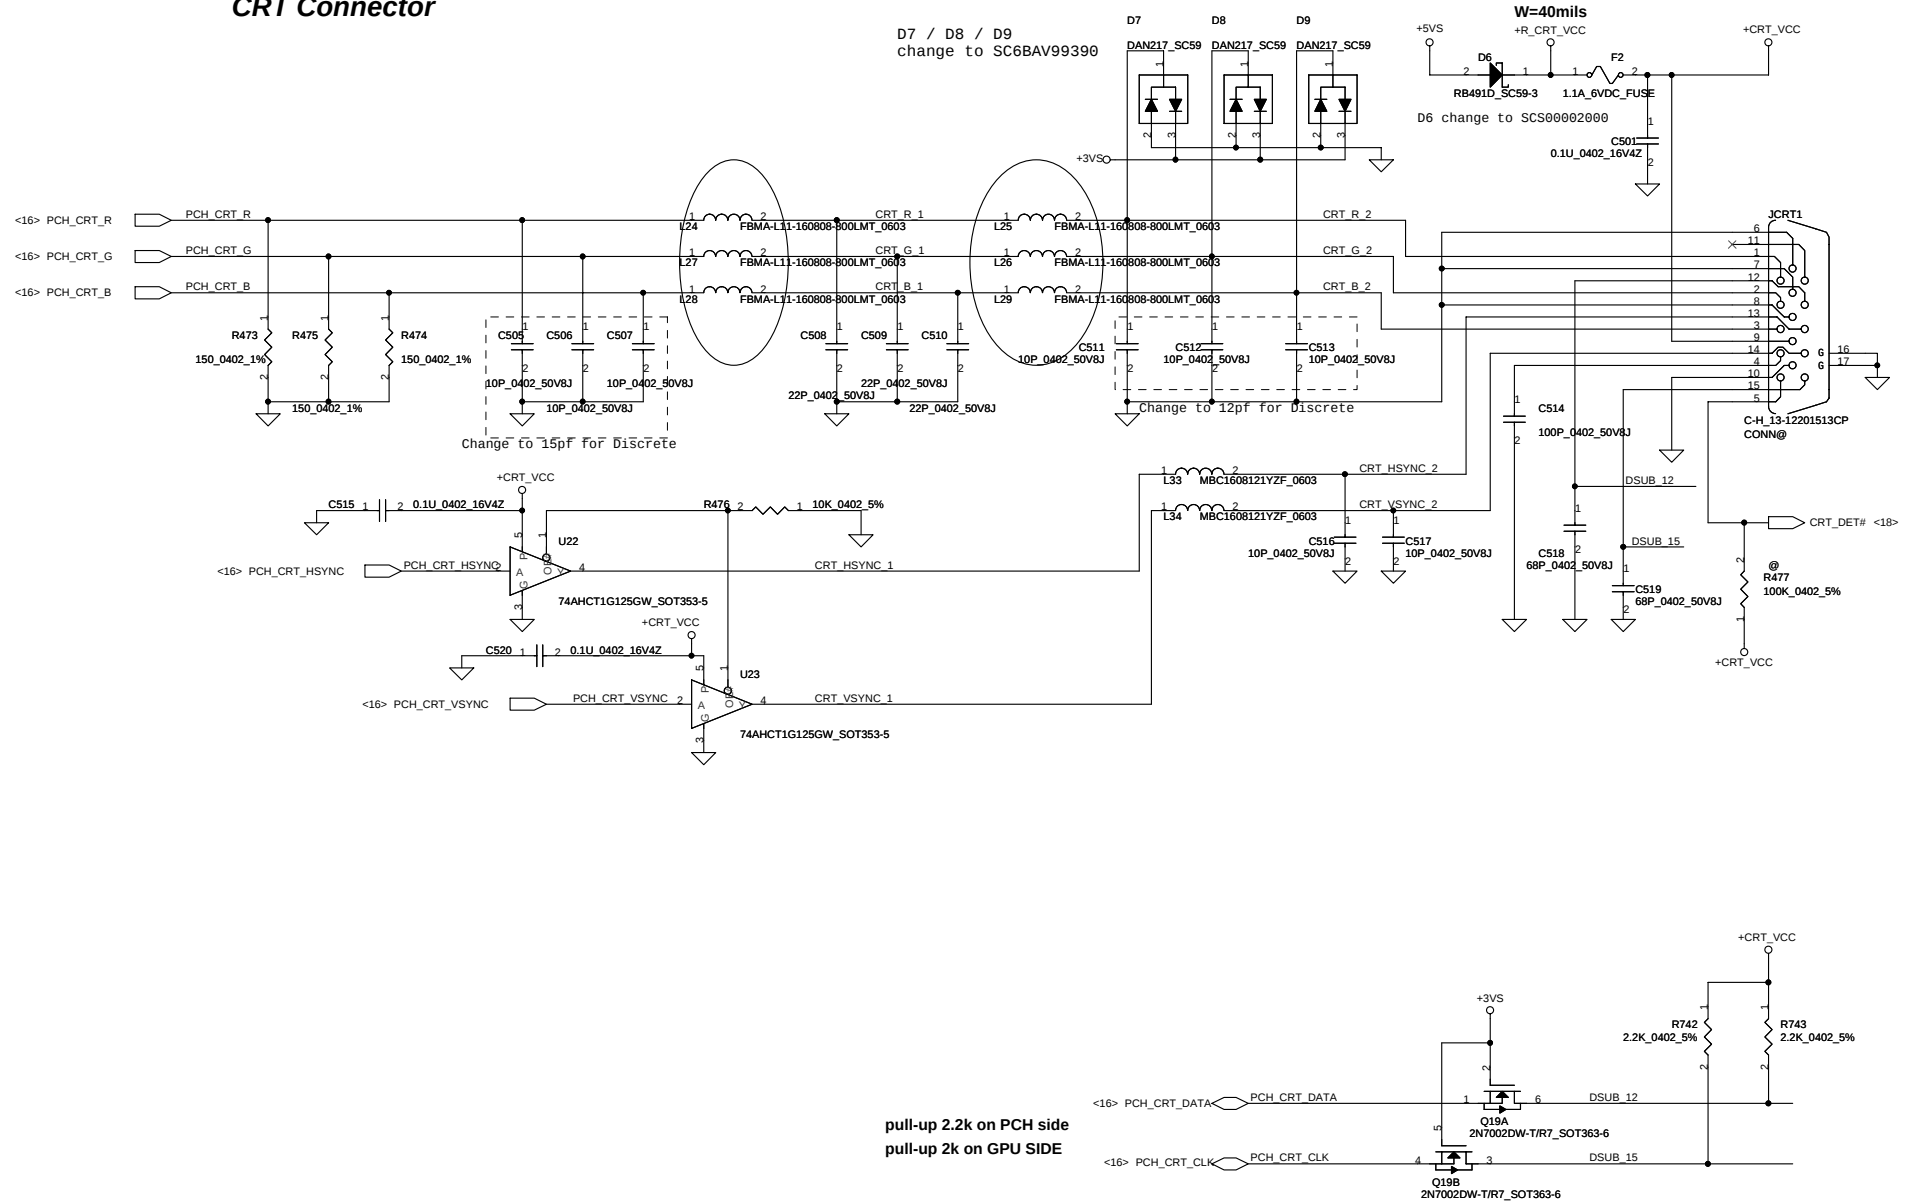


Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2010/04/15	SCHEMATICS, MB A5892	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number 401826	Rev C
Date: Tuesday, June 22, 2010				Sheet 23 of 49	



CG0	CG1	CG2	Swing	Pre-amp	Slew-rate
0	0	0	450	0	0
0	0	1	420	0	-3db
0	1	0	450	0	-3db (default)
0	1	1	460	0	-4db
1	0	0	340	0	0
1	0	1	400	2db	0
1	1	0	400	2db	0
1	1	1	420	0	0

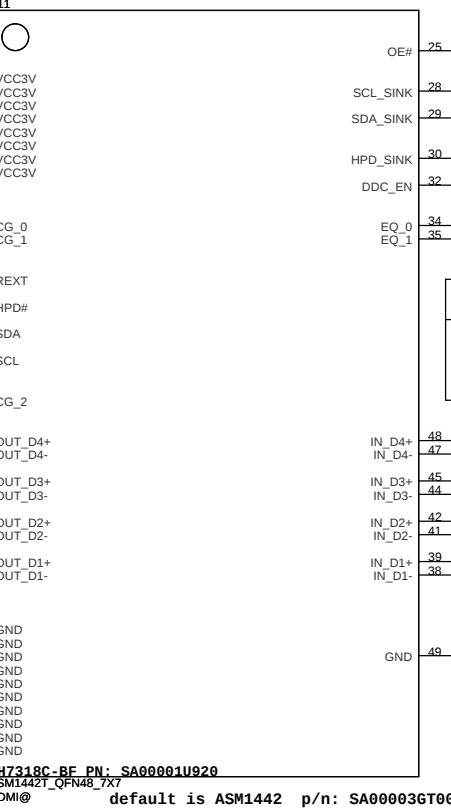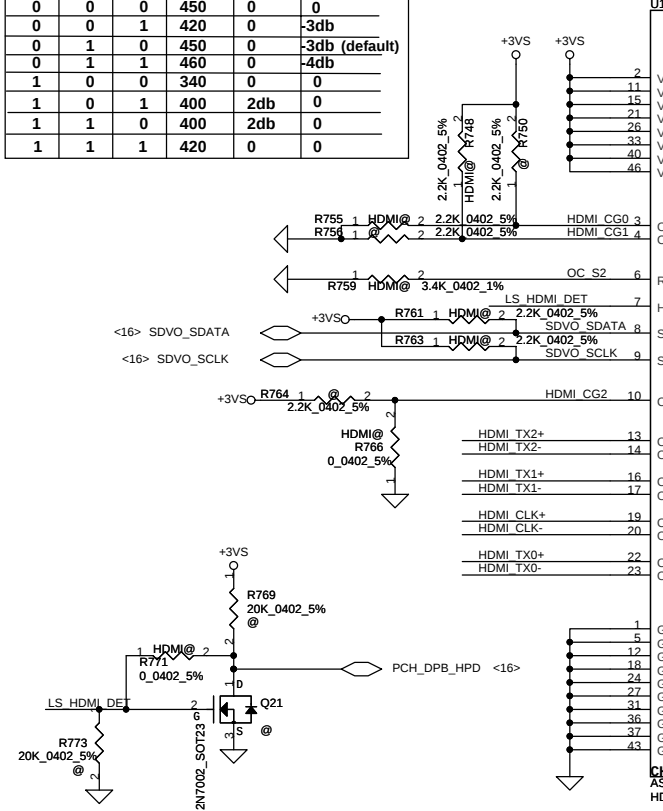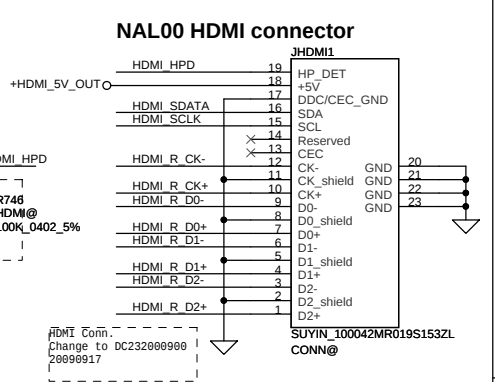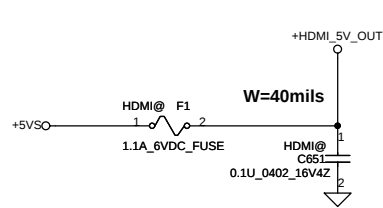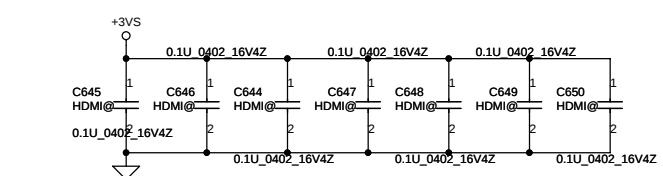


EQ0	EQ1	Equalization
0	0	12dB
0	1	9dB
1	0	6dB
1	1	3dB (default)

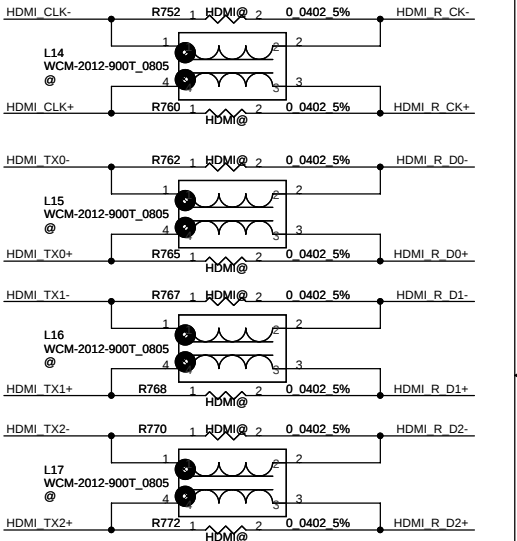

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/4/15	Deciphered Date	2010/04/15	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date	Tuesday, June 22, 2010
				Sheet	24 of 49

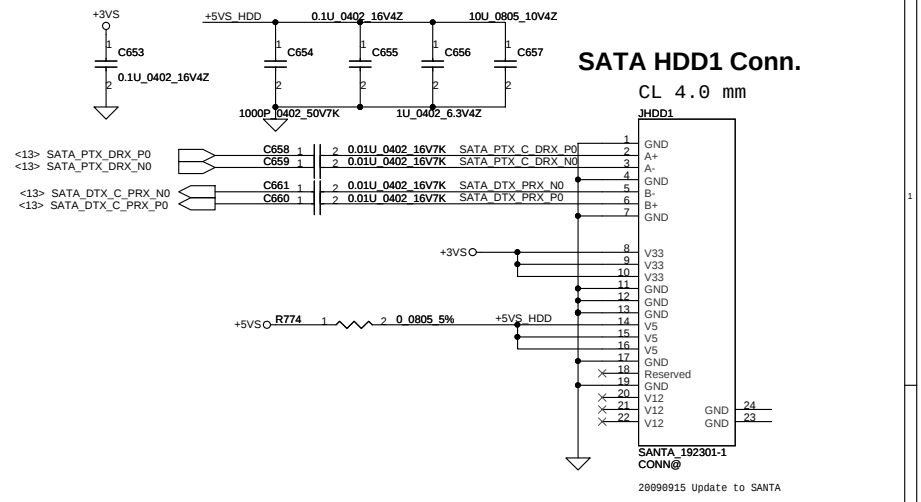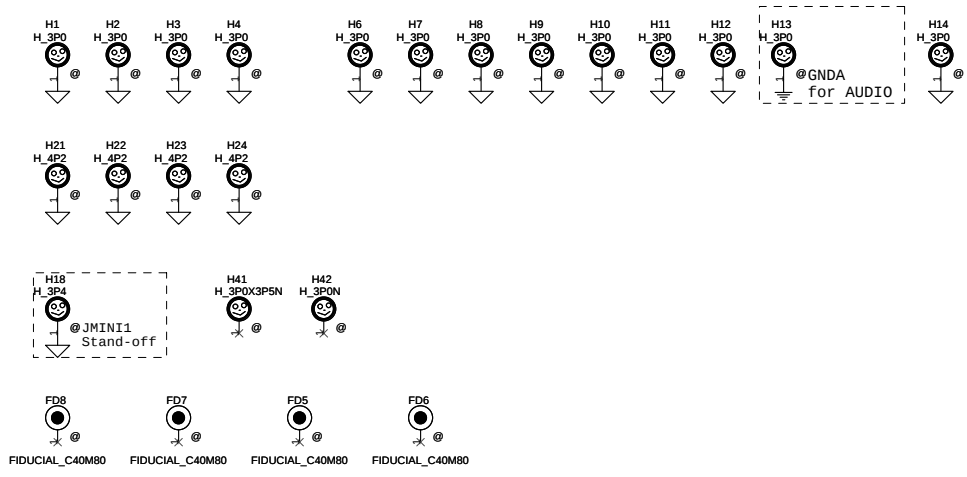


For Wireless LAN

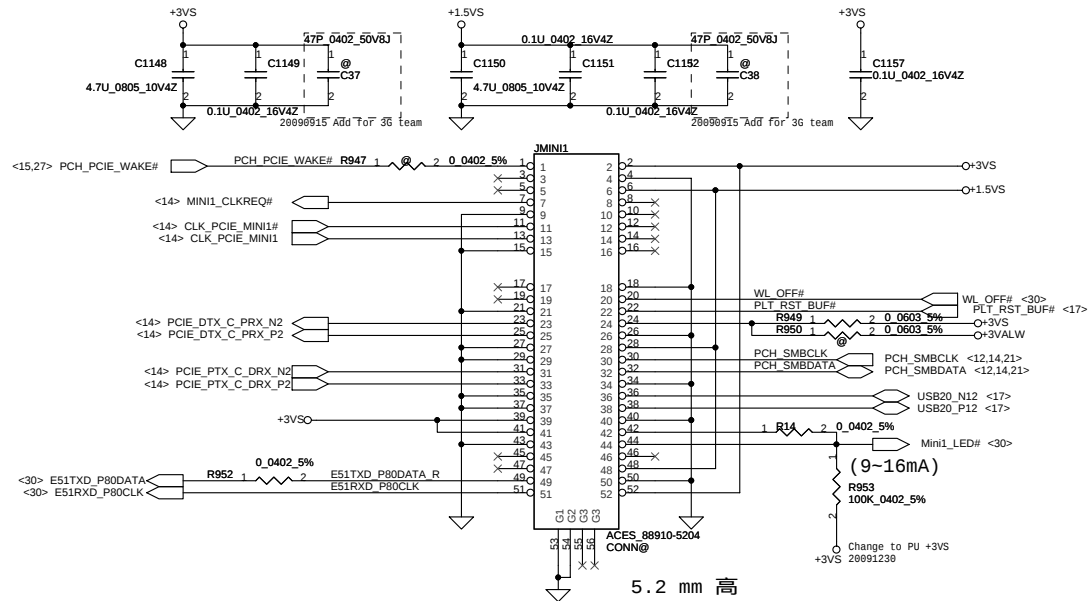


Mini Card Power Rating

Power	Primary Power (mA)		Auxiliary Power (mA)
	Peak	Normal	Normal
+3VS	1000	750	
+3V	330	250	250 (wake enable)
+1.5VS	500	375	5 (Not wake enable)



To 3G / GPS Module Connect

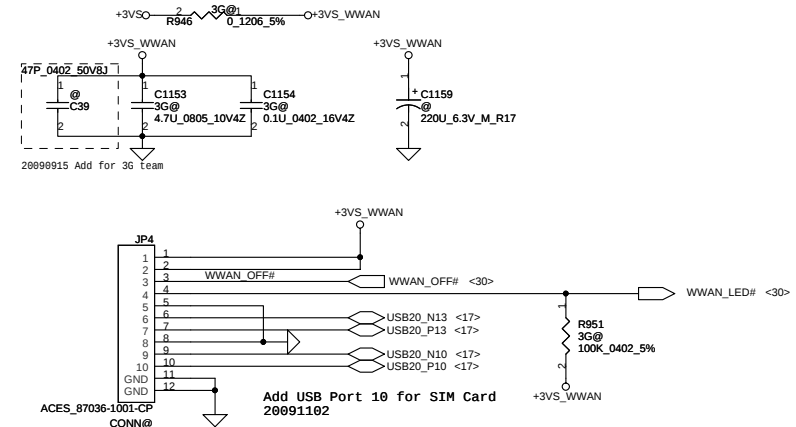



FAN1 Conn

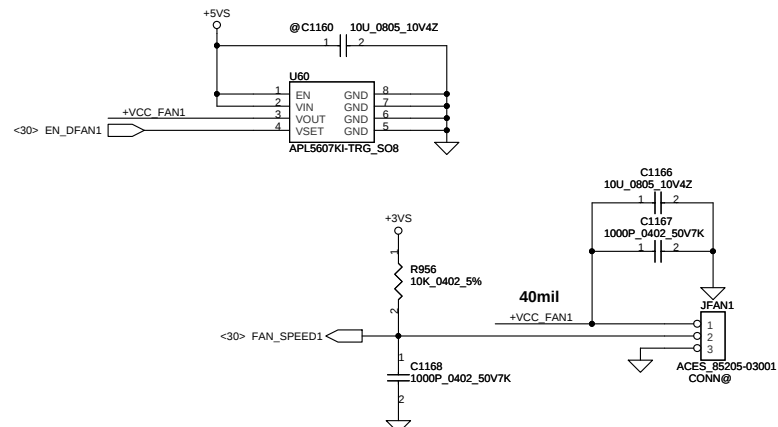

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2007/12/25	Title	SCHMATIC,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date	Tuesday, June 22, 2010
				Sheet	26 of 49


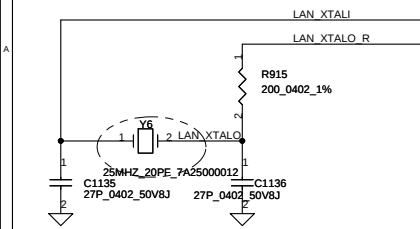


	SPROM_CLK (EECLK)	SPROM_DOUT (EEDATA)
On chip	1	0
AT24C02	1	1

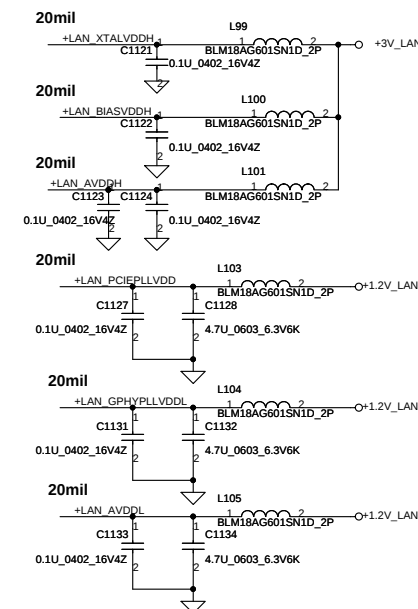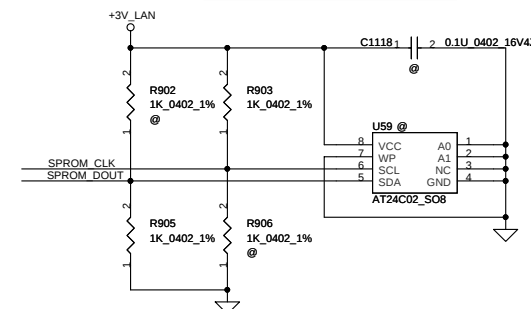


Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2008/08/10	Deciphered Date	2009/08/10	Title	SCHEMATICS,MB A5892	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Doc No	Document Number	Rev
				Custid	401826	C
				Date:	Tuesday, June 22, 2010	Sheet 27 of 49

LAN Connector



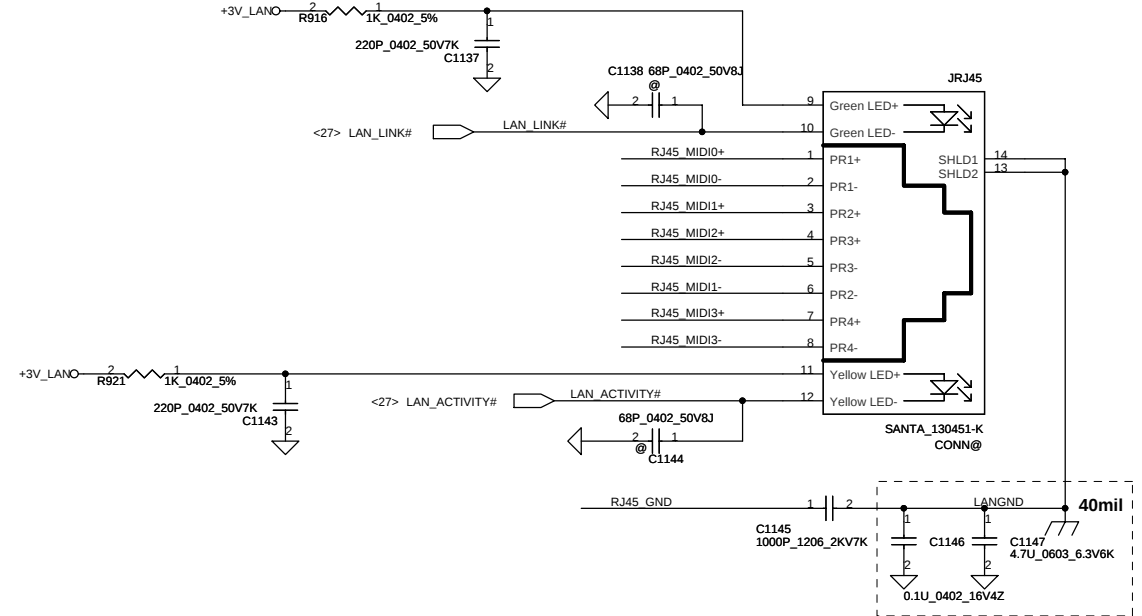
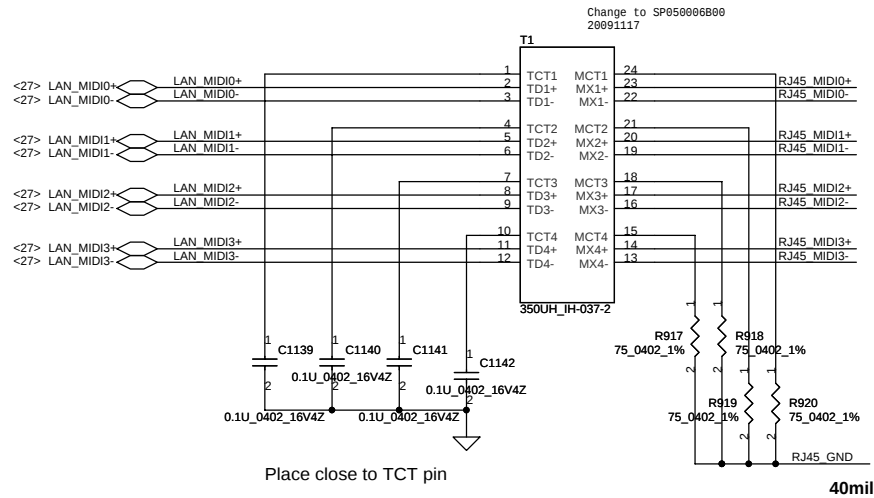


Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2008/08/10	Deciphered Date	2009/08/10	Title	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				SCHEMATICS,MB A5892	
Date		Tuesday, June 22, 2010		Sheet	28 of 49

Card Reader Conn.

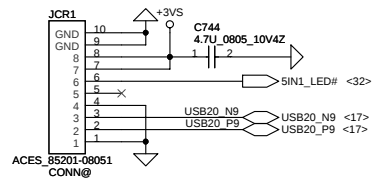


Bluetooth Conn.

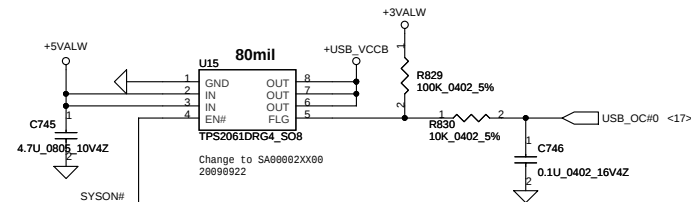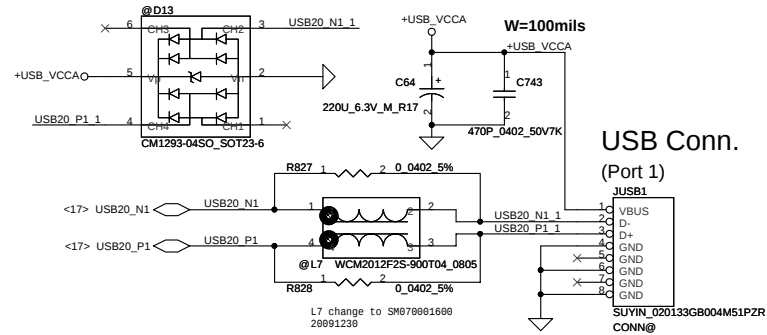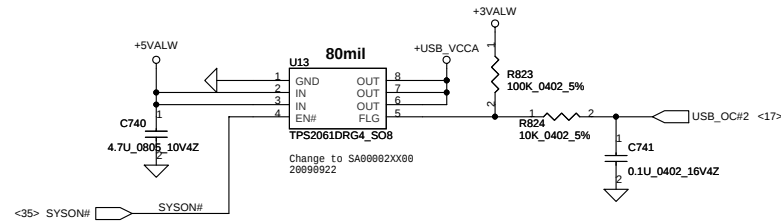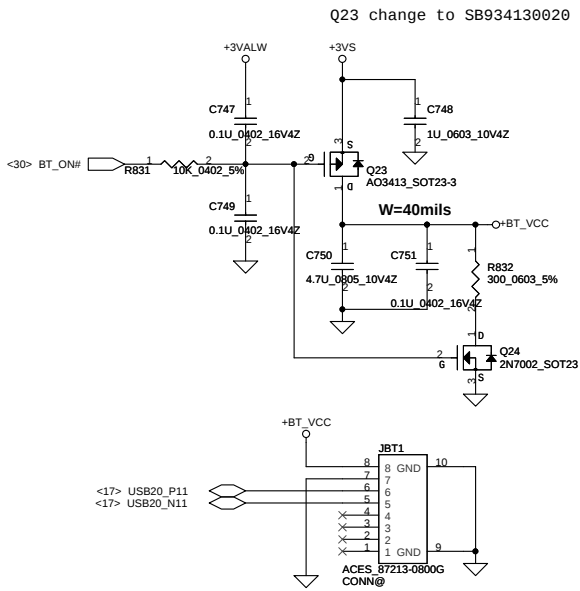





USB/B Conn.

(Port 0,2)

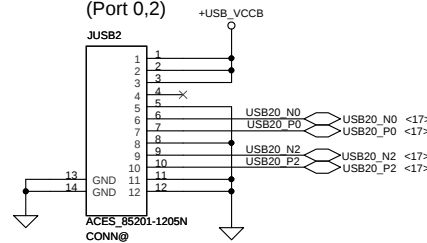

Security Classification				Compal Secret Data				Compal Electronics, Inc.			
Issued Date				Deciphered Date				Title			
2009/5/12				2009/12/31				SCHEMATICS,MB A5892			
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Date				Rev			
				Tuesday, June 22, 2010				C			
				Sheet				29 of 49			

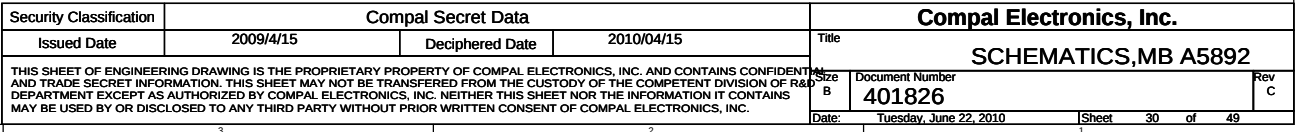

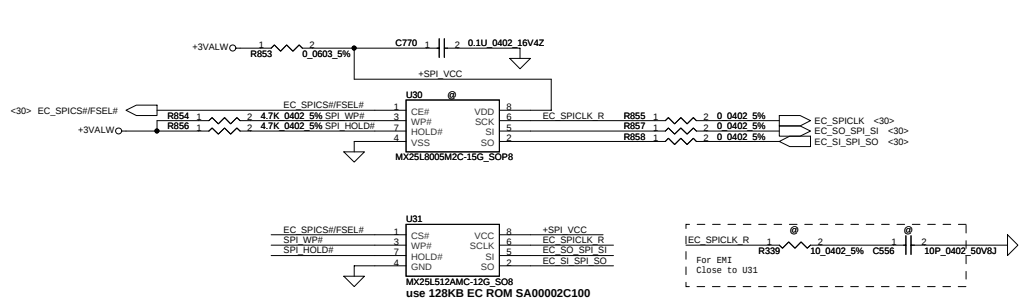
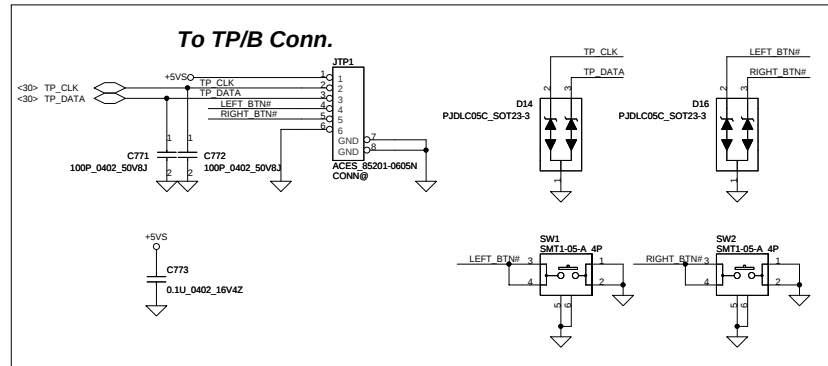
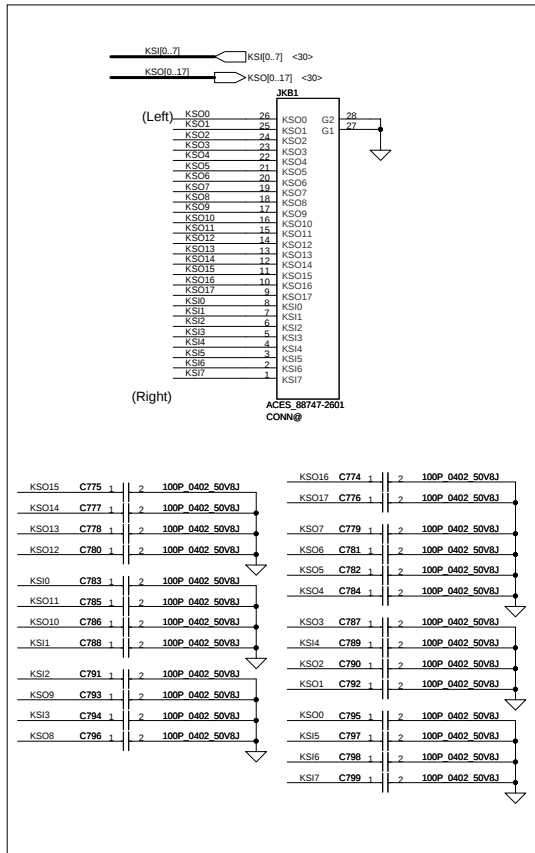


ENE suggestion SPI Frequency over 66MHz
SST: 50MHz
MXIC: 70MHz
ST: 40MHz


To BTN/B Conn.

KSO0	KSO3
KS11	WL_BTN#
KS12	T/P lock_BTN#
KS13	Back up_BTN#
KS14	BT_BTN#
KS15	Power save_BTN#


Power Button

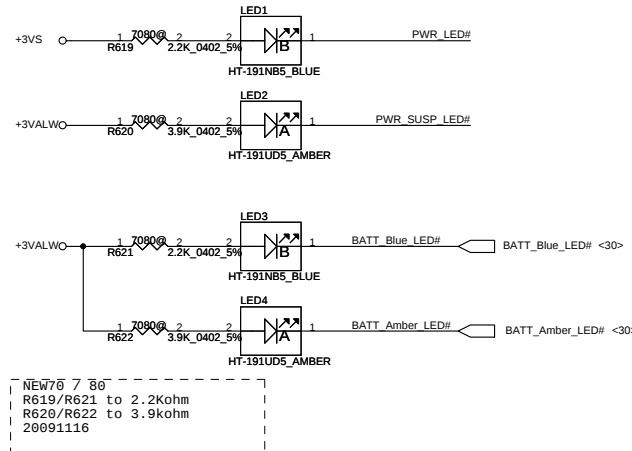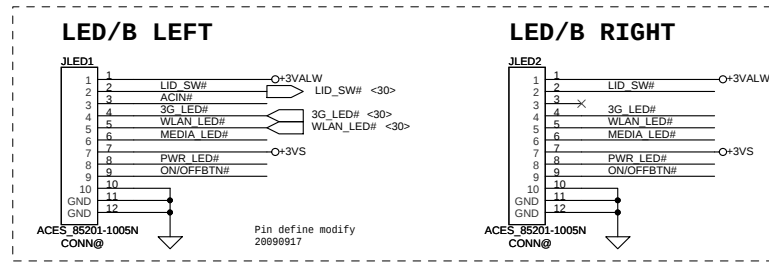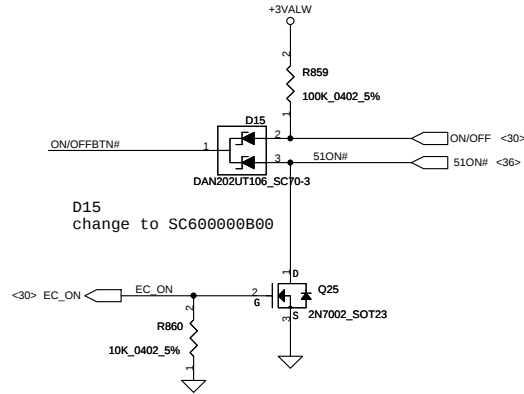



NEW70 7 80
R619/R621 to 2.2Kohm
R620/R622 to 3.9kohm
20091116

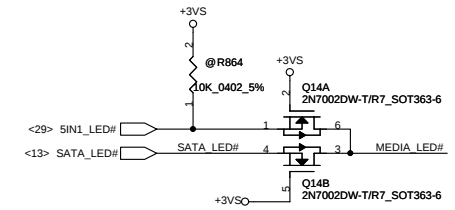



For NEW60 ACIN LED control
20091118

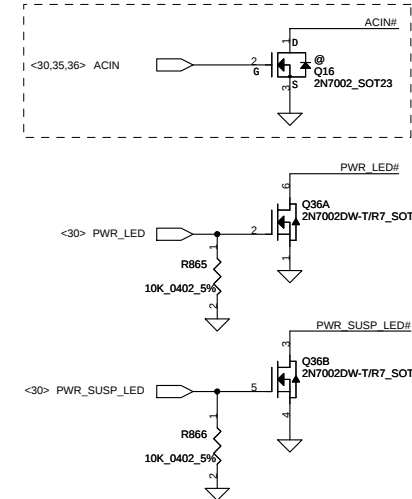

Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date	Tuesday, June 22, 2010
				Sheet	32 of 49


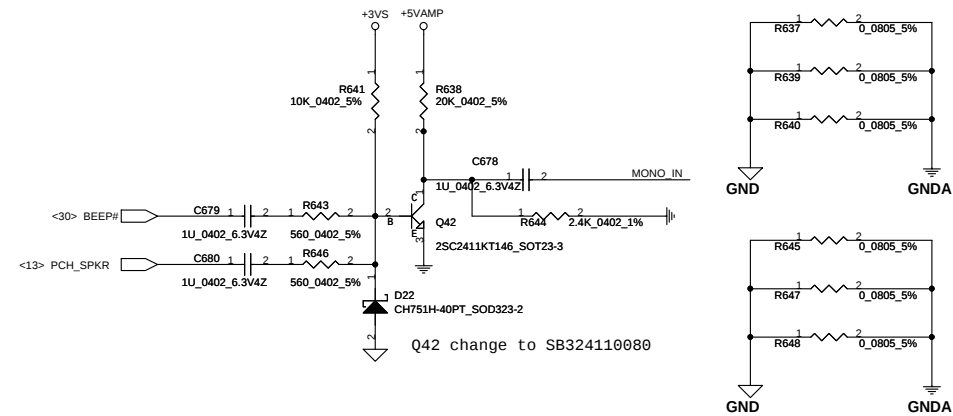
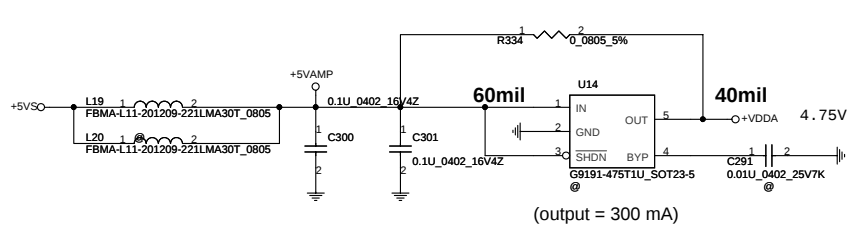


HD Audio Codec

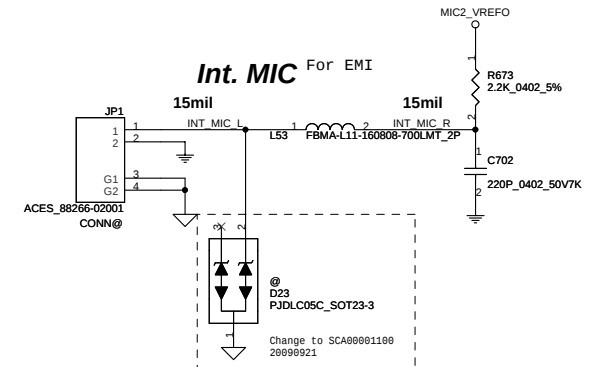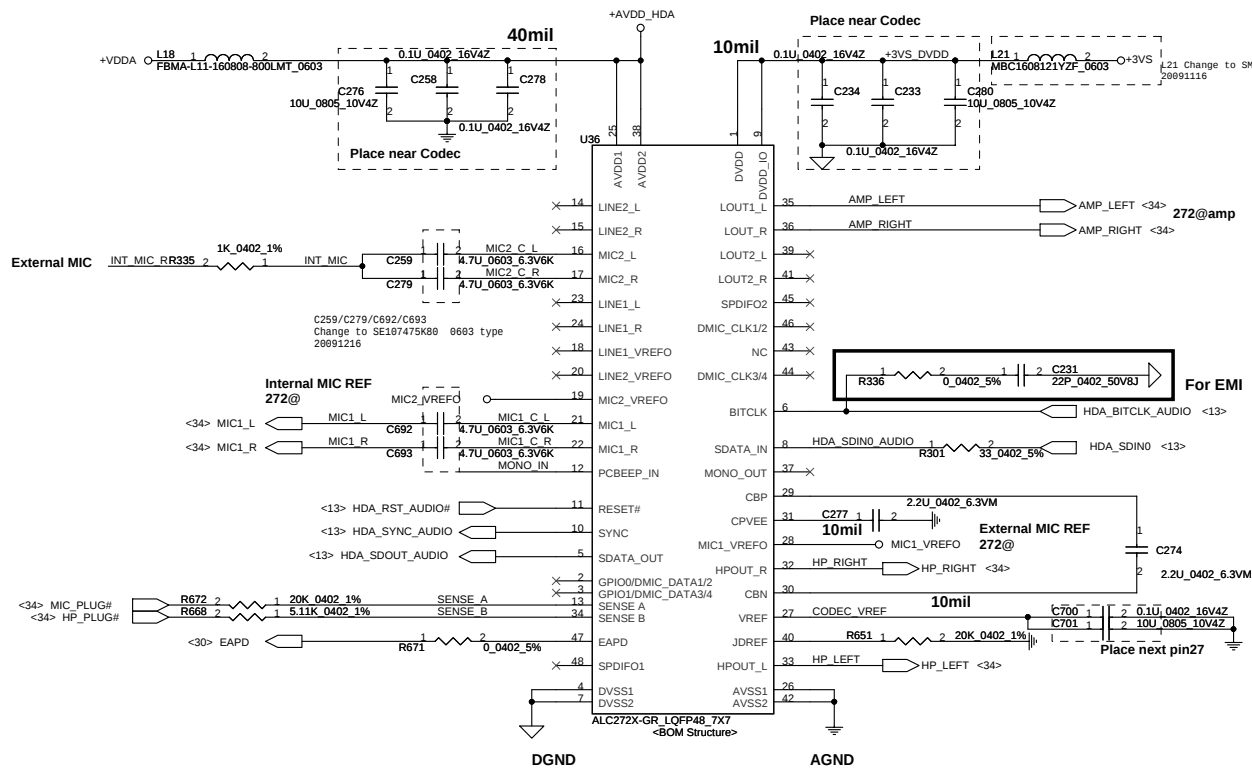


Security Classification		Compal Secret Data		Title	
Issued Date	2008/08/10	Deciphered Date	2009/08/10	Compal Electronics, Inc.	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	Rev
				401826	C
				Date: Tuesday, June 22, 2010	Sheet 33 of 49

GAIN0	GAIN1	AV(inv)	Ri
0	0	6dB	90k
0	1	10dB	70k
1	0	15.6dB	45k
1	1	21.6dB	25k

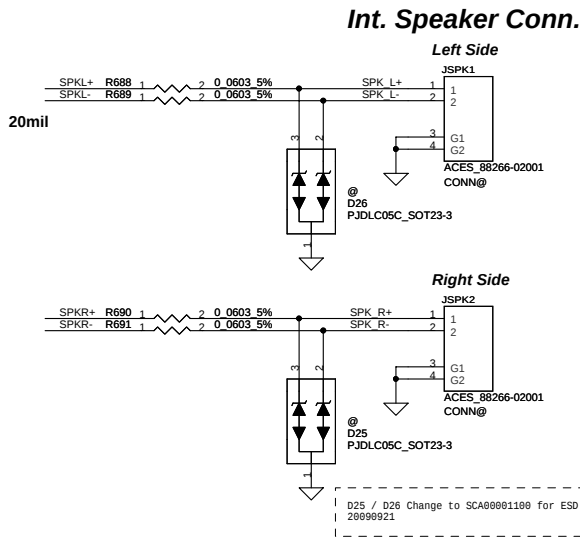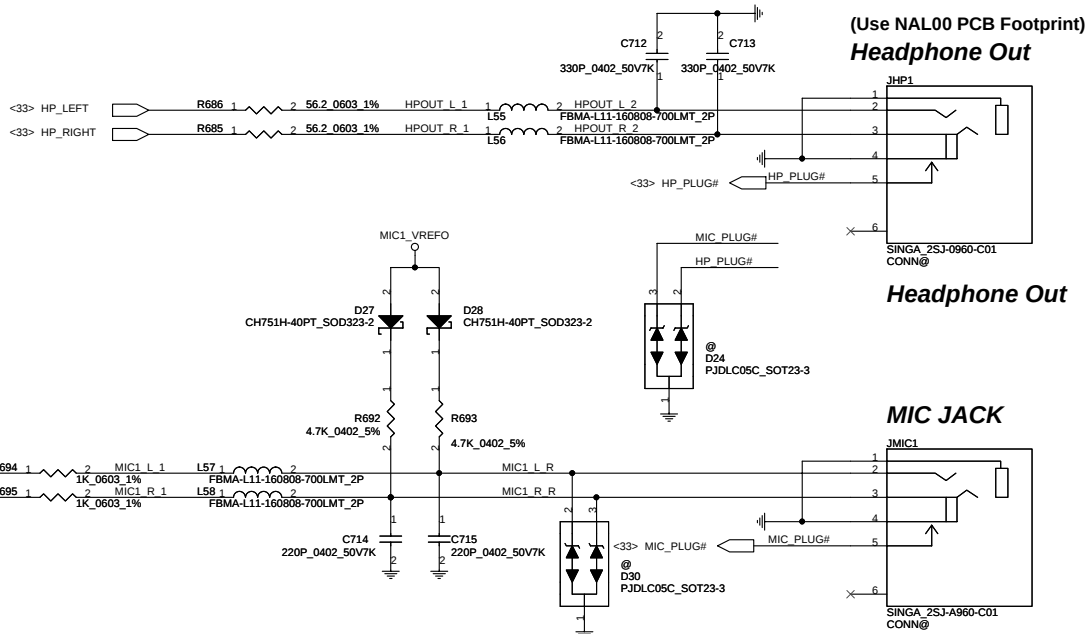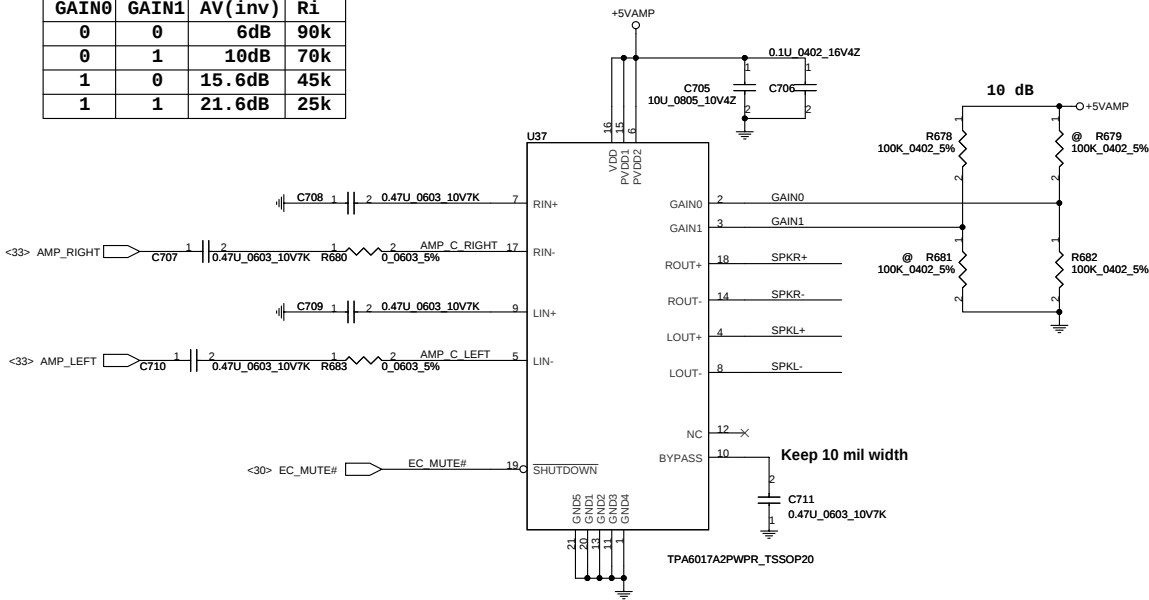


Security Classification	Compal Secret Data		Title	
Issued Date	2008/08/10	Deciphered Date	2009/08/10	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Rev C
Date: Tuesday, June 22, 2010				Sheet 34 of 49






+5VALW TO +5VS

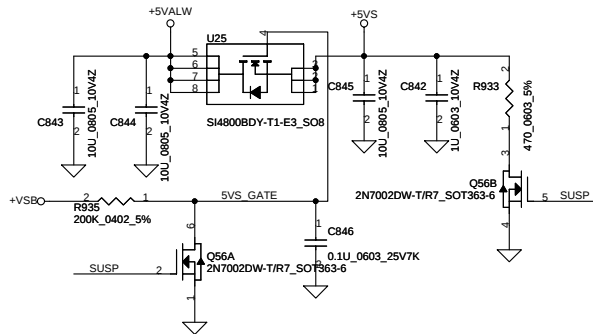


+3VALW TO +3VS

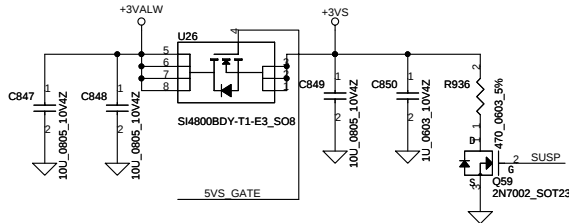


+1.5V to +1.5VS

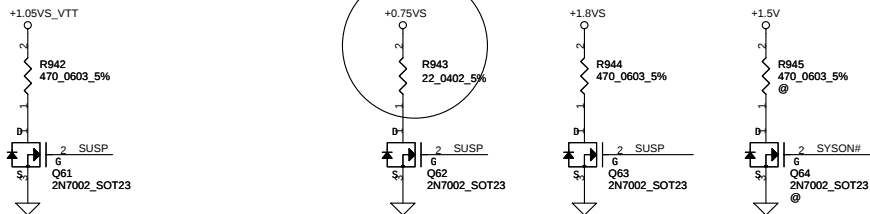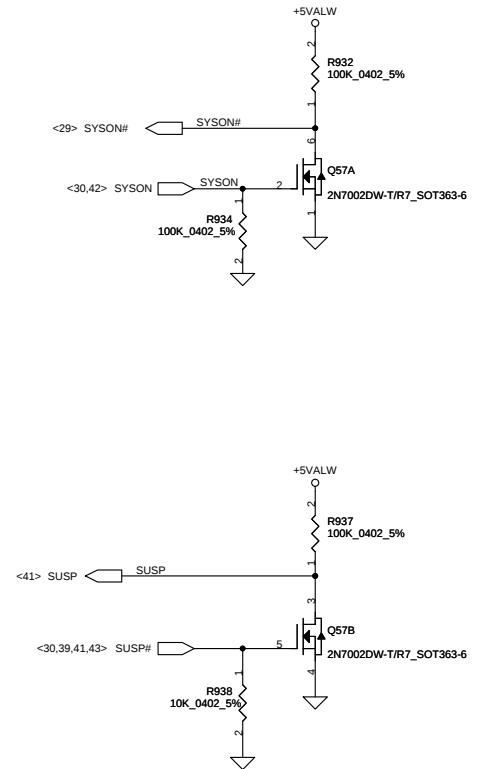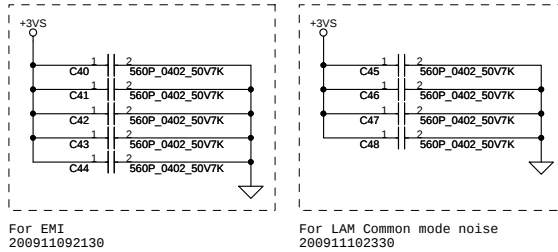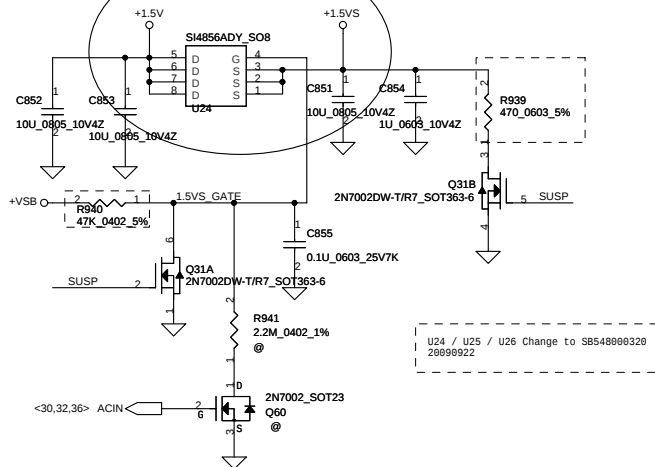


Security Classification				Compal Secret Data				Compal Electronics, Inc.			
Issued Date				2009/5/12				Deciphered Date			
2009/12/31				2009/12/31				Title			
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number				SCHEMATICS,MB A5892			
Date: Tuesday, June 22, 2010				401826				Rev C			
Sheet 35 of 49				Date: Tuesday, June 22, 2010				Sheet 35 of 49			

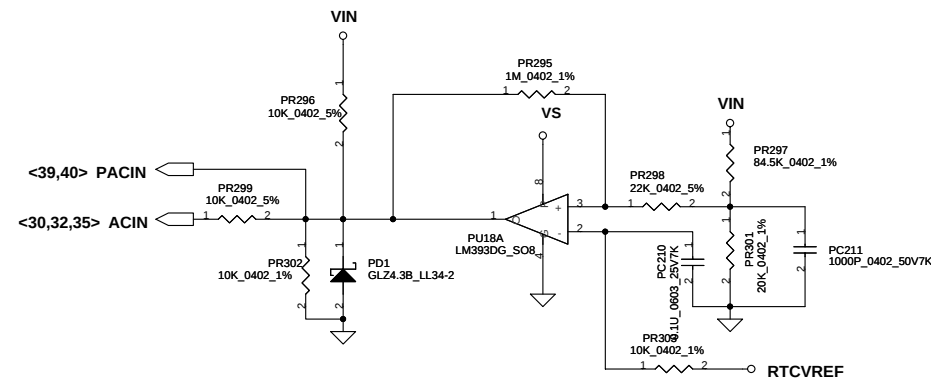



	Min.	Typ	Max.
H-->L	16.976V	17.525V	17.728V
L-->H	17.430V	17.901V	18.384V

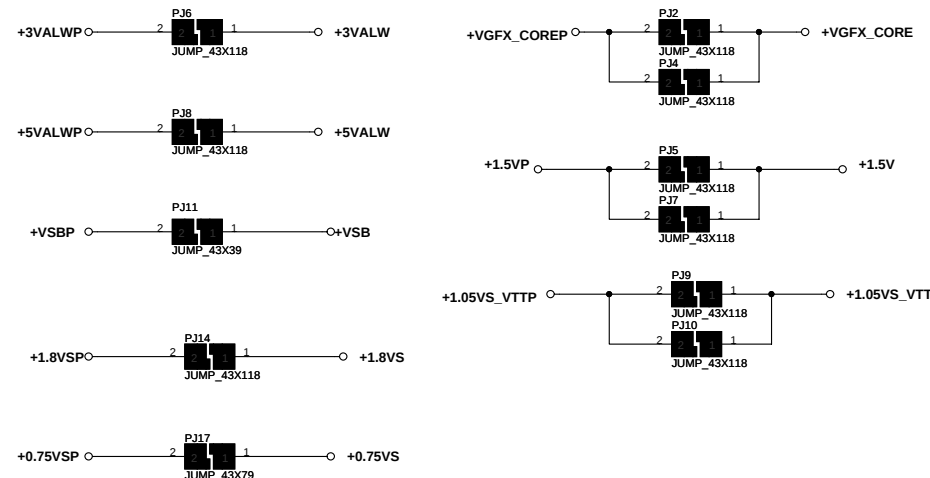

Security Classification	Compal Secret Data			Compal Electronics, Inc.		
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHEMATICS,MB A5892	
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Doc#	Document Number	Rev
				Customer	401826	C
				Date:	Tuesday, June 22, 2010	Sheet 36 of 49

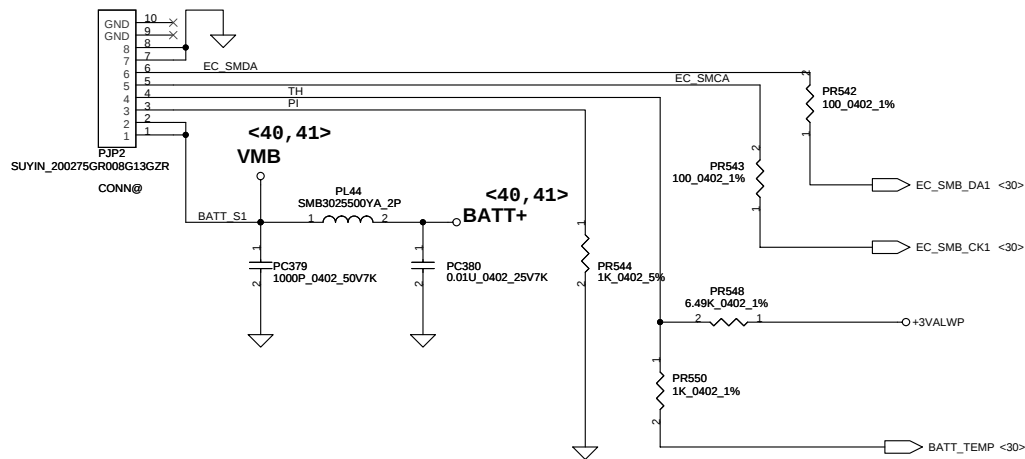

PH1 under CPU botten side :
CPU thermal protection at 92 degree C
Recovery at 56 degree C

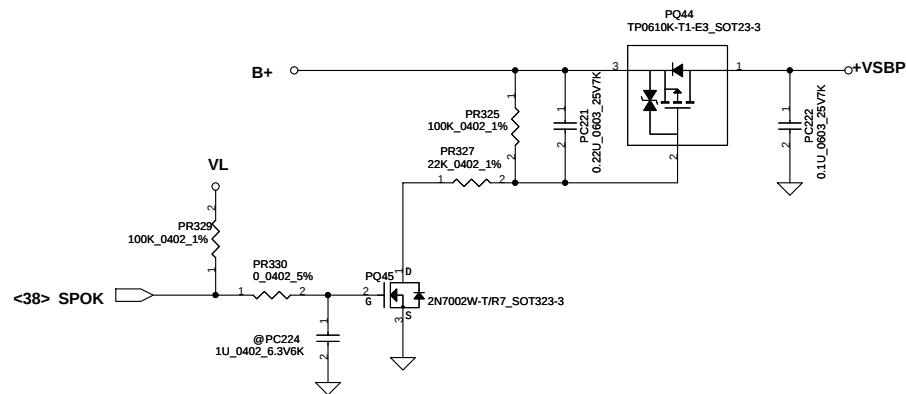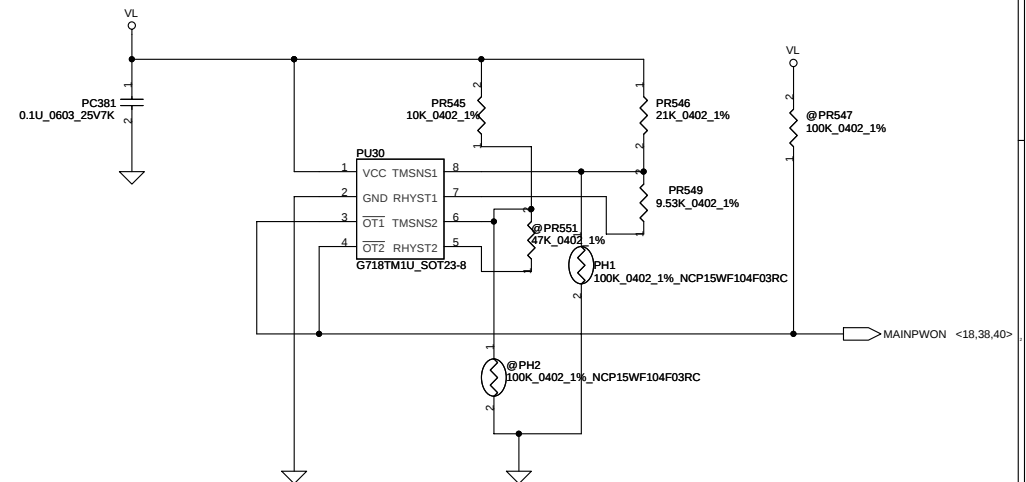



Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Rev	C
				Date:	Tuesday, June 22, 2010
				Sheet	37 of 49

Iada=0~4.74A(90W/19V=4.736A)
Iada=0~3.42A(90W/19V=3.421A)

ADP_I = 19.9*Iadapter*Rsense

CP = 85%*Iada ; CP = 4.07A
CP = 85%*Iada ; CP = 2.91A

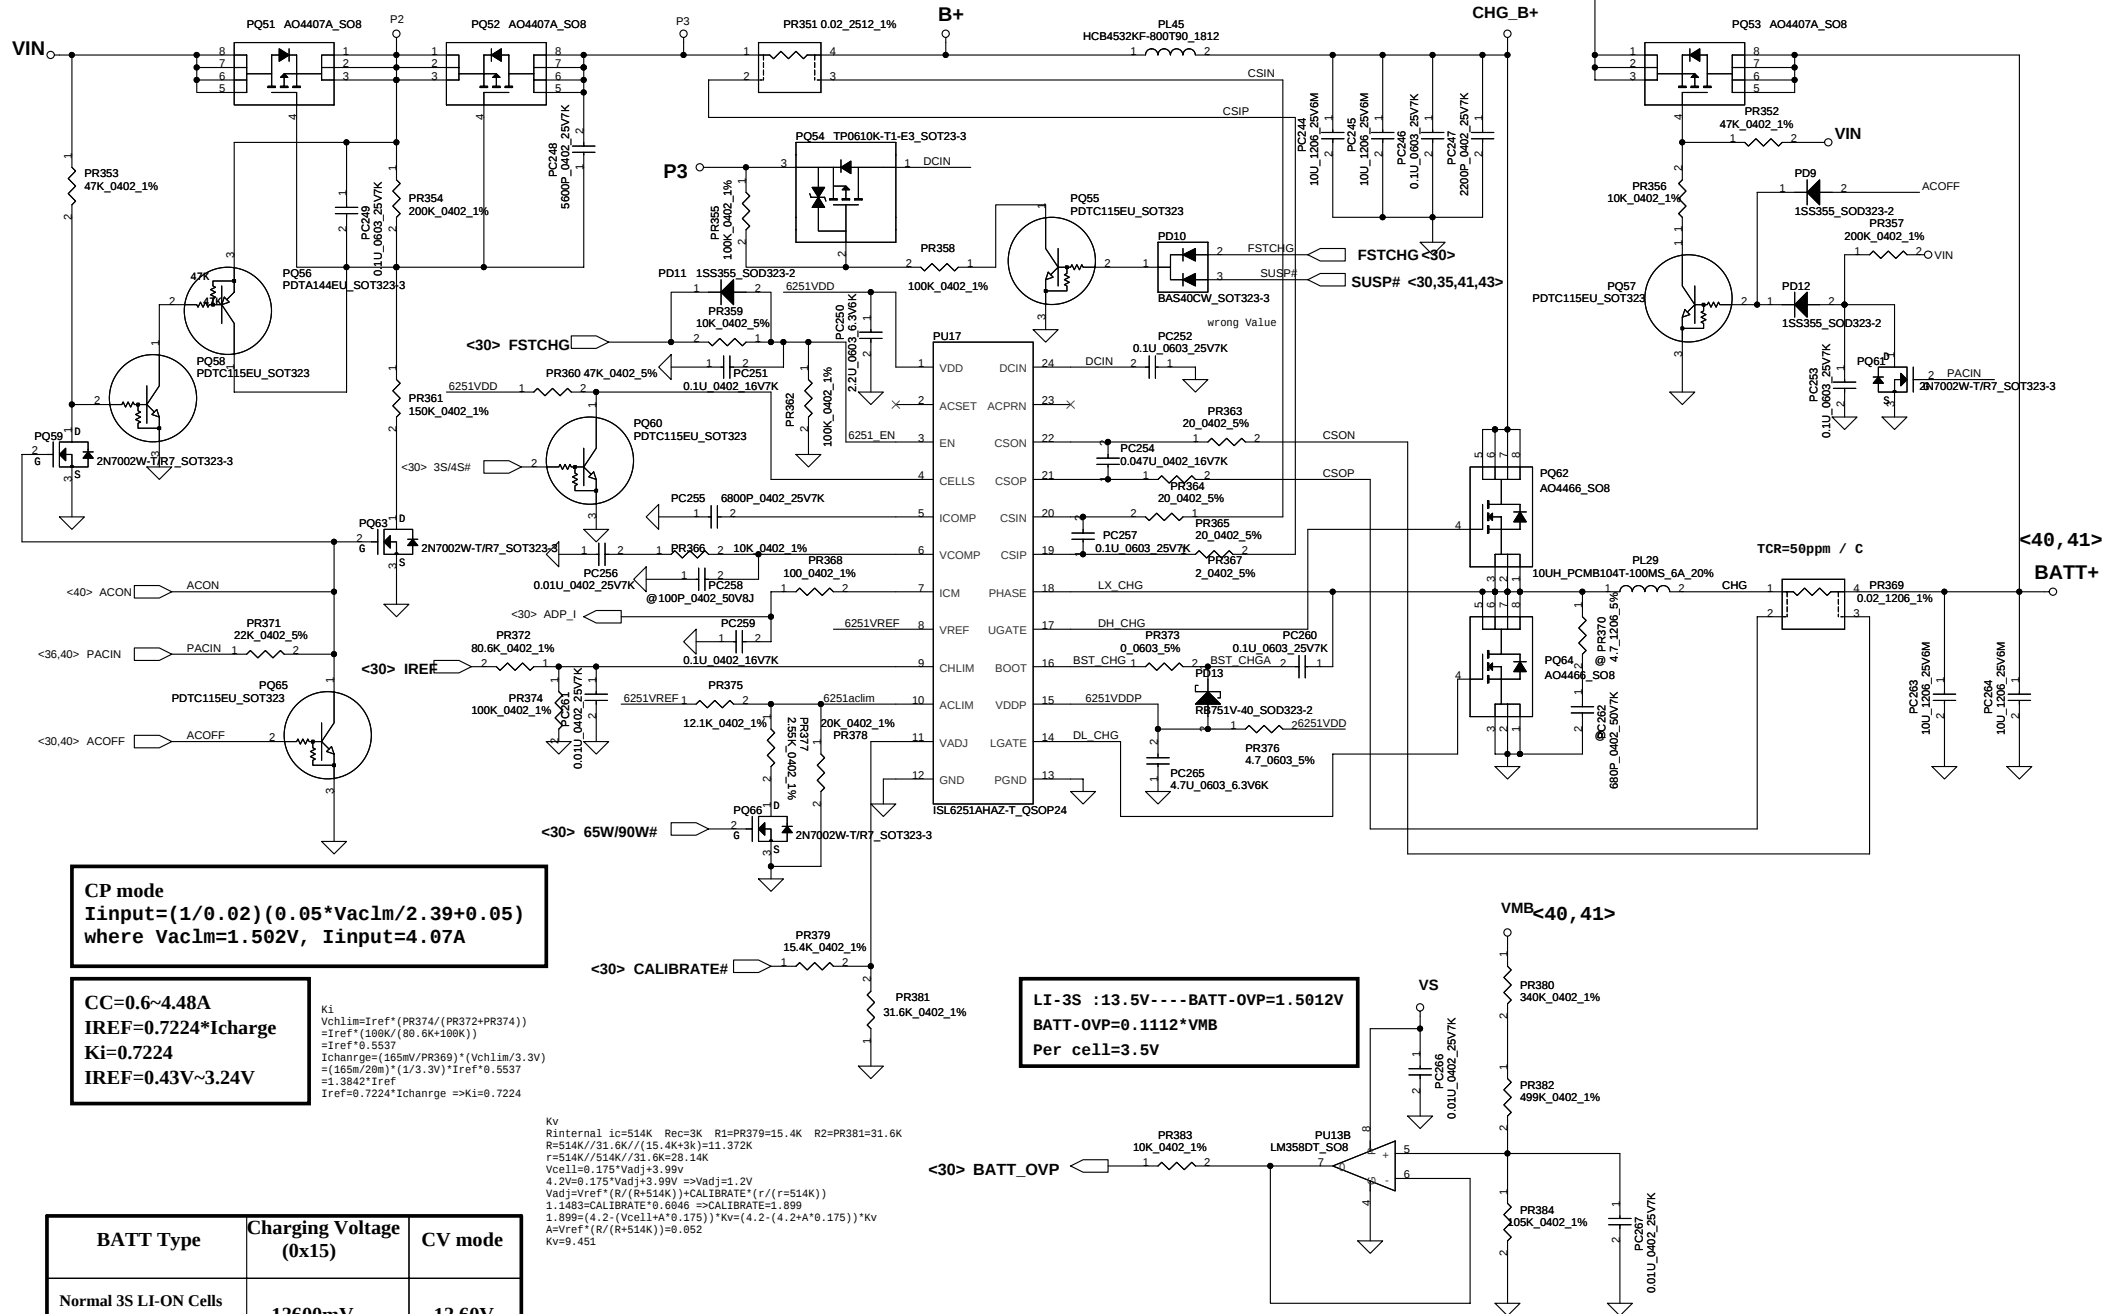

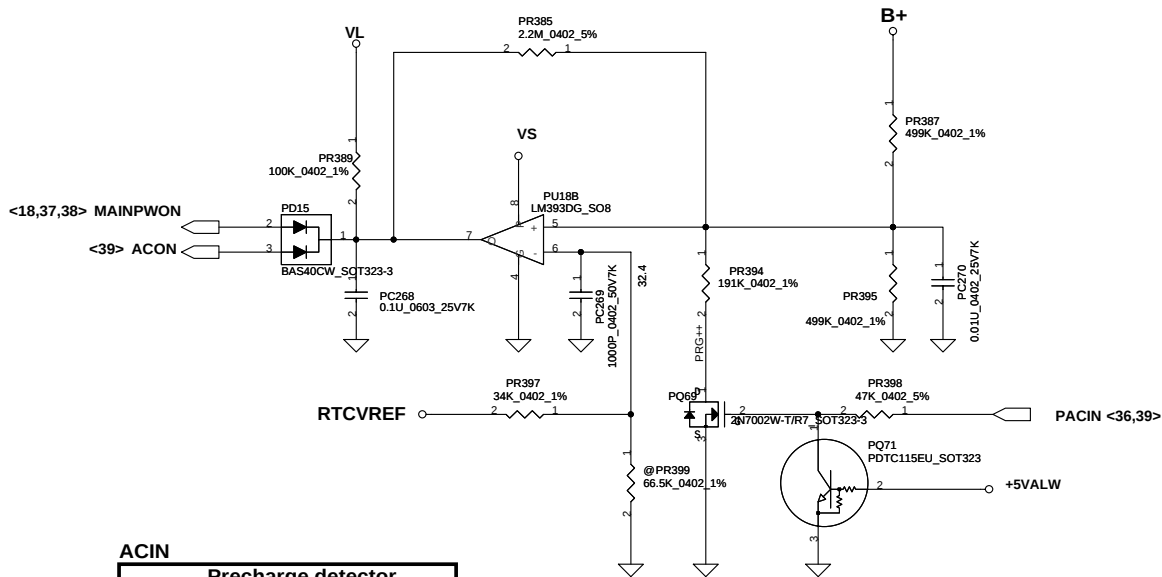


ACIN


	Min.	typ.	Max
H-->L	14.589V	14.84V	15.243V
L-->H	15.562V	15.97V	16.388V

BATT ONLY

	Min.	typ.	Max
H-->L	6.138V	6.214V	6.359V
L-->H	7.196V	7.349V	7.505V

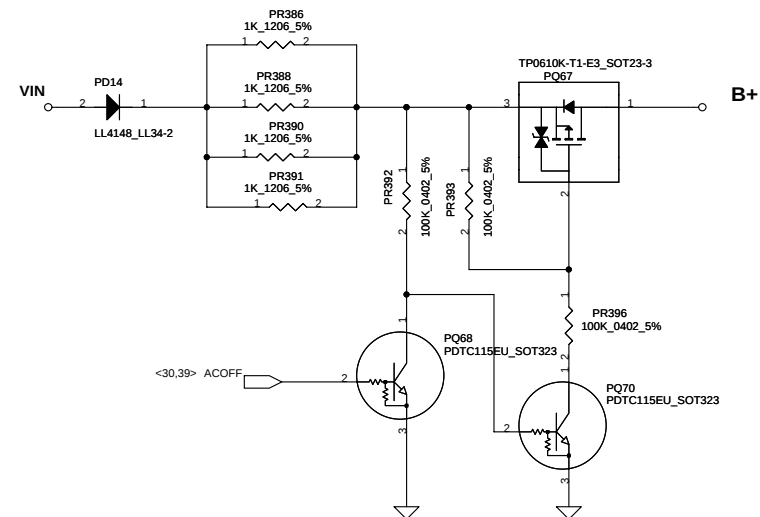


Security Classification	Compal Secret Data		Title	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Rev
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RESEARCH AND DEVELOPMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Rev
Document Number				C
Date: Tuesday, June 22, 2010				Sheet 40 of 49

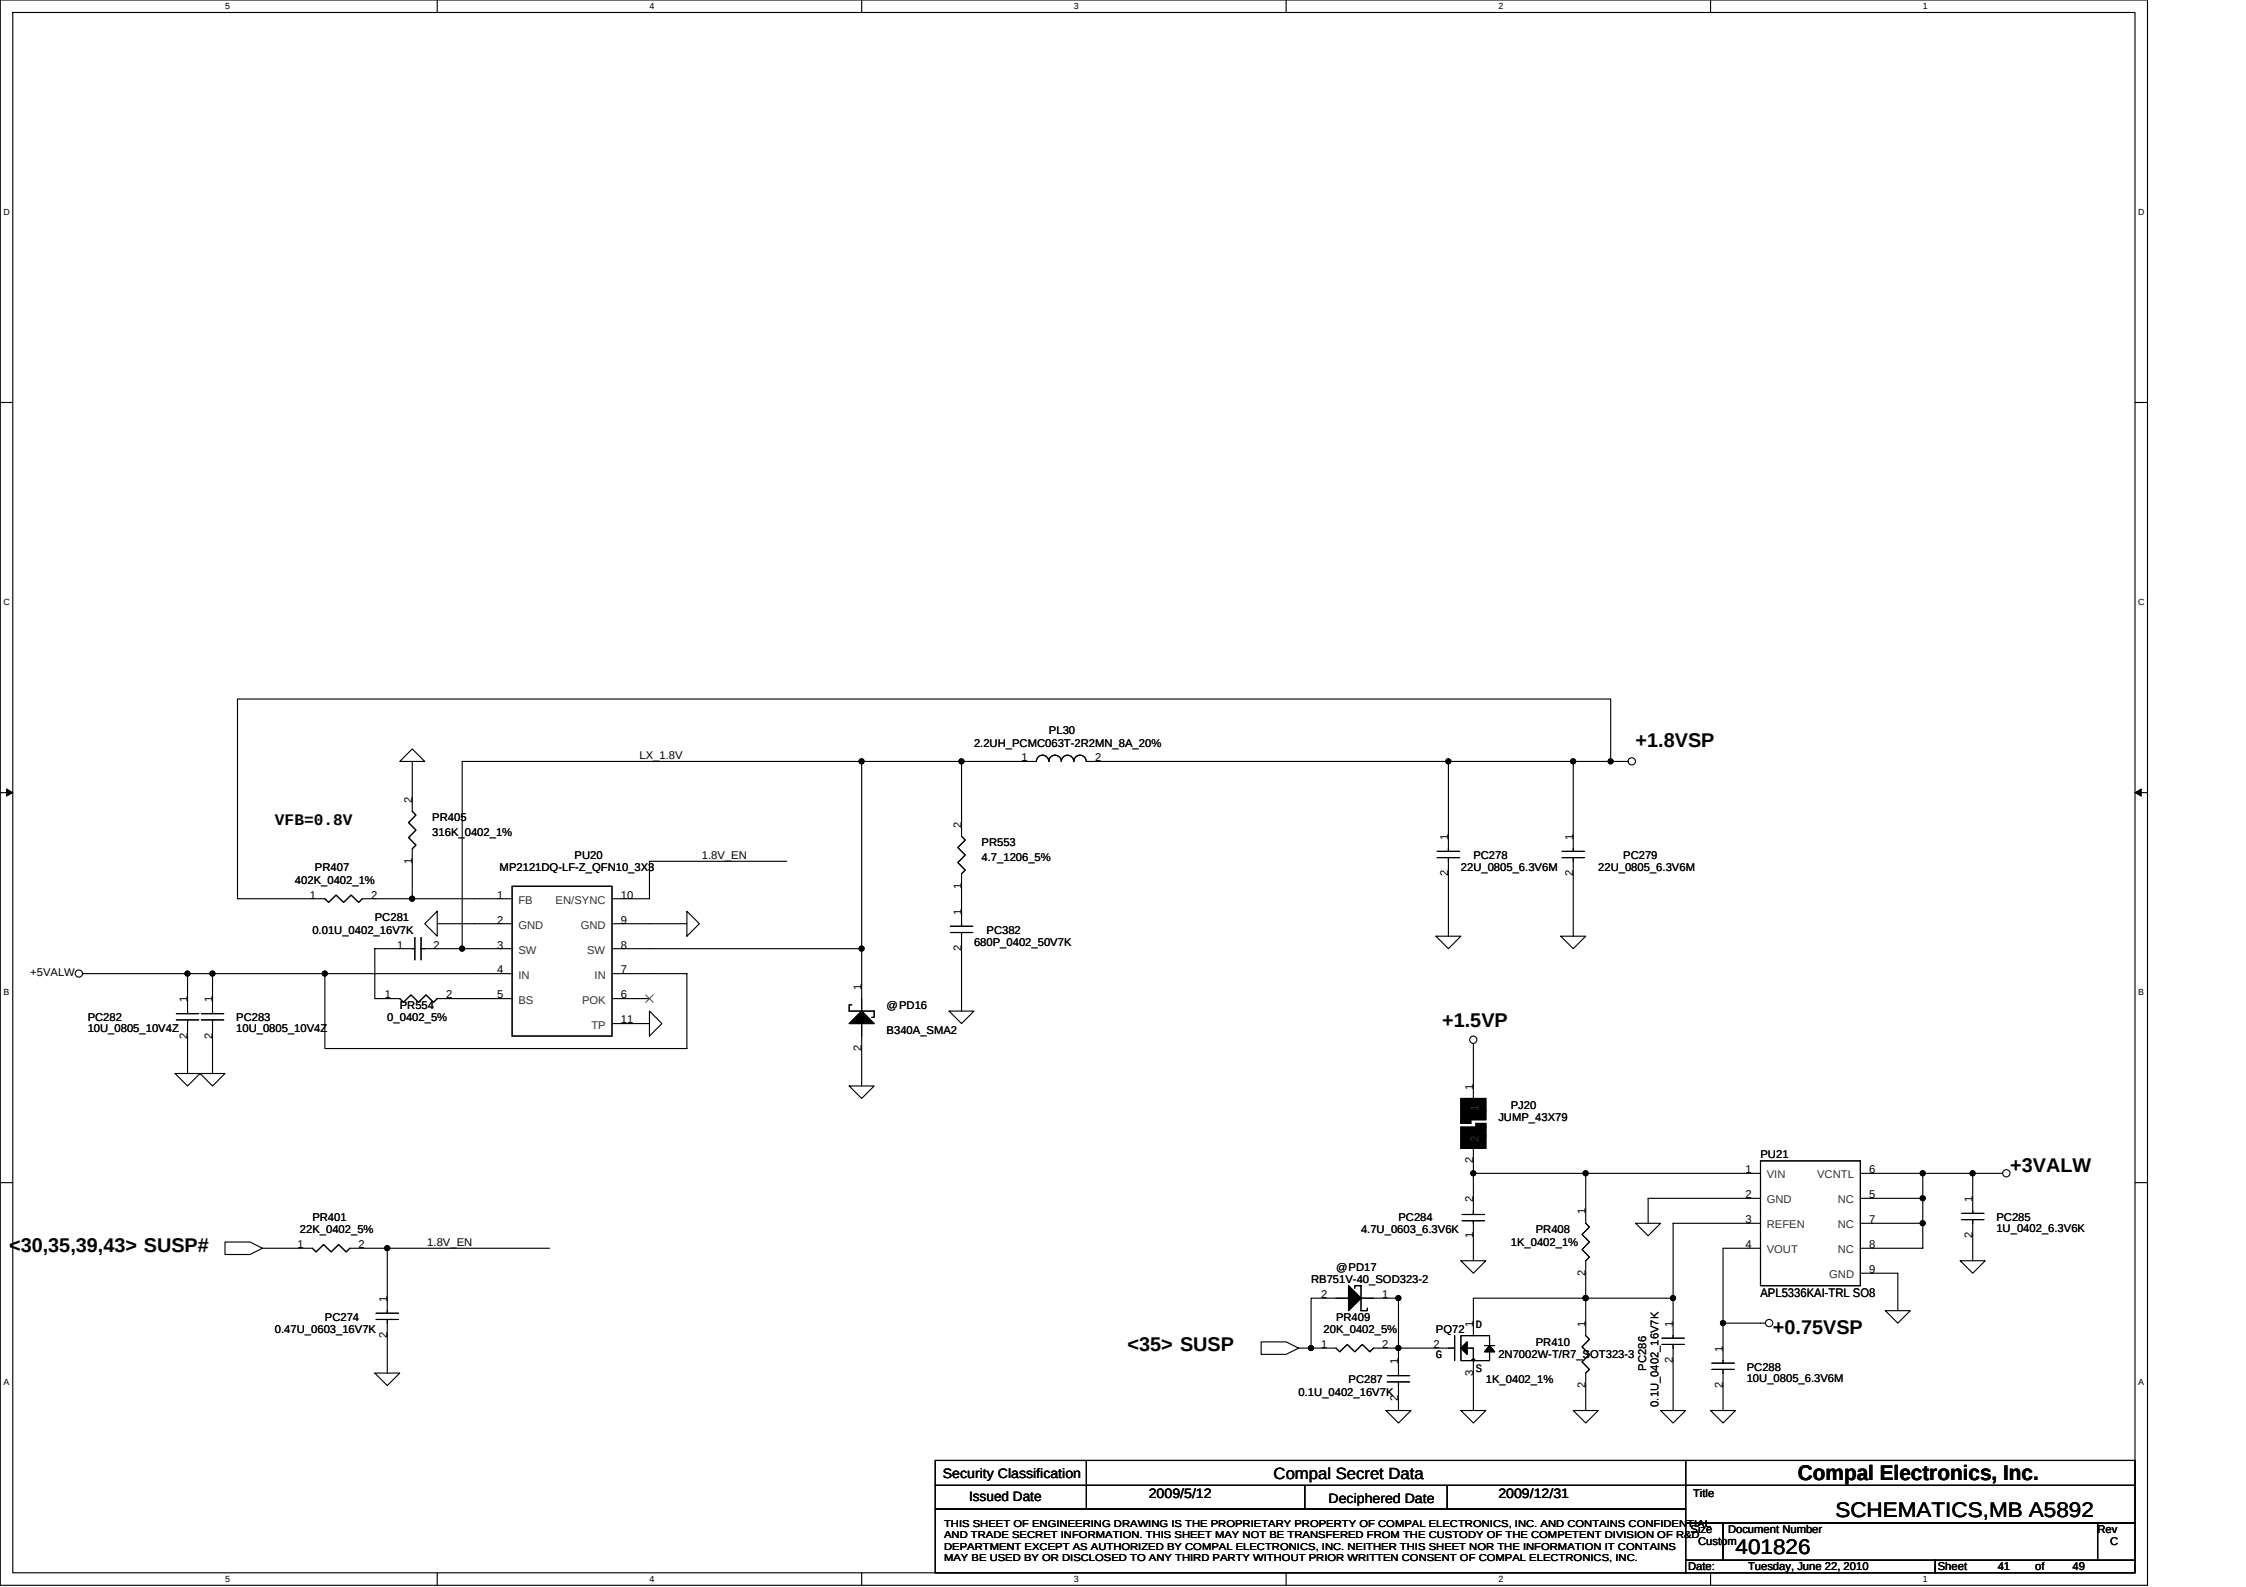


Security Classification	Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number
				401826
				Rev C
				Date: Tuesday, June 22, 2010
				Sheet 41 of 49

Because +1.5VSP has 17.74A power budget, it includes DDR3, VGA chip, VRAM, so must use molding choke.



Security Classification		Compal Secret Data		Compal Electronics, Inc.		
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title SCHEMATICS,MB A5892		
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Docu- ment Number	Rev C	
				401826		
				Tuesday, June 22, 2010	Sheet 42 of 49	

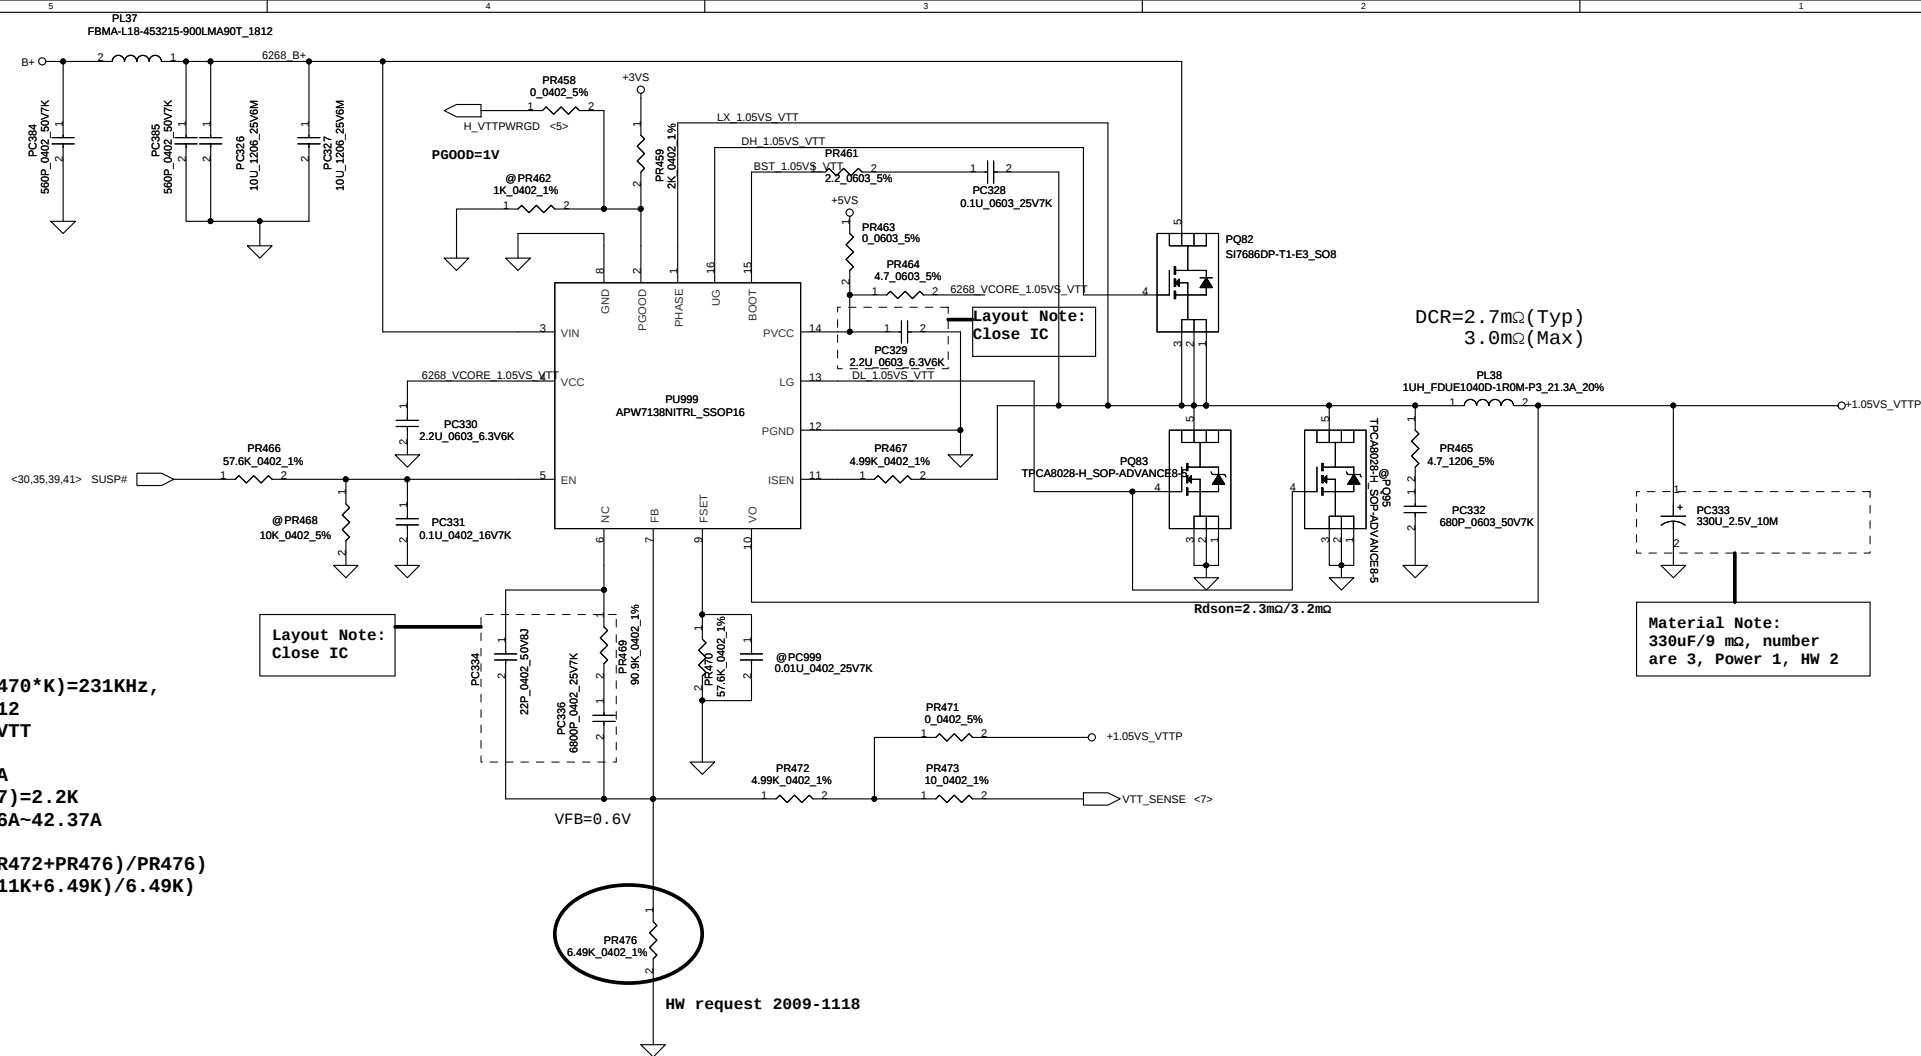


$F_{sw} = 1 / (PR470 * K) = 231 \text{ KHz}$,
 $K = 75 * 10^{-12}$
 $+1.05VSP_VTT$
 $I_{peak} = 25A$
 $I_{max} = 17.5A$
 $R_{sen}(PR467) = 2.2K$
 $I_{ocp} = 30.96A \sim 42.37A$

$V_o = V_r * ((PR472 + PR476) / PR476)$
 $= 0.6 * ((5.11K + 6.49K) / 6.49K)$
 $1.07V$

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHEMATICS, MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Size Custom 401826	Rev C
				Date: Tuesday, June 22, 2010	Sheet 43 of 49

Intel Auburndale CPU(Integrate Graphics) Ipeak=22A Imax=15A
 OCP calculation : Assume DCR=1.1m ohm
 $G1=Rn/(Rn+Rsum)=0.617$
 where $Rn=PR277 // (PR274+PH3)=5.875k$ ohm
 $Rsum=PR269=3.65k$ ohm
 $LL=2 \times Rdroop \times G1 \times DCR / Ri = 6.96m$ V/A
 where $Rdroop=PR271=8.66k$ ohm, $Ri=PR283=1.69k$ ohm
 $Iocp=OCP \text{ Threshold} \times Rdroop / LL=24.89A$

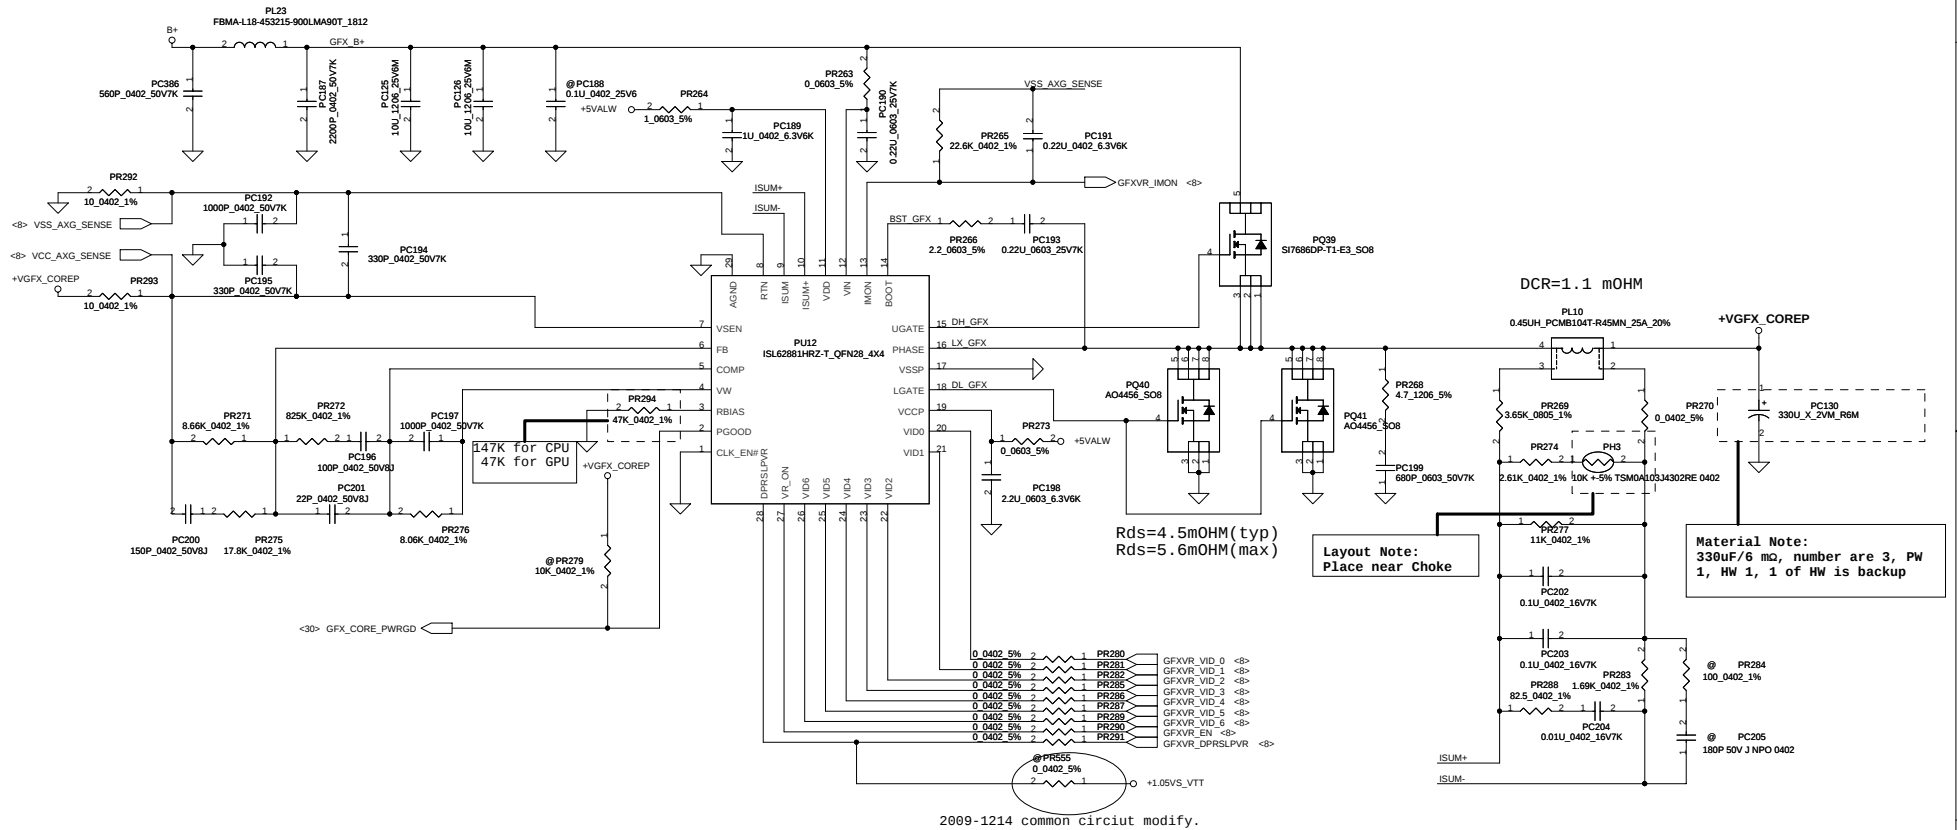

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date		2009/5/12	Deciphered Date		2009/12/31
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.		Title			
		SCHEMATICS,MB A5892			
		Size	Document Number	Rev	
			401826	C	
Date:		Tuesday, June 22, 2010		Sheet	44 of 49

PH0	PH1	# of PH
0	1	2
1	1	3

	HFM_VID	HFM_Icc	LL	Icc_TDC	Icc_Dyn
Auburndale 45W	1.075	50	1.9m	37	35
Auburndale 35W	0.975	38	1.9m	29	27
Clarksfield SV	0.95	51	1.9m	38	39
Clarksfield XE	0.95	65	TBD	48	TBD

ADP3212MNR2G_QFN48_7X7

Place PH1 close to PHASE 1 inductor on the same layer

EMI request to mount the caps.(2009-1109)

EMI request to reserve cap.(2009-1109)

Version change list (P.I.R. List)

Page 1 of 3
for PWR

Item	Fixed Issue	Reason for change	Rev.	PG#	Modify List	Date	Phase
1	Arrandale CPU of UMA SKU only use 1 LS MOS	Arrandale CPU of UMA SKU only use 1 LS MOS	0.1	45	1 pop PQ87, PQ90, un-pop PQ86. 2 Delete PQ89, PQ93 SB00000GL00(S TR TPCA8028-H 1N SOP ADVANCE 4 PC A false)	2009-1019	to DVT
2	BOM unique.	In order to BOM unique for 1SS355, re-link PD8.	0.1	38	Change PD8 from SC1SS355003 to SC100001K00	2009-1019	to DVT
3	CIS link error.	CIS link error.	0.1	45	Chnage PR500 from SD028100A00(S RES 1/16W 10 +-5% 0402) to SD028100A80(S RES 1/16W 10 +-5% 0402)	2009-1019	to DVT
4	BOM unique.	BOM unique.	0.1	39	Chnage PC265 from SE107475M80(S CER CAP 4.7U 6.3V M X5R 0603 to SE107475K80(S CER CAP 4.7U 6.3V K X5R 0603)	2009-1019	to DVT
5	BOM unique.	BOM unique.	0.1	41	Chnage PC284 from SE107475M80(S CER CAP 4.7U 6.3V M X5R 0603 to SE107475K80(S CER CAP 4.7U 6.3V K X5R 0603)	2009-1019	to DVT
6	BOM unique.	BOM unique.	0.1	45	Chnage PC350 from SE107475M80(S CER CAP 4.7U 6.3V M X5R 0603 to SE107475K80(S CER CAP 4.7U 6.3V K X5R 0603)	2009-1019	to DVT
7	BOM unique.	BOM unique.	0.1	38	Change PC225/PC227 from SE153106K80(S CER CAP 10U 25V K X6S 1206) to SE142106M80 (S CER CAP 10U 25V M X5R 1206)	2009-1019	to DVT
8	BOM unique.	BOM unique.	0.1	45	Change PC339/PC341 from SE153106K80(S CER CAP 10U 25V K X6S 1206) to SE142106M80 (S CER CAP 10U 25V M X5R 1206)	2009-1019	to DVT
9	BOM unique.	BOM unique.	0.1	43	Change PQ83 from SB00000I900(S TR AON6704L 1N DFN) to SB00000GL00(S TR TPCA8028-H 1N SOP)	2009-1019	to DVT
10	VTT Power rail commond design.	VTT Power rail commond design.	0.1	43	Delete PQ95 SB00000GL00(S TR TPCA8028-H 1N SOP)-X63826B0L11 Delete PQ95 SB00000I900(S TR AON6704L 1N DFN)-OTHERS	2009-1019	to DVT
11	Charger, EMI request.	EMI request to add a bead to replace Jump to PASS EMI test.	0.2	39	Add PL45 SM010018210(S SUPPRE_TAI-TECH HCB4532KF-800T90 1812)	2009-1105	to DVT
12	+VSBP, EMI request.	EMI request to add PC221/PC222 to PASS EMI test	0.2	37	Add PC221 SE000005Z80 S CER CAP .22U 25V K X7R 0603 Add PC222 SE042104K80 S CER CAP .1U 25V K X7R 0603	2009-1105	to DVT
13	+1.8VSP, BOM error.	+1.8VSP EN delete wrong. Must add PR401 and PC274 for SUSP# enable.	0.2	41	Add PR401 SD028220280 S RES 1/16W 22K 0402 5% Add PC274 SE026474K80 S CER CAP 0.47U 16V K X7R 0603	2009-1105	to DVT
14	+1.5VP, EMI request.	EMI request add snubber for +1.5VP to PASS EMIU test.	0.2	42	Add PR415 SD001470B80 S RES 1/4W 4.7 +-5% 1206 Add PC294 SE025681K80 S CER CAP 680P 50V K X7R 0603	2009-1105	to DVT
15	+1.5VP, EMI request.	EMI request add a small cap to reduce high Freq noise. EMI request change boost R to 2.2 ohm.	0.2	42	Add PC383 SE074561K80 S CER CAP 560P 50V K X7R 0402 Change PR414 from SD013000080 to SD013220B80	2009-1105	to DVT
16	+1.05VS_VTTP EMI request.	EMI request add two small cap to reduce high Freq noise.	0.2	43	Add PC384 SE074561K80 S CER CAP 560P 50V K X7R 0402 Add PC385 SE074561K80 S CER CAP 560P 50V K X7R 0402	2009-1105	to DVT
17	+1.05VS_VTTP EMI request.	EMI request add snubber for +1.05VS_VTTP to PASS EMIU test.	0.2	43	Add PR465 SD001470B80 S RES 1/4W 4.7 +-5% 1206 Add PC332 SE024681J80 S CER CAP 680P 50V J NPO 0603	2009-1105	to DVT
18	+1.05VS_VTTP EMI request.	EMI request change boost R to 2.2 ohm.	0.2	43	Change PR461 from SD013000080 to SD013220B80	2009-1105	to DVT
19	+1.05VS_VTTP, HW request.	HW request to increase +1.05VS_VTTP voltage.	0.2	43	Change PR472 from SD034499180 to SD034649180.	2009-1105	to DVT
20	+GFX_COREP, EMI request.	EMI request add a small cap to reduce high Freq noise.	0.2	44	Add PC386 SE074561K80 S CER CAP 560P 50V K X7R 0402	2009-1105	to DVT
21	+GFX_COREP, EMI request.	EMI request add snubber for +1.05VS_VTTP to PASS EMIU test.	0.2	44	Add PR268 SD001470B80 S RES 1/4W 4.7 +-5% 1206 Add PC199 SE024681J80 S CER CAP 680P 50V J NPO 0603	2009-1105	to DVT
22	+GFX_COREP, EMI request.	EMI request change boost R to 2.2 ohm.	0.2	44	Change PR266 from SD013000080 to SD013220B80	2009-1105	to DVT

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RESEARCH AND DEVELOPMENT DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
Date:	Tuesday, June 22, 2010		Sheet	46	of 49

Version change list (P.I.R. List)

Page 2 of 3 for PWR

Item	Fixed Issue	Reason for change	Rev.	PG#	Modify List	Date	Phase
24	+CPU_COREP, EMI request.	EMI request add a small cap to reduce high Freq noise.	0.2	45	Add PC387 SE074561K80 S CER CAP 560P 50V K X7R 0402	2009-1105	to DVT
25	+CPU_COREP, EMI request.	EMI request change boost R to 2.2 ohm.	0.2	45	Change PR498/PR509 from SD013000080 to SD013220B80	2009-1105	to DVT
26	+CPU_COREP, EMI request.	EMI request add snubber for +CPU_COREP to PASS EMIU test.	0.2	45	Add PR499/PR512 SD001470B80 S RES 174W 4.7 +-5% 1206 Add PC347/PC359 SE024681J80 S CER CAP 680P 50V J NPO 0603	2009-1105	to DVT
27	+CPU_COREP, Transient Loadline issue.	LA5892 transient and loadline must change some value to meet intel spec.	0.2	45	Change PL40/PL41 from SH000005680 to SH0000012036BM00.	2009-1105	to DVT
28	+CPU_COREP, Transient Loadline issue.	LA5892 transient and loadline must change some value to meet intel spec.	0.2	45	Change PR524/PR525 from SD013120380 to SD013137380.	2009-1105	to DVT
29	+CPU_COREP, Transient Loadline issue.	LA5892 transient and loadline must change some value to meet intel spec.	0.2	45	Change PC362 from SE074391K80 S CER CAP 390P 50V K X7R 0402 to SE074561K80 S CER CAP 560P 50V K X7R 0402	2009-1105	to DVT
30	+CPU_COREP, Transient Loadline issue.	LA5892 transient and loadline must change some value to meet intel spec.	0.2	45	Change PR501 from SD034536180 S RES 5.36K 0402 1% to SD034549180 S RES 1/16W 5.49K 0402 1%	2009-1105	to DVT
31	+CPU_COREP, EMI request.	+CPU_COREP, EMI request.	0.3	45	Add PC388 SE074102K80 S CER CAP 1000P 50V K X7R 0402	2009-1113	to DVT
32	+CPU_COREP, EMI request.	+CPU_COREP, EMI request.	0.3	45	Add PC389 SE074222K80 S CER CAP 2200P 50V K X7R 0402 Add PC390 SE074561K80 S CER CAP 560P 50V K X7R 0402	2009-1113	to DVT
33	+CPU_COREP, cost issue.	Beuase SF000000G80 will cost uo, change to SF22004M210.	0.3	45	Change PC343 from SF000000G80 to SF22004M210.	2009-1113	to DVT
34	+CPU_COREP, IMON issue.	Because Intel update IMON RC time constant, update PC348 to 0.068u to meet spec.	0.3	45	Change PC348 from SE076103K80 S CER CAP .01U 16V K X7R 0402 to SE000003J80 S CER CAP 0.068U 16V K X7R 0402	2009-1113	to DVT
35	+3V/+5V cost issue.	Because Nippon cost up thier OS-CON cap, so we change Nippon cap to Sanyo cap by sourcer request.	0.4	38	Change PC233/PC237 from SF22001M300 S ELE CAP 220U 6.3V M F60(6.3X5.7) PXC to SF22001M200 S ELE CAP 220U 6.3V M B C6 SVPC ESR15	2009-1118	to DVT
36	+1.05VS_VTTP issue.	HW request to increase +1.05VS_VTTP voltage.	0.4	43	Change PR472 from SD034649180 to SD034511180.	2009-1118	to DVT
37	+1.05VS_VTTP issue.	HW request to increase +1.05VS_VTTP voltage.	0.4	43	Chnage PR476 from SD034665180 to SD034649180.	2009-1118	to DVT
38	+0.75VSP power sequence issue.	HW request to adjust power sequence.	0.4	47	change PR409 from SD028000080 S RES 0 0402 5% to SD028200280 S RES 1/16W 20K 0402 5%.	2009-1118	to DVT
39	+1.05VS_VTTP issue.	+1.05VS_VTTP choke unique to +1.5VP.	0.4	43	Change PL38 from SH000008V80 S COIL 1UH +-20% PCMB103E-1R0MS 20A to SH000009U00 S COIL 1UH +-20% FDUE1040D-1R0M=P3 21.3A	2009-1118	to DVT
40	+1.05VS_VTTP 2nd source issue.	In order to phase in 2nd source, change ISL6268 to APW7138.	0.5	43	Change PU26 from SA00001HT80 S IC ISL6268CAZ-T SSOP 16P to PU999 SA000020600 S IC APW7138NITRL SSOP 16P	2009-1208	to PVT
41	+1.05VS_VTTP 2nd source issue.	APW7138 needn't pop PC335.	0.5	43	Delete PC335 SE075103K80 S CER CAP .01U 25V K X7R 0402 and change location to PC999.	2009-1208	to PVT
42	HDD LED flash issue.	HDD LED will flash when plug in adapter, because +3VS rise a little. HW request add PC224 to solve it.	0.5	37	Add PC224 SE000000K80 S CER CAP 1U 6.3V X5R 0402	2009-1208	to PVT
43	HDD LED flash issue.	If add PC224, must change PR330 from 0 to 1K to avoid SPOK pin fail. that is add a current limit R on SPOK pin.	0.5	37	Chnage PR330 from SD028000080 to SD028100180.	2009-1208	to PVT
44	BOM error.	+1.8VSP choke use wrong material. Unique MP2121 to other project.	0.5	41	Change PL30 from SH000006I80 S COIL 2.2UH +-20% PCMC063T -2R2MN 8A to SH000009Q00 S COIL 2.2UH 20% MSCDRI-74A-2R2M-E 6.5A Add PR554 SD028000080 0 0402 5%	2009-1208	to PVT
45	+1.05VS_VTTP issue.	HW request to adjust +1.05VS_VTTP Vout.	0.5	43	Change PR472 from SD034511180 to SD034499180.	2009-1208	to PVT
46	+VGF_X_COREP issue	ISL62881 common circiut update.	0.5	44	Delete PR291 SD028000080. Add PR555 SD028000080.	2009-1208	to PVT

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF FACTORY DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
Date:				Tuesday, June 22, 2010	Sheet 47 of 49

Version change list (P.I.R. List)

Page 3 of 3
for PWR


Item	Fixed Issue	Reason for change	Rev.	PG #	Modify List	Date	Phase
24	Sequense issue.	Modify sequense by HW request.	0.6	37	Chnage PR330 from SD028100180 S RES 1/16W 1K +-5% 0402 to SD028000080 S RES 1/16W 0 +-5% 0402.	2010-0112	to Pre-MP
25	Sequense issue.	Modify sequense by HW request.	0.6	37	Delete PC224 SE000000K80 S CER CAP 1U 6.3V K X5R 0402	2010-0112	to Pre-MP
26	EMI issue.	Because EMI has power BB on 250MHz, add HS gate R to solve.	0.6	45	Add PR556/PR557 SD013220B80 S RES 1/10W 2.2 +-5% 0603	2010-0112	to Pre-MP
27	BOM loss update in DVT.	BOM loss update in DVT, change 1.8V choke.	0.6	41	Change PL30 from SH000006180 S COIL 2.2UH +-20% PCMC063T-2R2MM 8A to SH000009Q00 S COIL 2.2UH 20% MSCDRI-74A-2R2M-E 6.5A	2010-0112	to Pre-MP
28	Common circiut update.	GFX_COREP common circiut update.	0.6	44	Add PR291 SD028000080 0 0402 5% Delete PR555 SD028000080 0 0402 5%	2010-0112	to Pre-MP
29	Changer choke issue.	Because Cyntec has qulity issue and can't use in MFG, in order to prevent shortage issue, change to Maglayer.	0.6	39	Chnage PL29 from SH000005Z80 S COIL 10UH +-20% PCMB104T-100MS 6A to SH000009R00 S COIL 10UH +-20% MMD-10DZ-100M-X1 6A	2010-0112	to Pre-MP
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							
42							
43							
44							
45							
46							

Security Classification		Compal Secret Data		Compal Electronics, Inc.	
Issued Date	2009/5/12	Deciphered Date	2009/12/31	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RESEARCH AND DEVELOPMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number 401826	Rev C
Date: Tuesday, June 22, 2010				Sheet 48	of 49


Version change list (P. I. R. List)

Item	Phase	PAGE	DATE	Modifycatio list	Purpose
1			09 / 30	Q9 / Q15 / Q65 / Q14 / Q36 / Q19 / Q31 / Q56 / Q57 Change to SB00000AR10 Q4/Q5/Q6/Q7/Q13/Q24/Q25/Q59/Q61/Q62/Q63/Q20 Change to SB570020120	
2	DVT		11 / 03	Modify WWAN Mini catd PIN define. X1 / X2 Change to SJ132P7KW10. Add PCH SUSCLK net for remove EC crystal. Remove C147. Add F2 for RF team. Add C670 / C671 / C672 / C673 For INTEL Change C217 to 22U and add C221 22U for CRT issue.	
			11 / 05	Add P80DATA PD 100Kohm(R51) for EC common design. Add C40 / C41 / C42 / C43 / C44 for EMI. Add ACIN#(Q16) for ACIN LED(NEW60) Add C45 / C46 / C47 / C48 for LAN Common mode noise Remove net BT_LED#.	
			11 / 09	Add R14 for MINI1 LED Function.	
			11 / 10	Add D13/D14/D16/D23/D24/D25/D26/D30 for ESD Add R836/C760 R338/C555 for RF. L21 Change to SM010012010 L5 Change to SM01000AX00 Change R619/R621 to 680ohm Change R620/R622 to 3.9kohm Y1 Change to SJ100009R00 R841 Change to 3.2k ohm	
			11 / 11	Update Power SCH	
			11 / 16	Change T1 to SP050006B00	
			11 / 17	Change PCH P/N to SA00003N7B0 Change R167 to 470 ohm.	
			11 / 18	Update Power SCH	
3	PVT		12 / 07	C259 / C279 / C692 / C693 Change to SE107475K80 0603 type	
			12 / 09	Reserved R15 (net LOCAL_DIM) / R16 (net COLOR_ENG_EN) for LVDS function. Reserved R307 for +LCDVDD. EC Pin36 for WLAN_LED# (output), Pin 17 for MINI1_LED# (input) EC Pin91 for 3G_LED#(output) & Pin85 for WWAN_LED# (input) Update Power SCH	
			12 / 10	Add R96 PD 100K for LVDS Panel issue.	
			12 / 11	Add C674 / C675 / C676 For EMI. Del SW3 Power on SW Update Power SCH	
			12 / 14	U8 change to SA00000U500	
			12 / 16	R619 / R621 change to 2.2K SD028220180 for LED	
			12 / 17	Q13 / R477 Change to unpop R171 Change to pop,R172 change to unpop for Board ID. Add R777 / R778 For HDM1 Issue.Only pop R778. R751 Change to 2.2K.	
4	PRE MP		01 / 06	ADD PU R951 / R953	
			01 / 11	UNPOP D23 for MIC noise issue. UNPOP R827 / R828, ADD L7 SM070001600 for USB. Update Power SCH Change Q9,Q65,Q15,Q14,Q36,Q19,Q31,Q56,Q57 to SB00000DH00 Change LED1 / LED3 to SC591N85A30 Del L7, Add R827 / R828. Del D26 / D25 Update Power SCH Modify Power SCH NAME	
	MP		05 / 11	Reserve D13 / D24 / D30 @ (ESD)	
			06 / 09	Add NEW7X0@ / PEW51@ BOM Structure fo ID	

For NEW50 / NEW90 LED



For PEW51 project ID



Security Classification	Compal Secret Data			Compal Electronics, Inc.	
Issued Date	2008/07/01	Deciphered Date	2009/12/31	Title	SCHEMATICS,MB A5892
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERRED FROM THE CUSTODY OF THE COMPETENT DIVISION OF RESEARCH AND DEVELOPMENT DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.				Document Number	401826
				Date:	Tuesday, June 22, 2010
				Sheet	49 of 49